

Tidal waters interpolator grid:
Proposed resolution modifications to five segments
Version: 10/3/25

Background

To conduct a dissolved oxygen (DO) criteria assessment in the tidal waters of the Chesapeake Bay, DO data is interpolated to a grid that fills the volume of each segment. The gridded interpolation results are then summarized by segment and time as they are compared to the applicable water quality criteria. A spatial grid exists for the current 3-D interpolation approach. For the new space-time (4-D) interpolation, we want to use the same spatial grid as the 3-D tool (Figure 1). This decision was made for consistency, and due to the work already invested to build this interpolation grid.

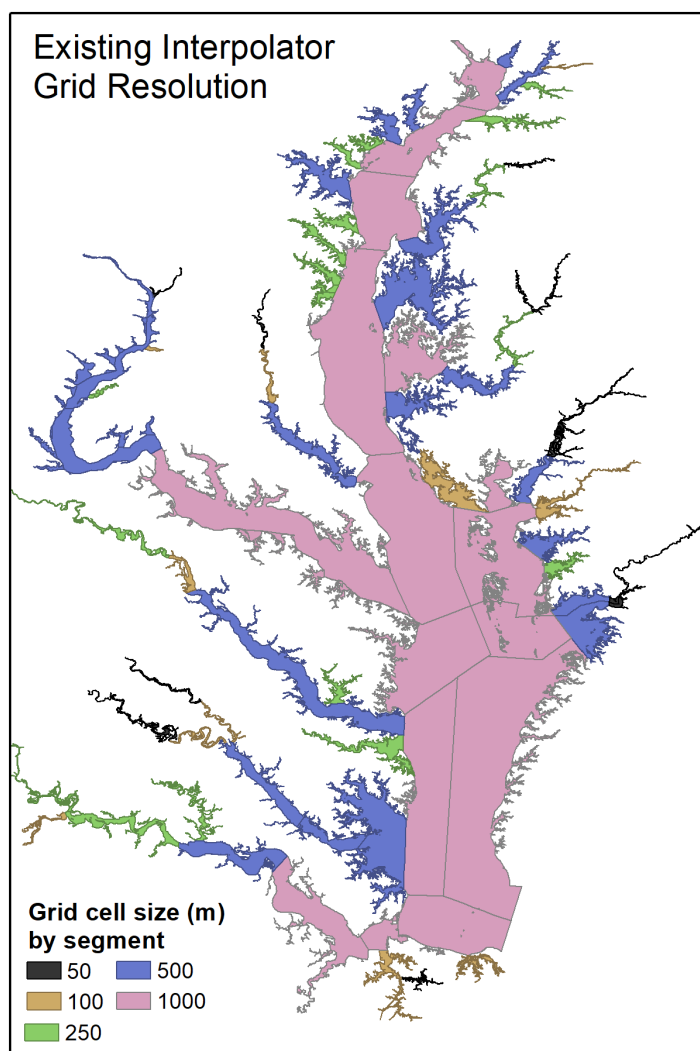


Figure 1. Current interpolator grid horizontal resolution by segment. Grid cell size indicates both length and width dimensions. All cells are 1m deep.

The current (3-D) interpolation grid consists of grid cells that are all 1m deep. The 1m grid cells are stacked in columns that extend to bottom of the water. The number of grid cells in the vertical varies throughout the Bay based on bathymetry. The grid resolution in the horizontal varies by segment and was designed to allow for finer resolution in segments with more constricted geography than in more open regions. All cells are square when viewed from the surface (e.g., dimensions of a 50m cell are 50m long x 50m wide x 1m deep). Figure 1 color-codes the segments by horizontal grid cells size.

The majority of area of the Bay is covered with 1km x 1km grid cells (pink segments in Figure 1). Additional grid cell horizontal resolutions in the tidal tributaries are 500m, 250m, 100m, and 50m. Table 1 presents the count of segments and total surface area covered by each of these grid cell size resolutions.

Table 1. Segment count by grid size

Cell size	Number of segments	Area (km ²)
50 m	15	91
100 m	15	265
250 m	19	497
500 m	26	2,467
1 km	17	8,341

Testing with 4-D interpolation

The draft version of the 4-D interpolator was fit to data in every segment of the Chesapeake Bay for one year. Our goal is to implement the tool so that it could be run on a standard 32-GB laptop for ease of transfer to analysts at partner organizations and states, even if run times are longer than they would be on a workstation.

However, testing demonstrated that it was not possible to perform simulations with a standard 32-GB laptop for four segments: CHOTF, PMKTF, MPNTF, NANO. This is due to both a combination of the high resolution of these segments and the orientation of them that requires the creation an even larger matrix for some of the 4-D computations. All four segments can be run with an older workstation with more RAM. The grid density for these four segments in the water quality interpolator grid is 50 m. One additional segment with a 100 m density (HNGMN) also took a large amount of laptop computer resources in comparison to other segments.

A limited test (focused on NANO) was performed to evaluate whether “thinning the grid” will reduce memory requirements such that the simulations could be performed on a 32-GB laptop. The test ran 2 simulations for each condition (Table 2). Results showed that

thinning the grid to 100m allowed for the segment to be analyzed on a 32-GB laptop, and thinning the grid reduced run time as well.

Table 2. Test using NANO H segment with existing grid (50m) and thinned grid to 100m and 200m.

Segment	Grid Size [m]	Run time [min]
NANO H	50	28.32*
NANO H	100	6.44
NANO H	200	1.56

A complete test was then performed on all five of these segments, thinning them each by half (50m to 100m, and 100m to 200m). Results in Table 3 show that each segment's interpolation was feasible at the thinned resolution on the less powerful laptop with a shorter runtime than on the workstation.

Table 3. Results thinning each of the 5 segments and run times on separate computers.

Segment	Run time [min]	
	Current Grid (128 GB workstation)	½ Thinning (32 GB laptop)
CHOTF	6.85	2.41
MPNTF	12.81	5.59
NANO H	28.32	3.21
PMKTF	19.61	6.67
HNGMN	24.98	8.70

Impact of grid thinning: visual analysis

A map of the entire tidal waters is shown again in Figure 2, with the five segments circled. These five segments are the only segments with proposed changes. Changes to the counts and overall area in each coverage are shown in Table 4. For each of these five, we made maps of what the current resolution looks like, as well as the thinned resolution (Figures 3-7). The final grid coverage may vary slightly from these maps since we will likely reduce the existing grid rather than creating a new grid to fill in the segment as was done for demonstration with these maps.

Figures 3-7 are promising in that it appears the coverage of the segment area is still good with the thinned grids. An additional important test is to be sure the results of a DO interpolation do not lead to significantly different conclusions with a modified grid resolution. We are testing that now and will update this summary with those results.

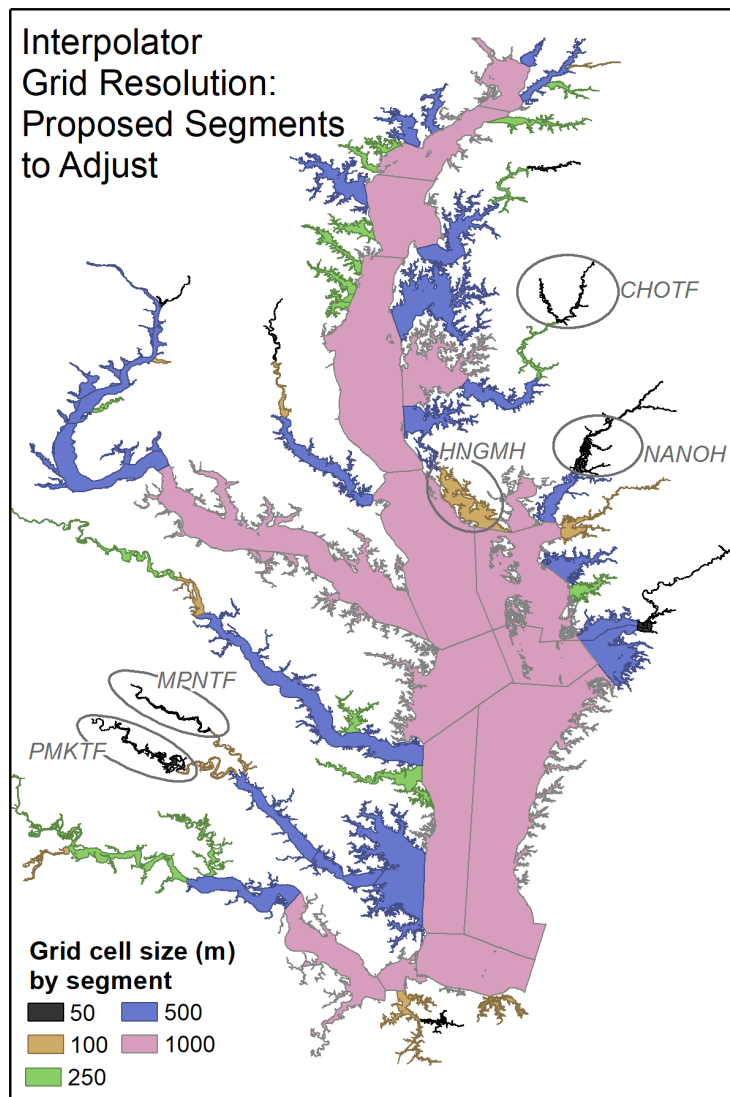


Figure 2. Repeat of Figure 1 showing existing interpolator grid resolution by segment. Five circled segments show the location of the proposed changes.

Table 4. Interpolator grid cell information, current and with thinning. Changes with thinning are shaded.

Cell size	Number of segments		Surface area (km ²)	
	Current	With thinning	Current	With thinning
50 m	15	11	91	40
100 m	15	18	265	218
250 m	19	20	497	595
500 m	26	26	2,467	2,467
1 km	17	17	8,341	8,341

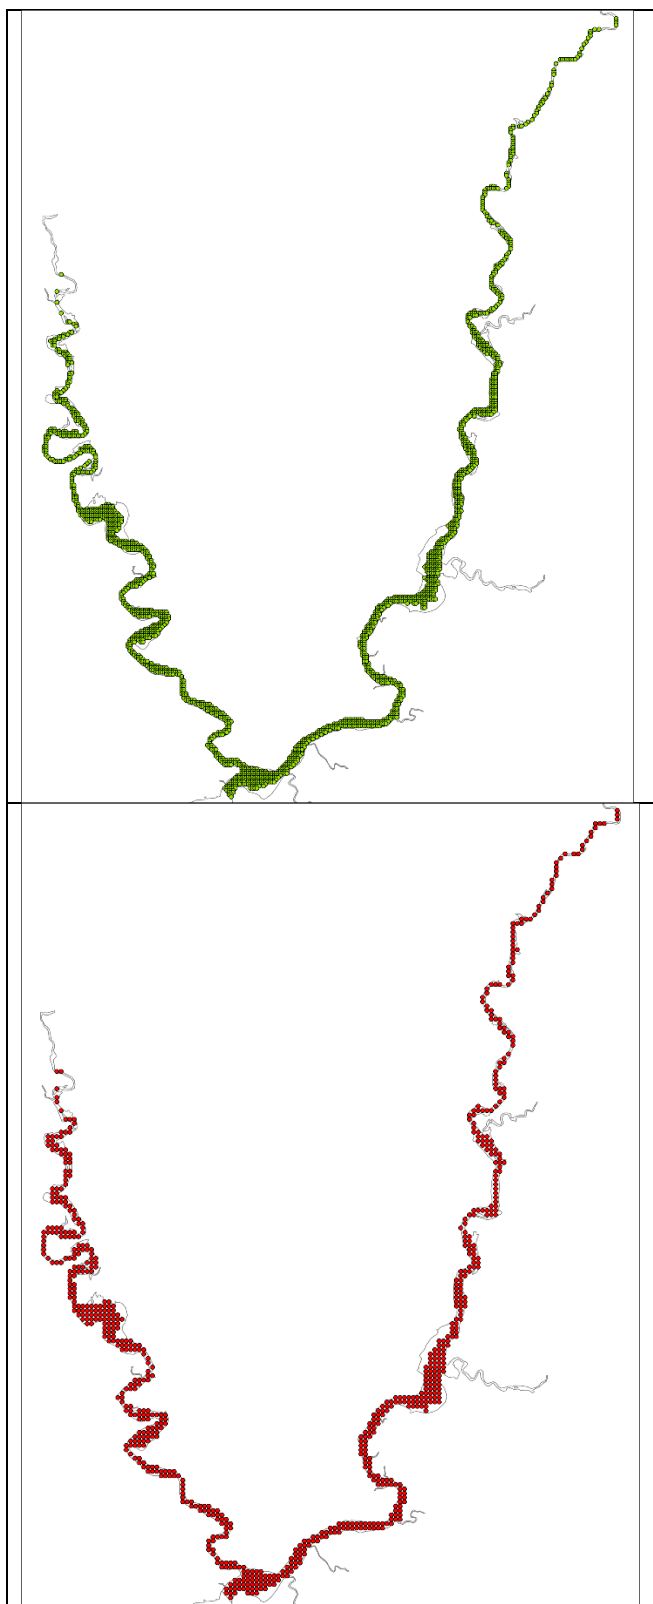


Figure 3a-b: MD Choptank tidal fresh segment (CHOTF) with 50m resolution (top) and 100m resolution (bottom).

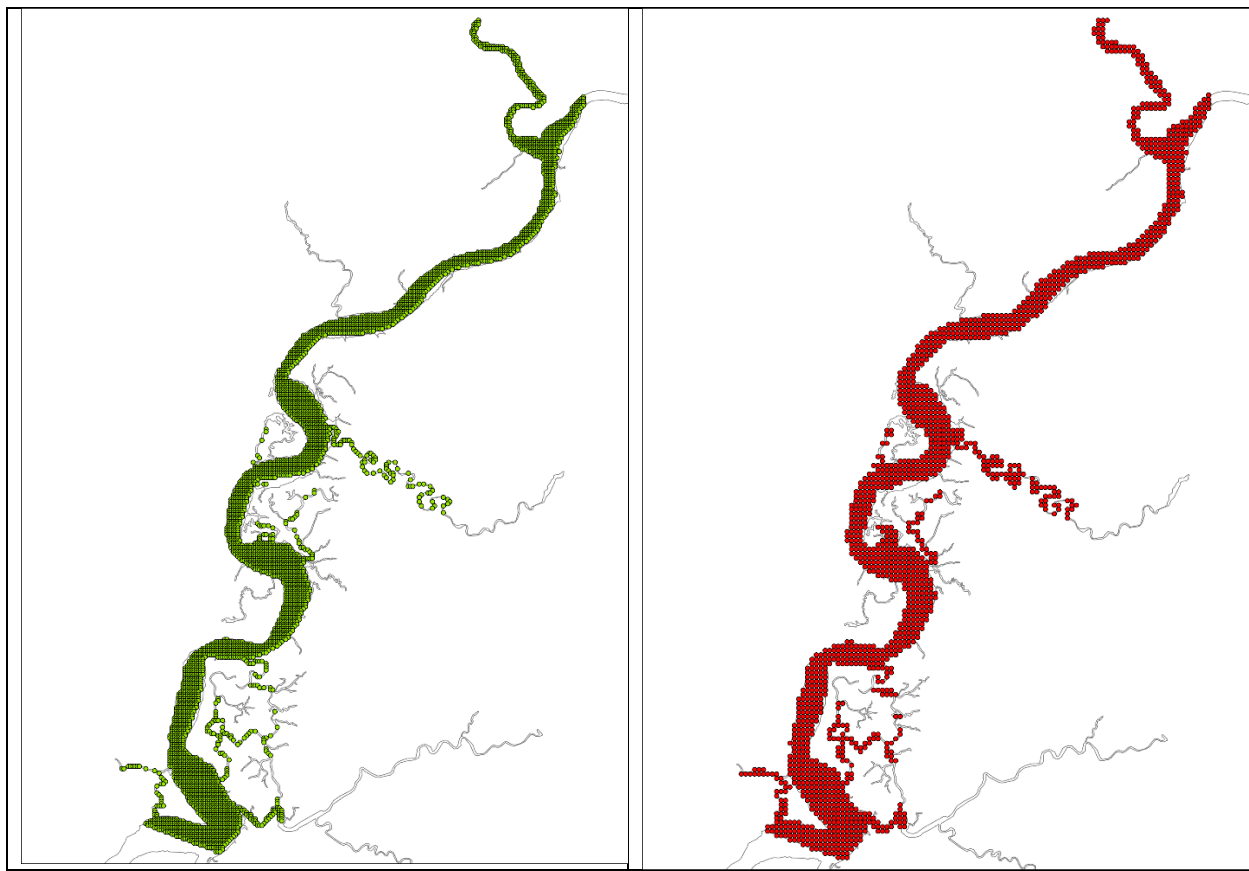


Figure 4a-b: MD Middle Nanticoke River (NANO) with 50m resolution (left) and 100m resolution (right).

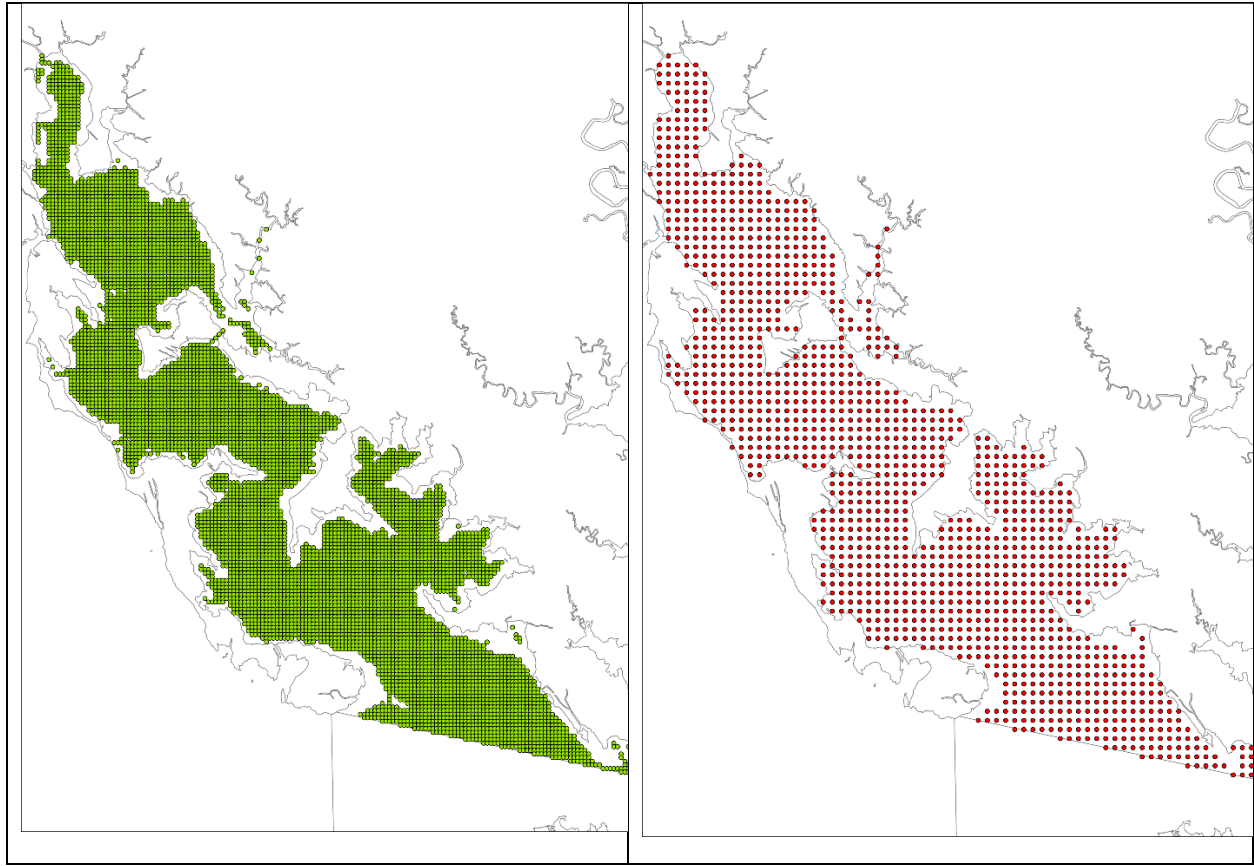


Figure 5a-b: MD Honga River (HNGMH) with 100m resolution (left) and 250m resolution (right).

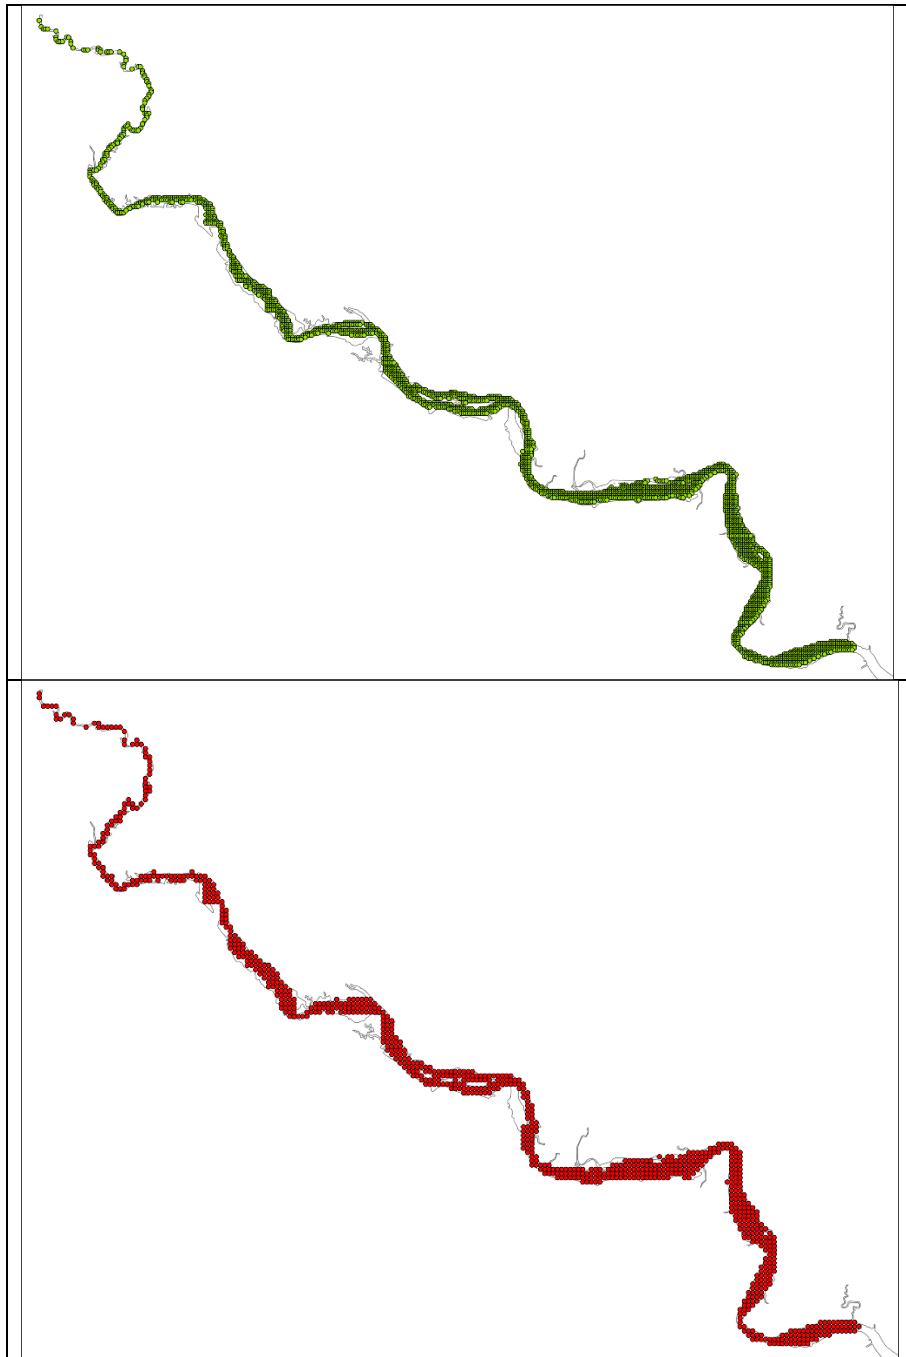


Figure 6a-b: VA Upper Mattaponi River segment (MPNTF) with 50m resolution (top) and 100m resolution (bottom).

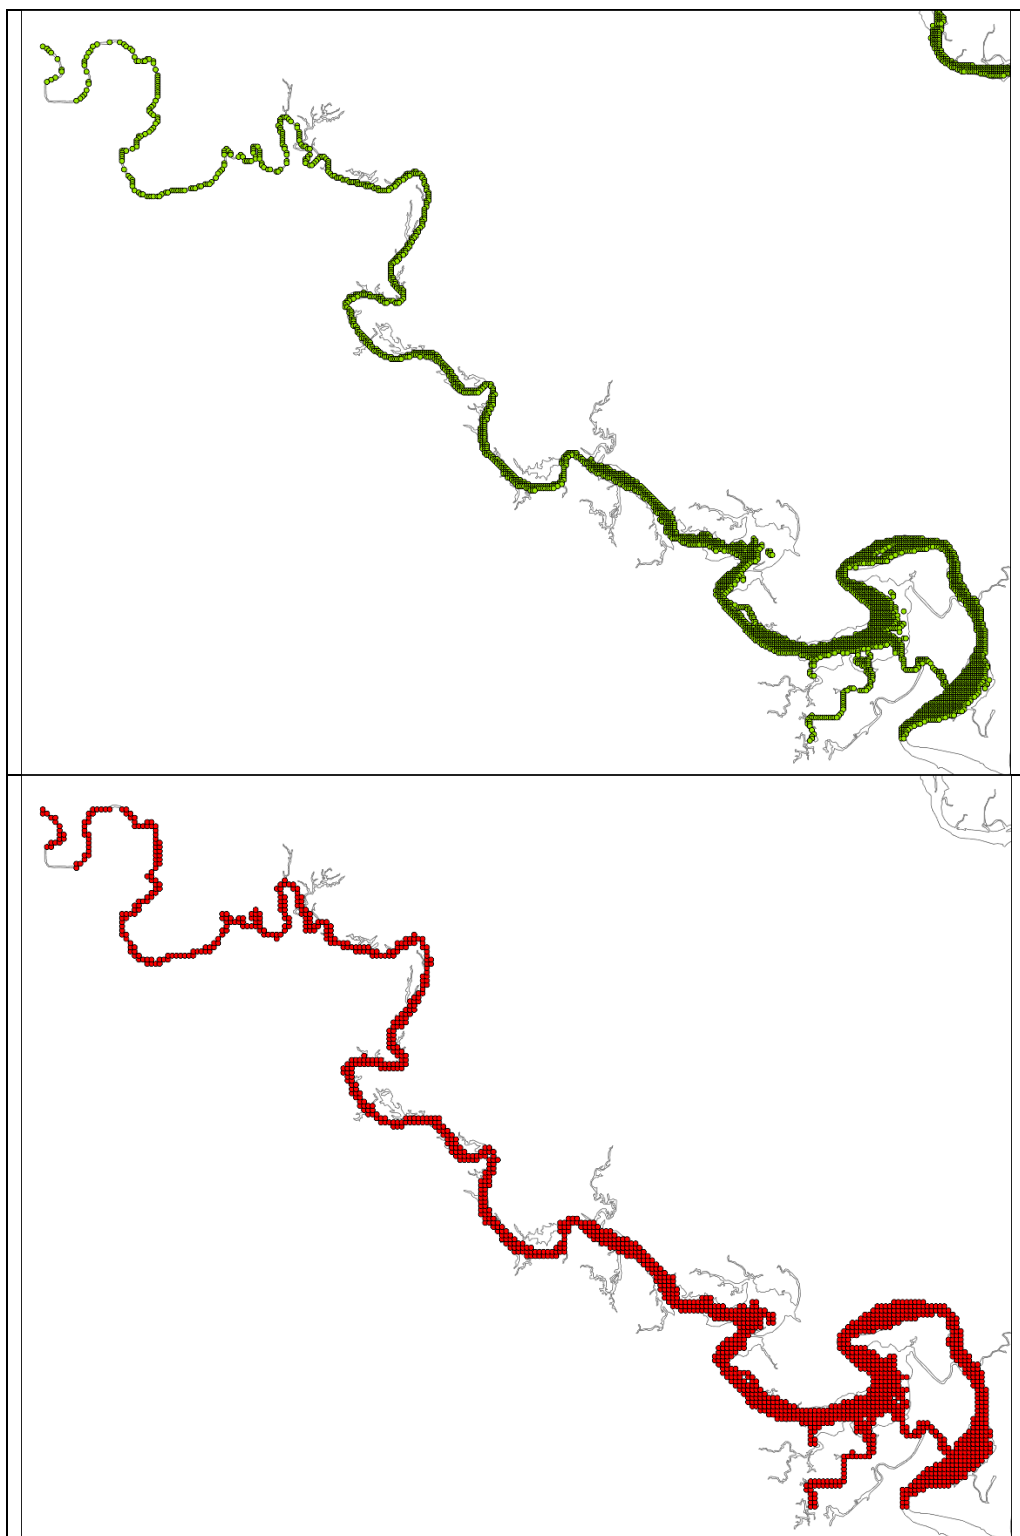


Figure 7a-b: VA Upper Pamunkey River segment (PMKTF) with 50m resolution (top) and 100m resolution (bottom).

Impact of grid thinning: DO analysis

This work is underway to compare interpolation results computed for several of the segments. This document is being shared before these results are completed to provide background. We will update here in the next version.

Summary

An adjustment to the current interpolator grid in five segments is being proposed. Note this is not an adjustment to the boundaries of the segments, but just the interpolation grid resolution that has currently been used. We will update this summary on the impact of these changes on the DO interpolation results, although changes are expected to be minimal. These grid resolution edits would, however, have a large impact on a user's feasibility of running the 4-D tool in terms of computing power needed and run time.

Any questions or suggestions are welcome as we determine the feasibility and impact of these adjustments.