




Land Use Effects on PCB Contamination in Stormwater Systems

The Toxic Contaminants Workgroup - April 8, 2026



Birthe V. Kjellerup (bvk@umd.edu)
Department of Civil & Environmental Engineering
University of Maryland, College Park


Acknowledgements



Janis Markusic Douglas Griffith
Anne Arundel County Bureau of
Watershed Protection & Restoration



Elizabeth Sklaire Suyue Cao

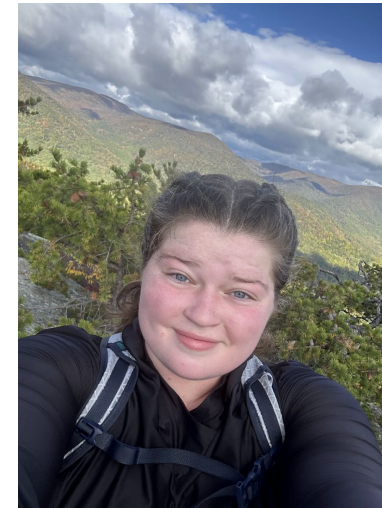

Catherine Elliott





Allen P. Davis



Legacy contamination or current sources?

Kaya et al (2019), STOTEN

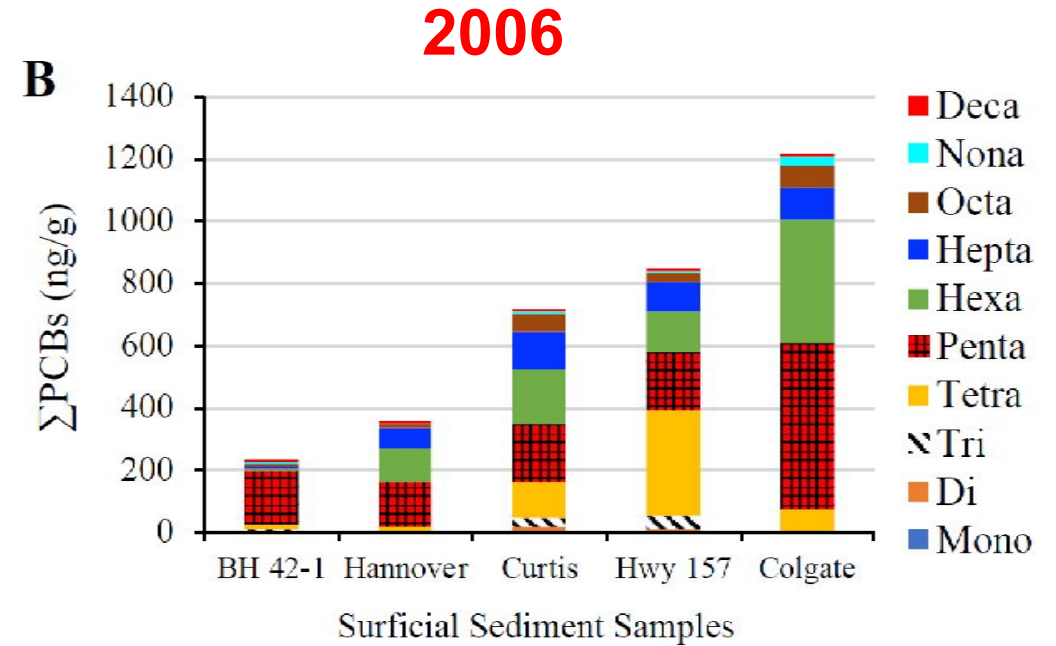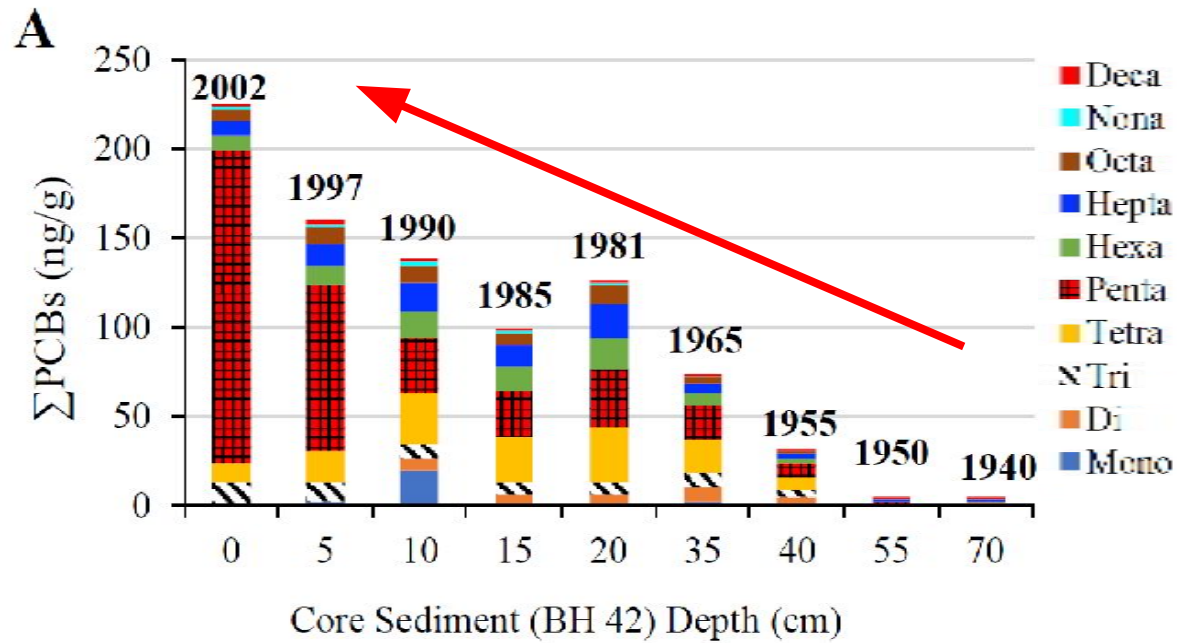


Conclusion:

Not only legacy PCBs (Example of Baltimore Harbor)

⇒ **Current sources** are increasing the contamination level

⇒ **TMDLs in place** for watersheds in the Chesapeake Bay

PCB TMDLs in Maryland

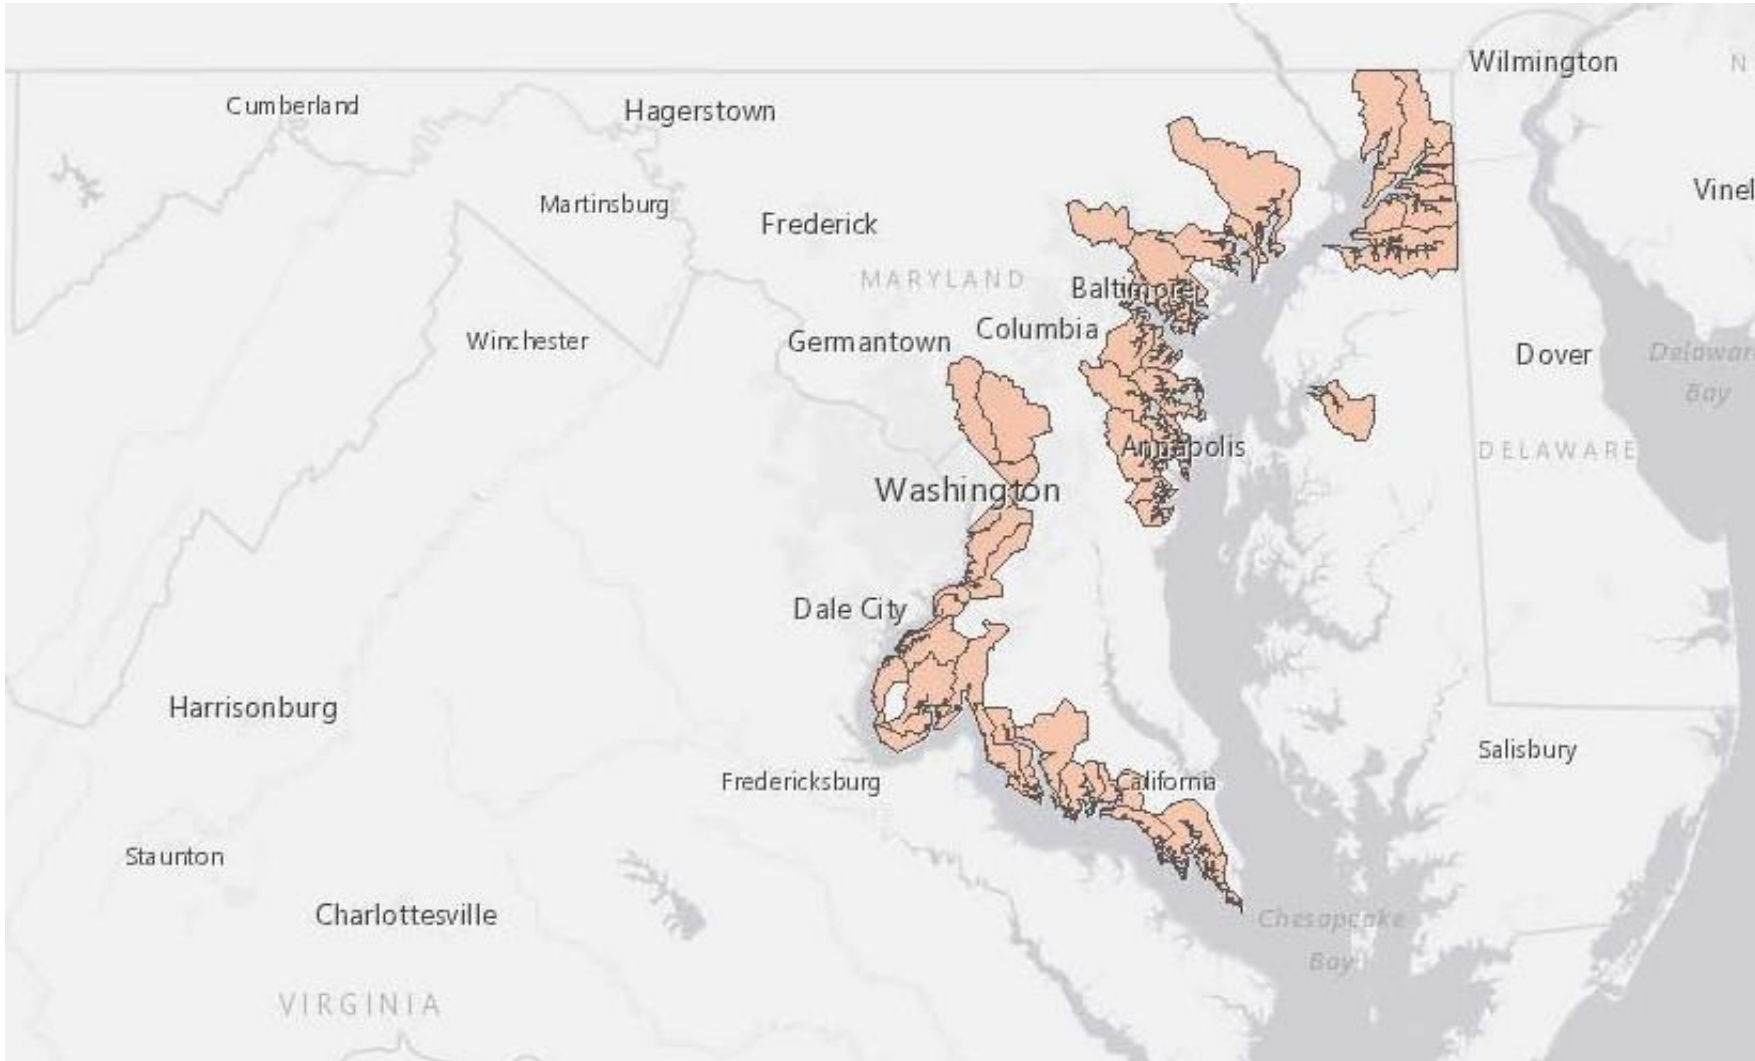

Impact of land development on PCB contamination

- Land-use categories

- Residential
- Commercial
- Institutions
- Industrial areas (light vs heavy)
- Energy sites
- Green spaces



- Land development era



Objectives

- Assess the **land use** and **time of development** impact on the presence of PCBs in soils and stormwater sediments
- Identify the **potential sources** of stormwater PCBs
- Provide information and **guidance** on PCBs presence (and removal) in stormwater

Residential neighborhoods



Before 1970es



After 1970es

Light commercial areas



Before 1970es




After 1970es


Energy site



Sampling locations

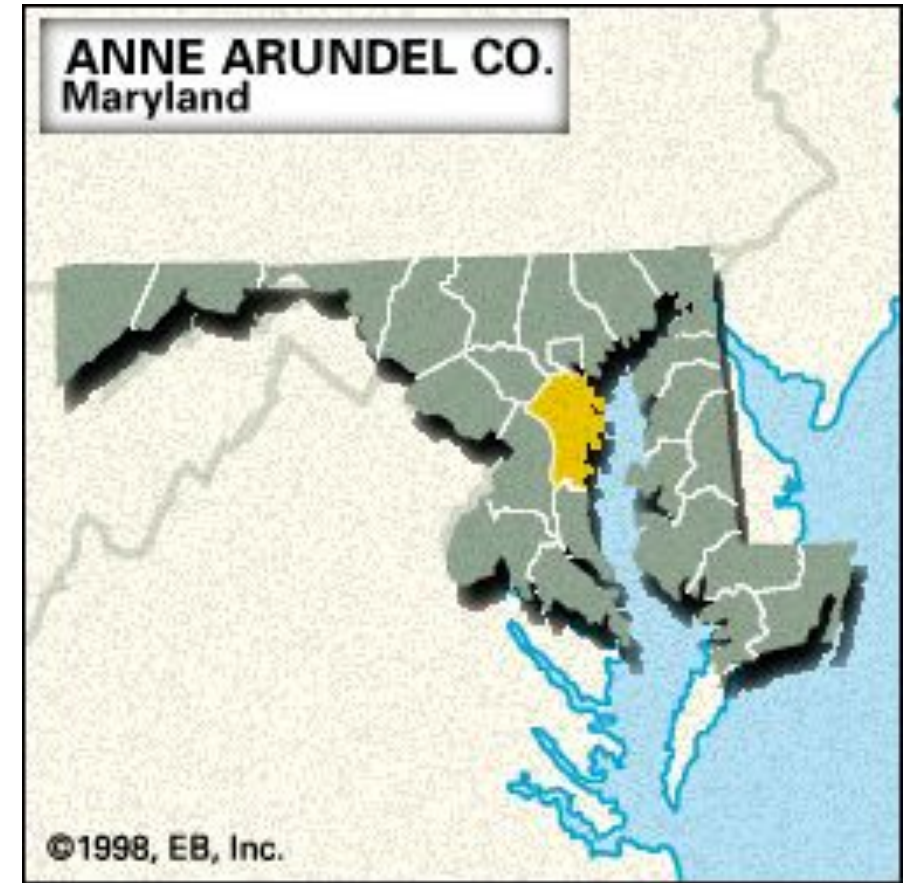


Map of the sampling sites

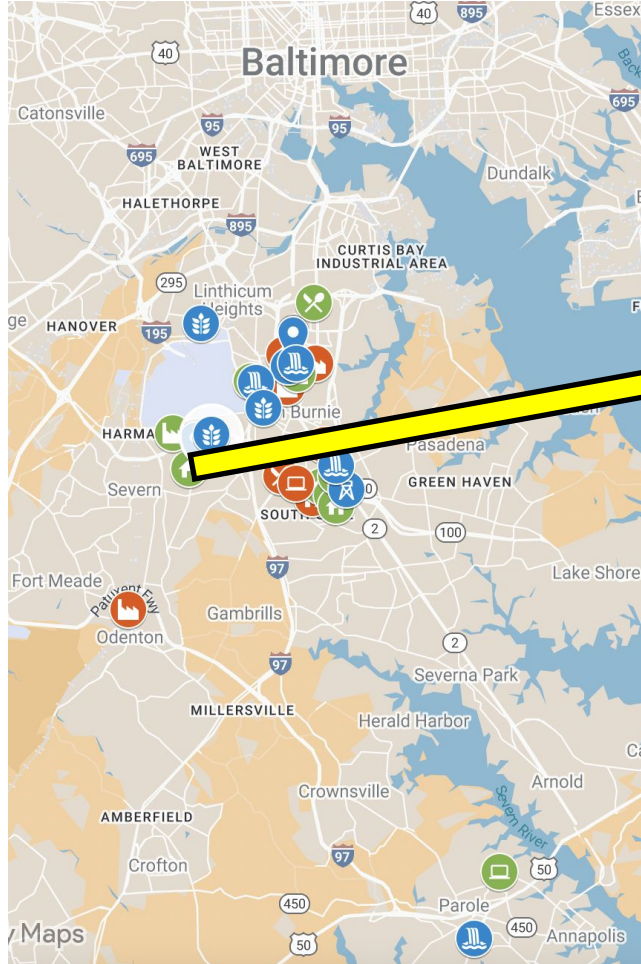

Abbreviation	Meaning
Res	Residential Area: Neighborhood
ID	Industry Area: Metal scrap yard, Automotive sales industry
Com	Commercial Area: Retail Shop
IN	Institutional area: Hospital
GS	Greenspace: Park
Pre70	Developed before 1970s (before PCB banned)
Po70	Developed after 1970s (after PCB banned)

Number of collected samples

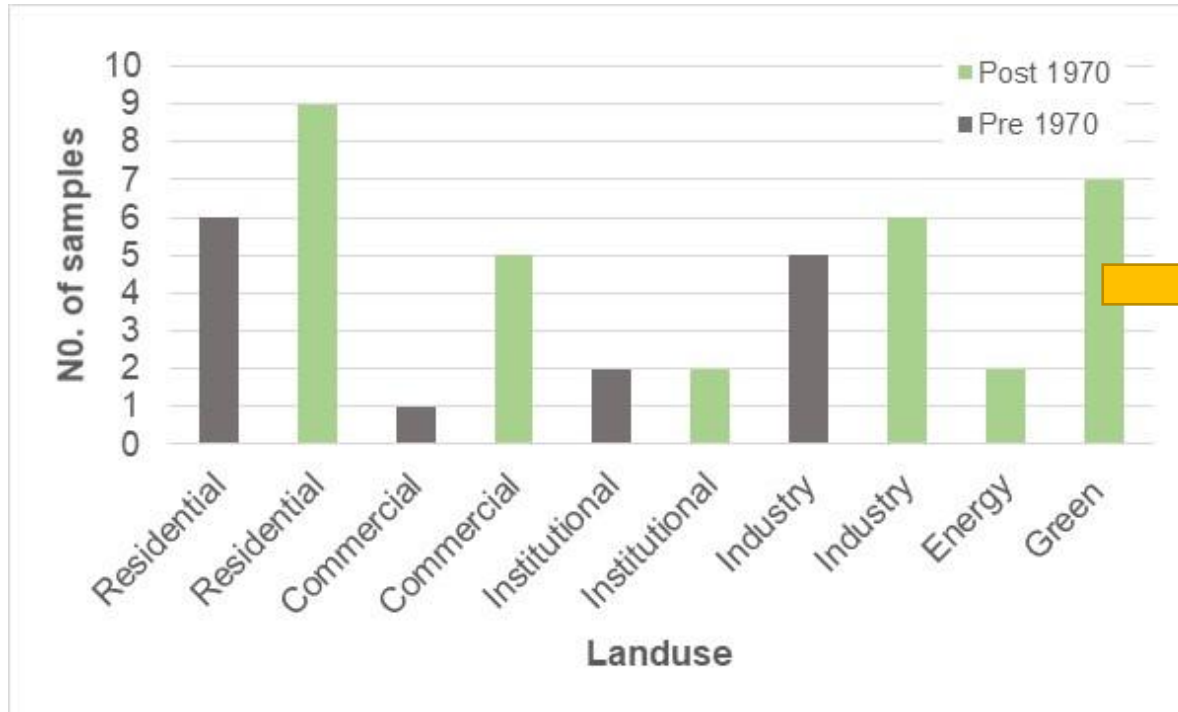


Greenspaces – 'control' areas

Summary:

- 45 samples were collected over 2 years
- 6 different land-uses
- 2 time eras
- Analyzed in triplicate

Landuse Type - Total PCB concentration

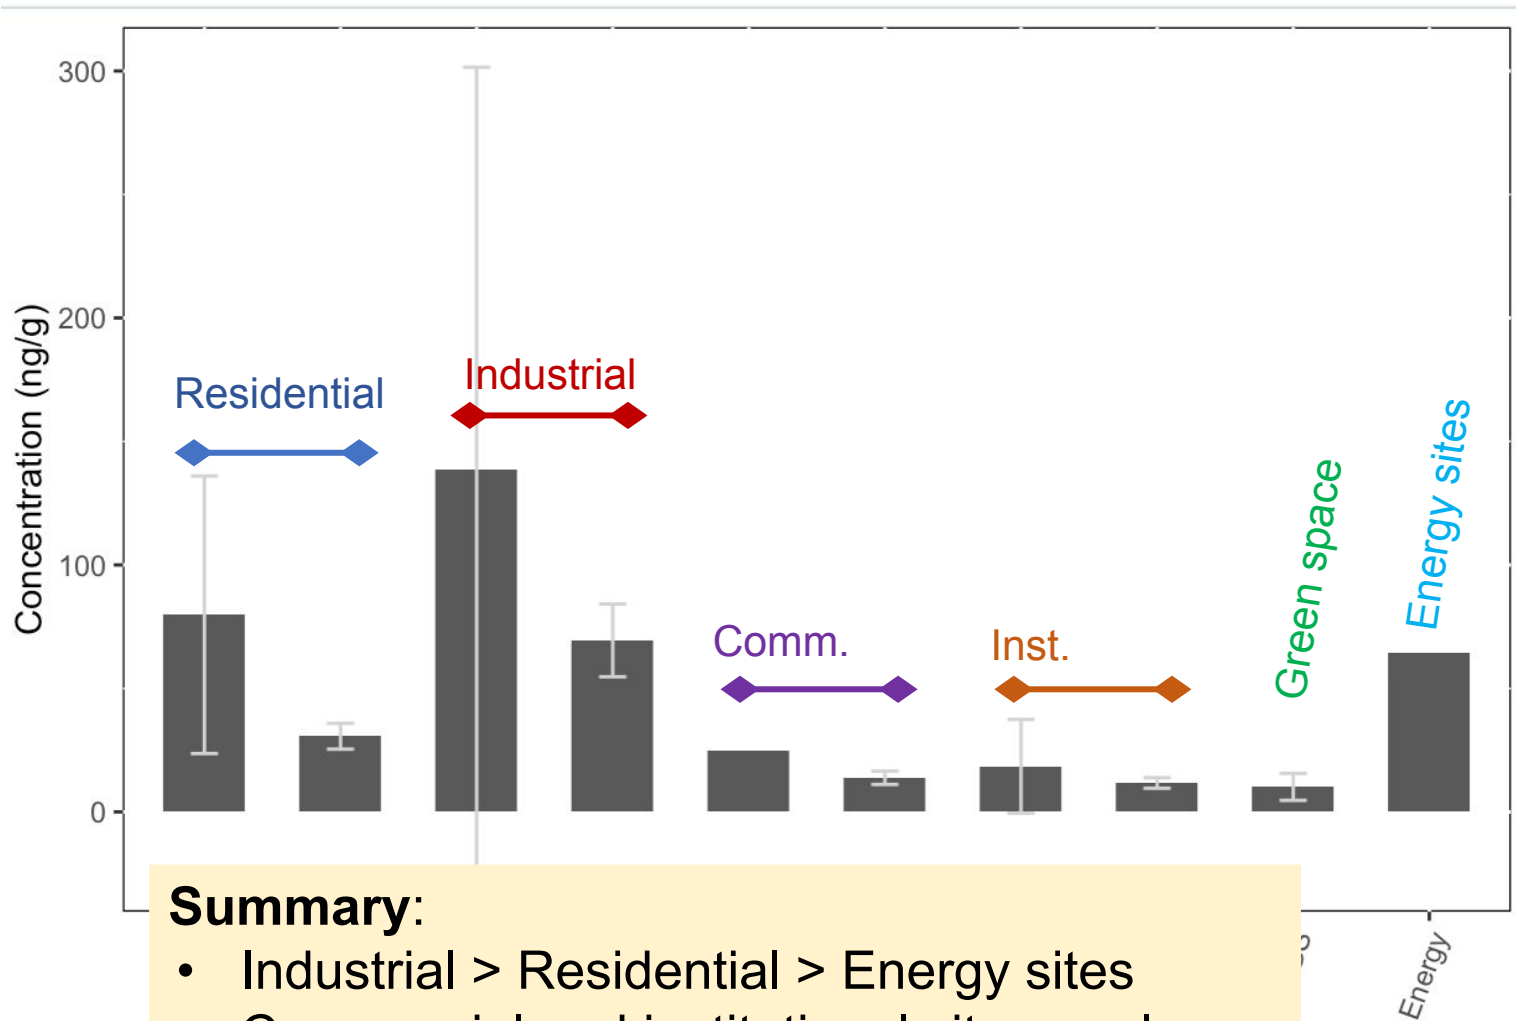


Category	Range (ng/g)	Average (ng/g)
Residential (Pre)	17.4-157	79.8
Residential (Post)	24.1-37.4	30.6
Industrial (Pre)	31.7-381.3	140
Industrial (Post)	59.0-79.8	69.4
Commercial (Pre)	24.9	24.9
Commercial (Post)	12.1-24.9	13.8
Institutional (Pre)	5.05-31.9	18.5
Institutional (Post)	10.2-12.3	11.7
Green Space	1.27-13.0	10.1
Energy sites	64.4	64.4


Summary:

- Industrial > Residential > Energy sites
- Commercial and institutional sites are lower
- Green spaces are the lowest of all
- Large range of concentrations

Effect of Land Use

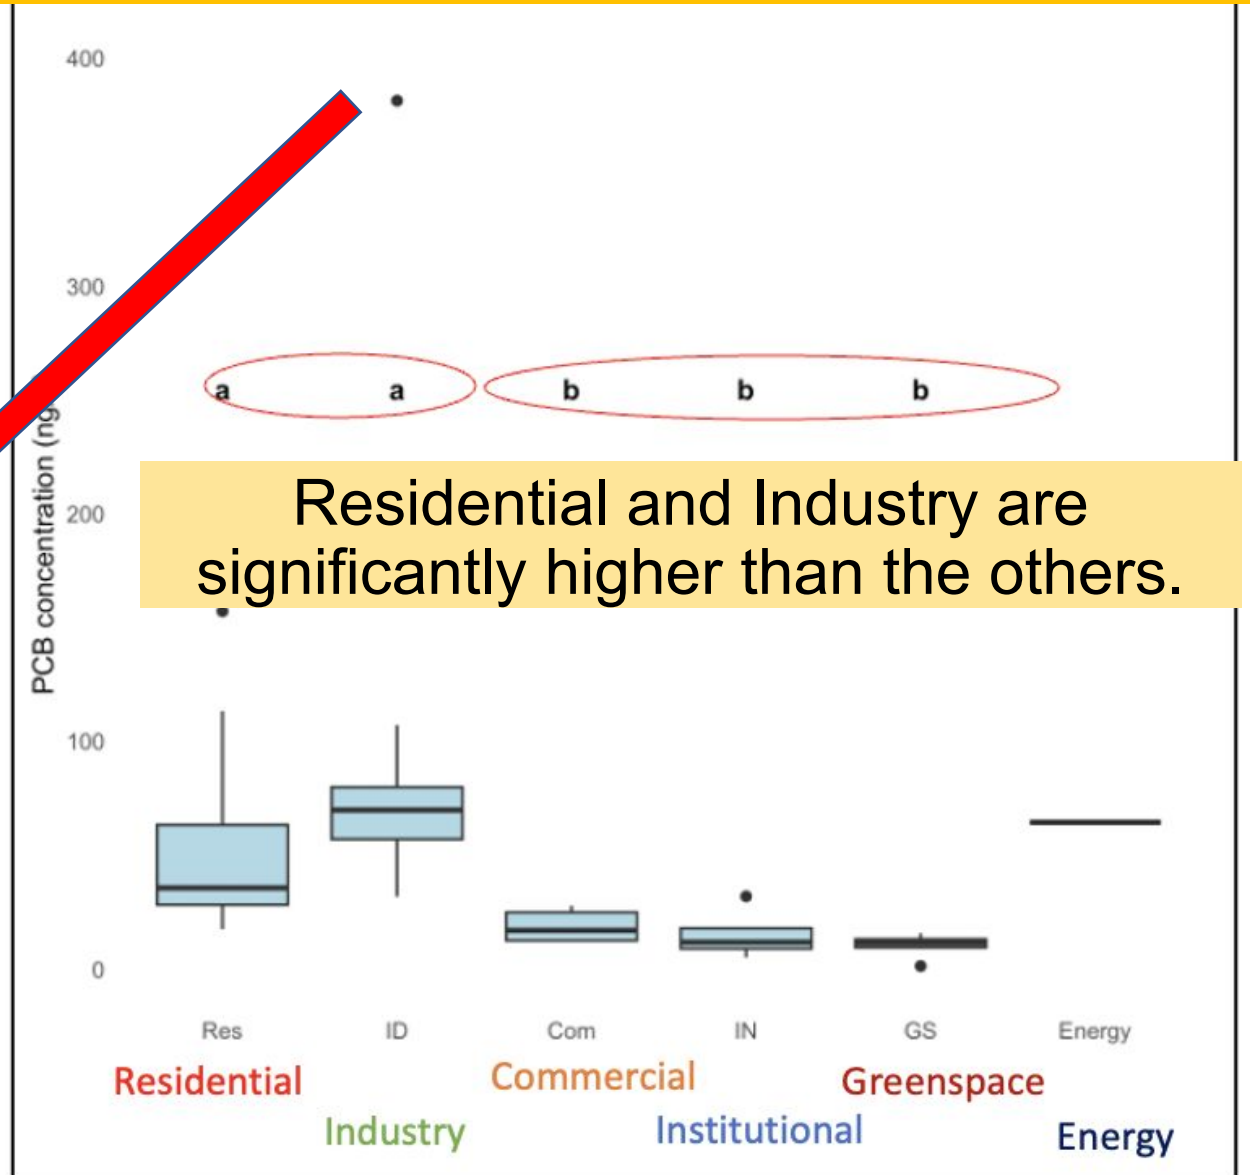

Development time - Total PCB concentration

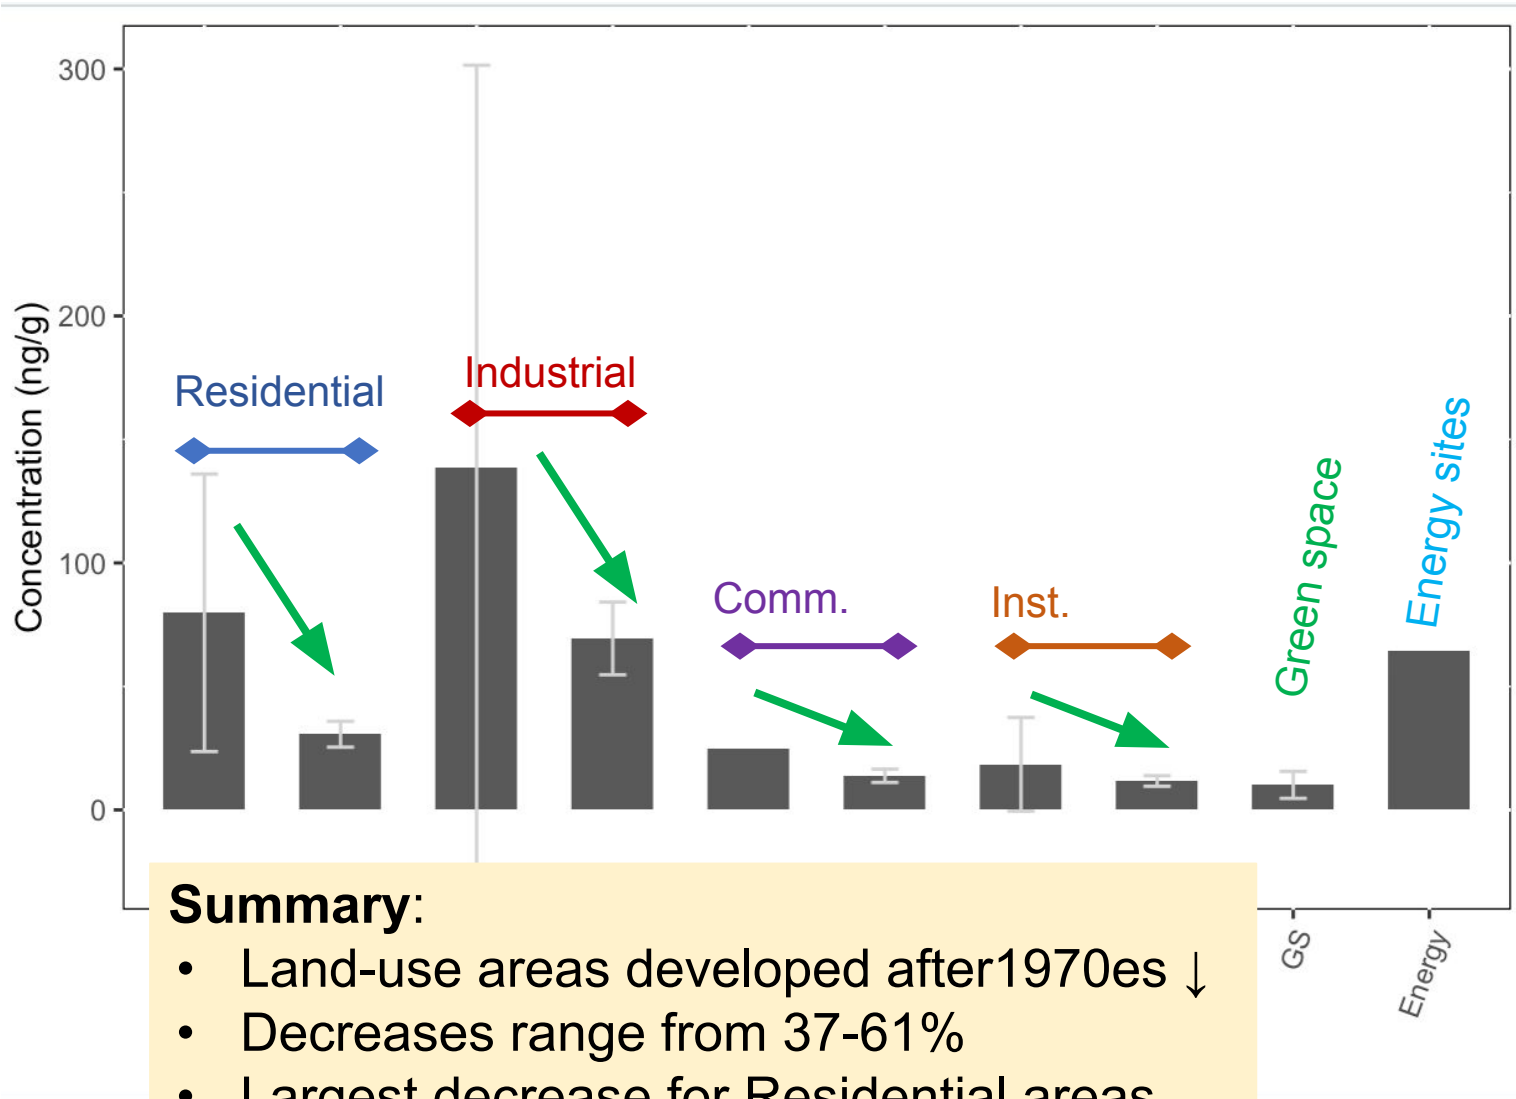


Category	Average (ng/g)	Reduction
Residential (Pre)	79.8	61%
Residential (Post)	30.6	
Industrial (Pre)	140	50%
Industrial (Post)	69.4	
Commercial (Pre)	24.9	44%
Commercial (Post)	13.8	
Institutional (Pre)	18.5	37%
Institutional (Post)	11.7	
Green Space	10.1	-----
Energy sites	64.4	-----

Summary:


- Land-use areas developed after 1970es ↓
- Decreases range from 37-61%
- Largest decrease for Residential areas
- Difficult to determine re-development time

Known sources of PCBs

- Industrial products: Aroclors, A1242, A1248, A1254, A1260
 - ❖ Last two digits indicate chlorine % by weight
 - ❖ EX: Aroclor 1254 contains approximately 54% chlorine
 - ❖ Found in: Electrical transformers, capacitors, heat transfer fluids
- Building materials (recycled material)
 - ❖ Found in: Sealants, caulks, paints
- Other products
- Road paints

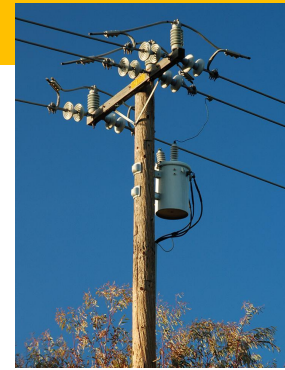

PCB sources – landuse category


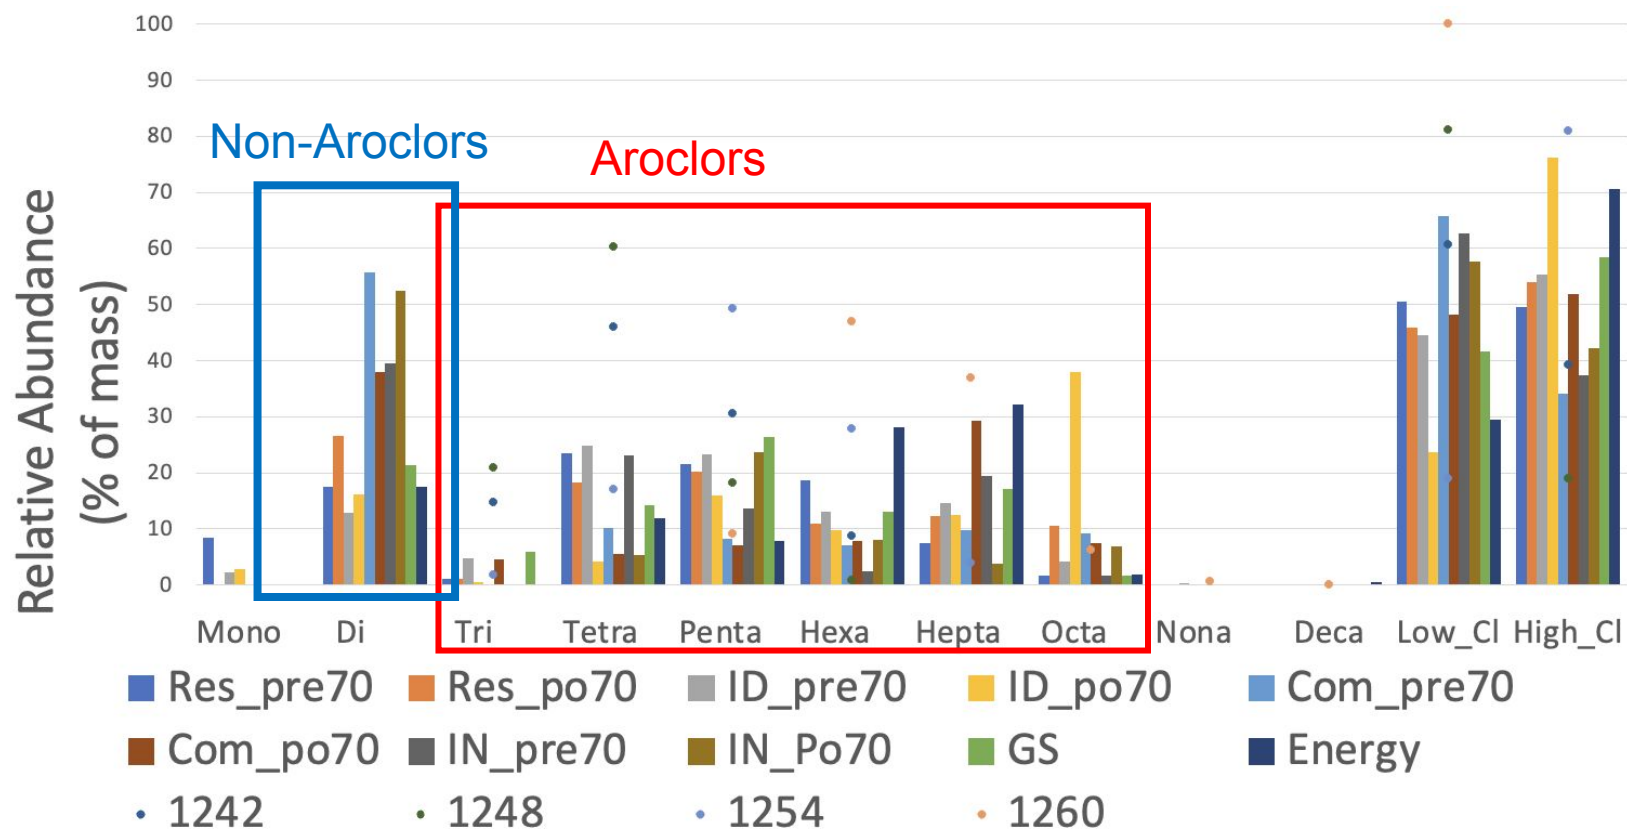


Summary:

- Samples are not originating from Aroclors (dots are not matching samples)
- Large presence of di-chlorinated PCB homologs
- Other sources for PCBs should be considered

Earlier study of yellow road paint


PCB 11 in yellow road paints

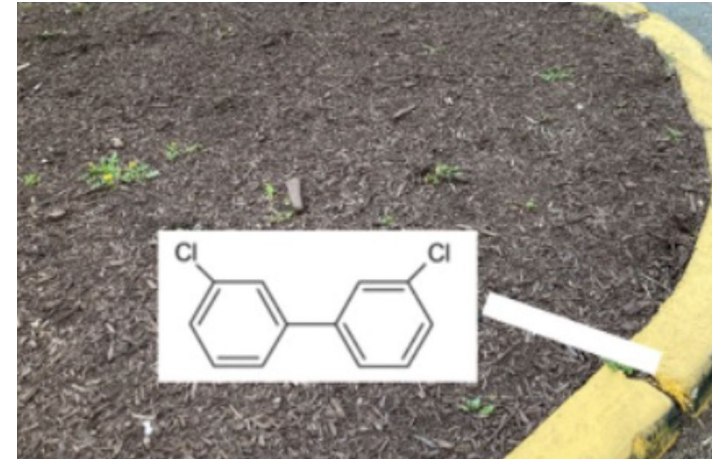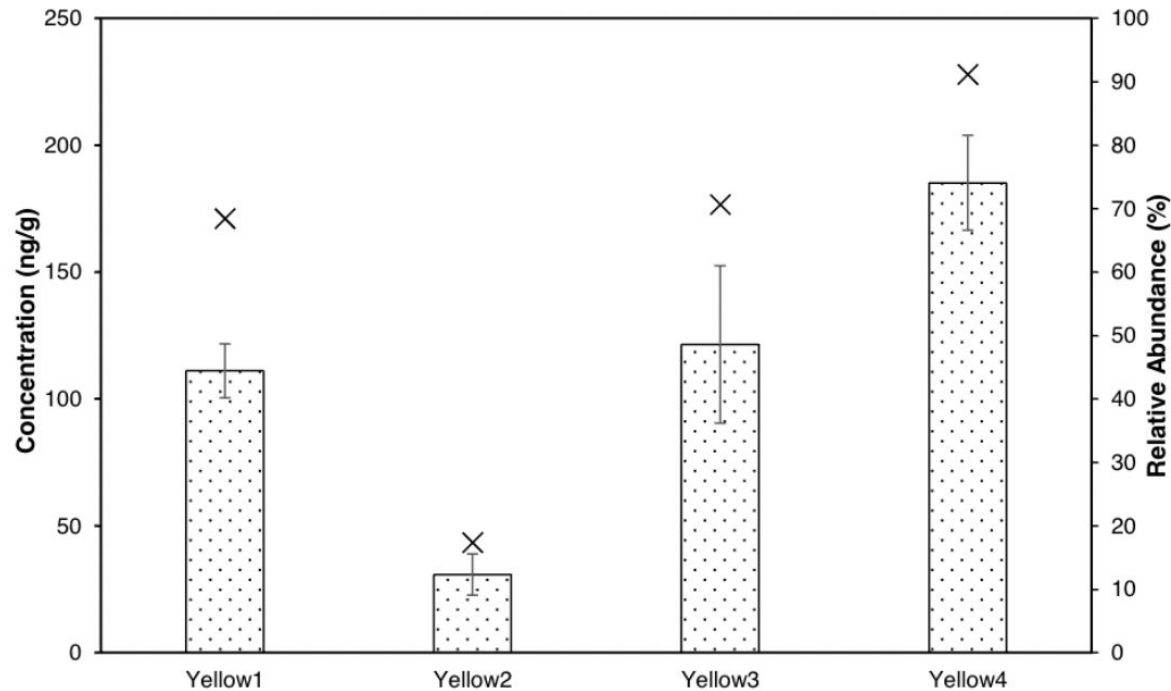

- The relative abundance of PCB 11 ranged from 17% to 91% of total PCB concentrations in yellow roadway paints
- Road paint flake exist in the soil/sediment sample might impact the concentration of samples.

PCB-11 in the collected samples (this study)

PCB-11 Concentration and relative abundance (% of total PCB mass)

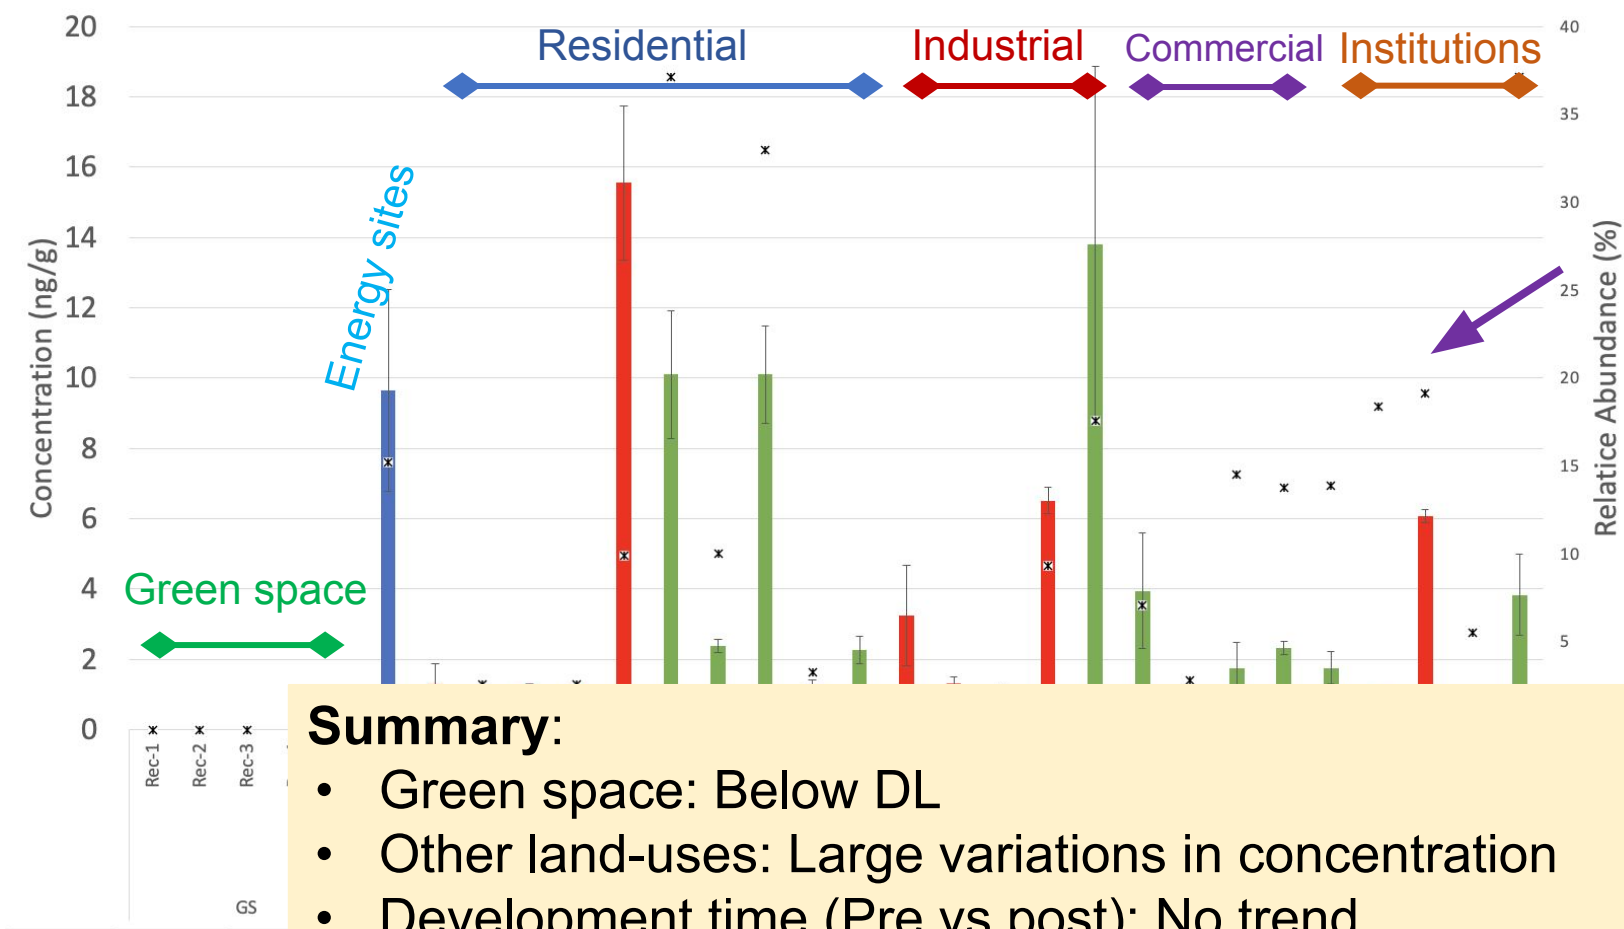

PCB-11 is non-Aroclor

Summary:

- Green space: Below DL
- Other land-uses: Large variations in concentration
- Development time (Pre vs post): No trend
- Total PCB mass: Ranges from 0-36%
- Removal of road yellow road paints can reduce the PCB-11 level

Road paint calculator (Capstone Project)

Estimate the area of road paint in a watershed:



PCB Calculator

Length of Roadway

Parking Lot Area (ft²)

Make More Specific Calculation

Number of Stop Bars

Number of Crosswalks




Color	White	Yellow
Length (ft)	184120.91	34486.91
Total Polylines	9426	298
+/- Error	6880.98	217.54
Area (sqft)	85260.68	28477.47
Volume (Cubic ft)	106.57585	35.5968375

Summary of College Park Drafting Data

Road paint calculator (Capstone Project)

PCB Concentration	Low (g/ft ³)	High (g/ft ³)	Average (g/ft ³)
Yellow	0.0000727	0.001771	0.0011730
White	0.0000514	0.000074	0.0000584

PCB Calculator Concentrations

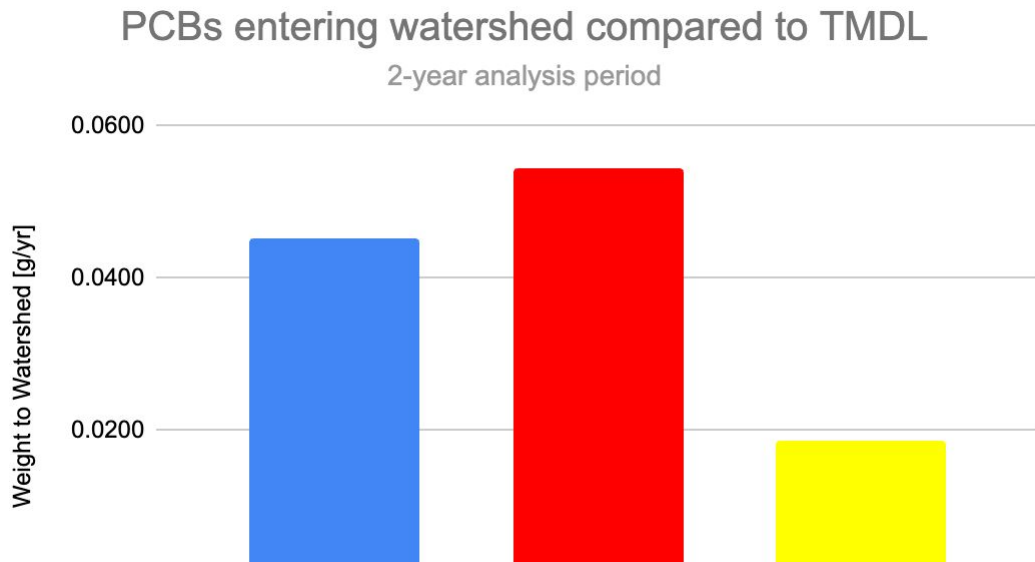

Summary:

- Estimate road paint areas (each color)
- Determine PCB concentration in paints
- Mass of PCBs from road paint in a watershed



PCB Runoff Calculator

Estimate paint volume and annual PCB leaching for roadways and parking lots

Roadway Length (ft)
Enter length in feet

Parking Lot Area (ft²)
Enter area in square feet

Advanced Calculation

Number of Stop Bars
Enter quantity

Number of Crosswalks
Enter quantity

Calculate **Reset**


Enter values and click Calculate to see results



PCB Calculator User Interface


Current sources and receptors of PCBs

PCBs: ~~An environmental Legacy~~

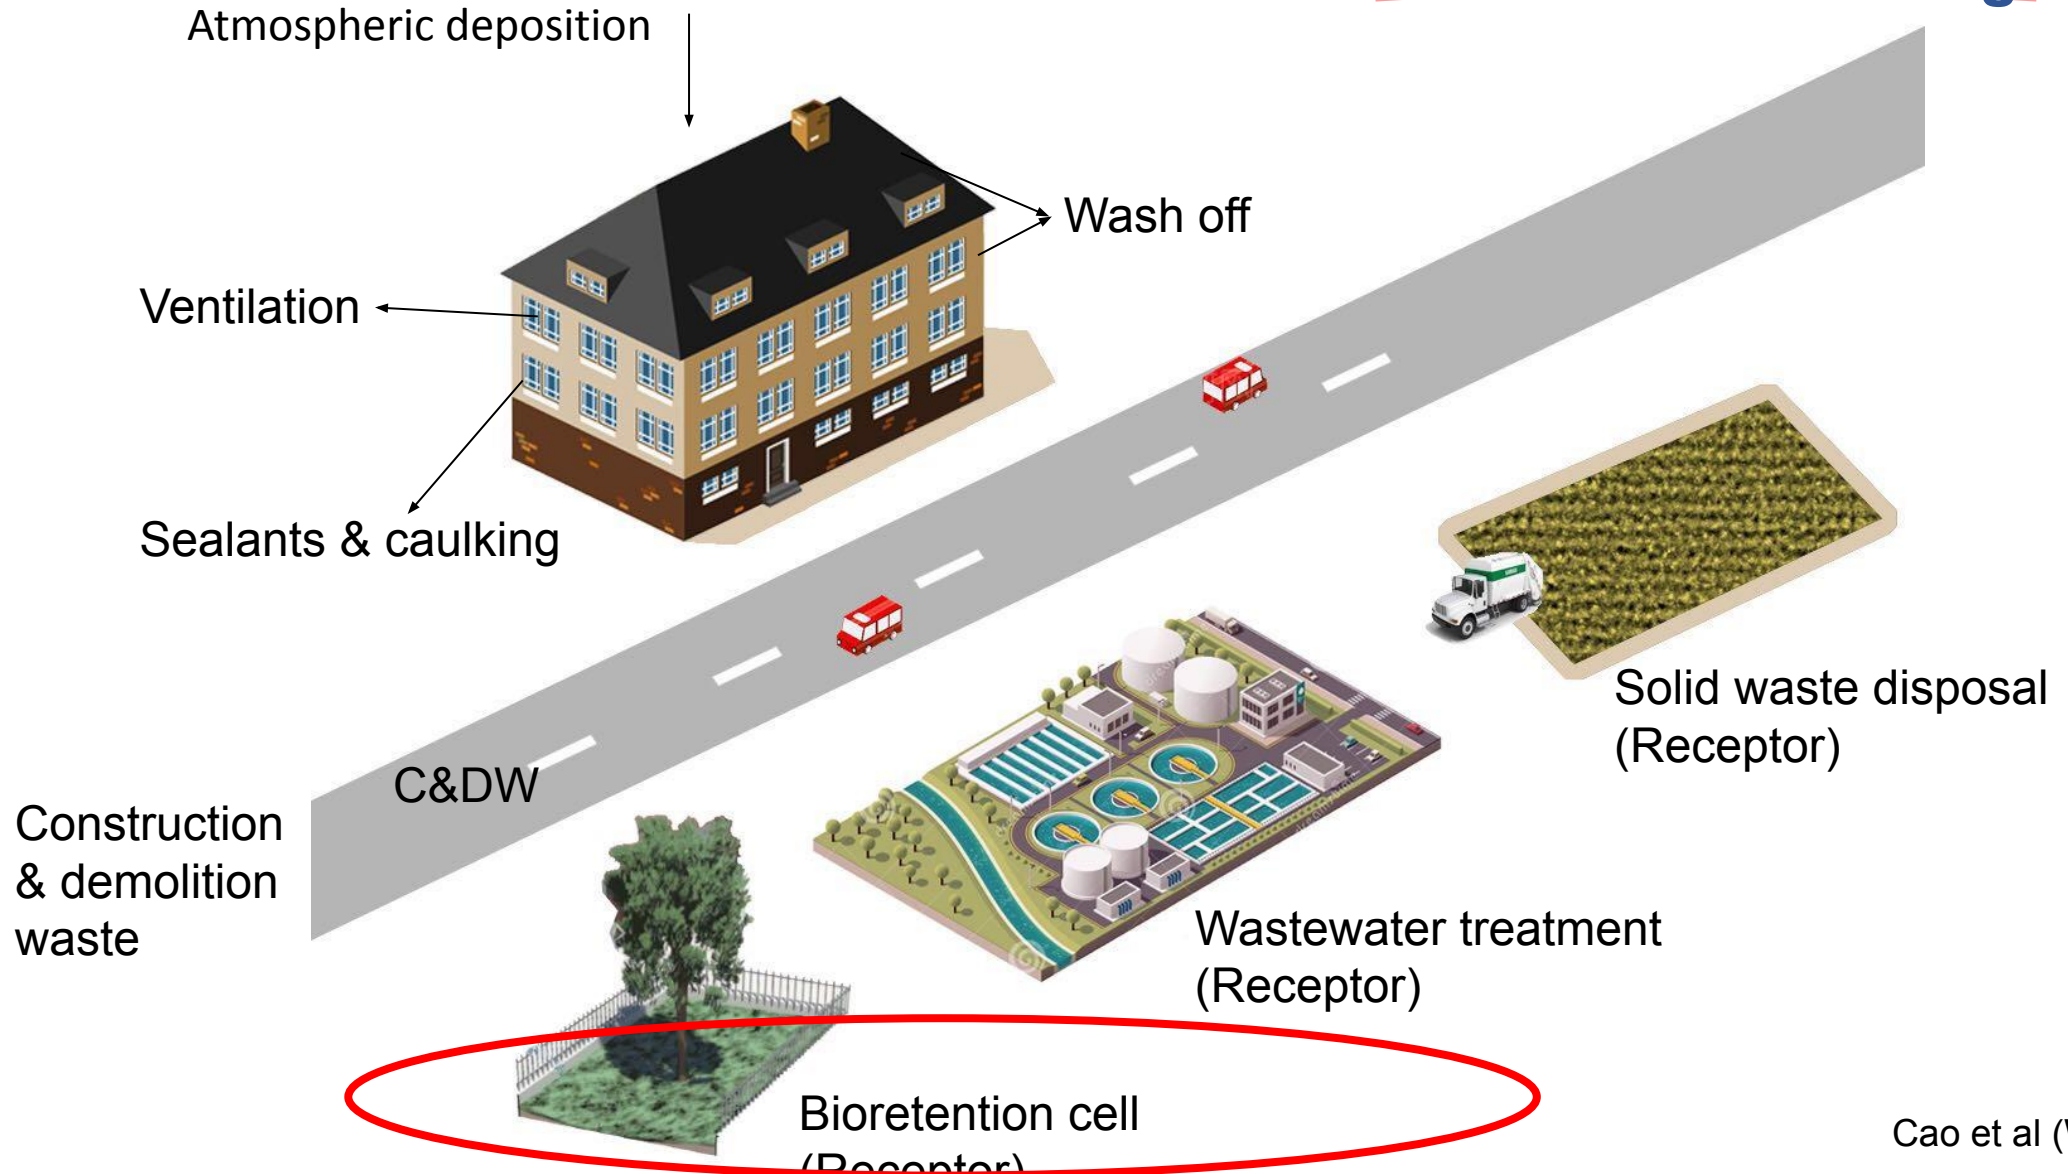


Stormwater treatment options


Sediment trap

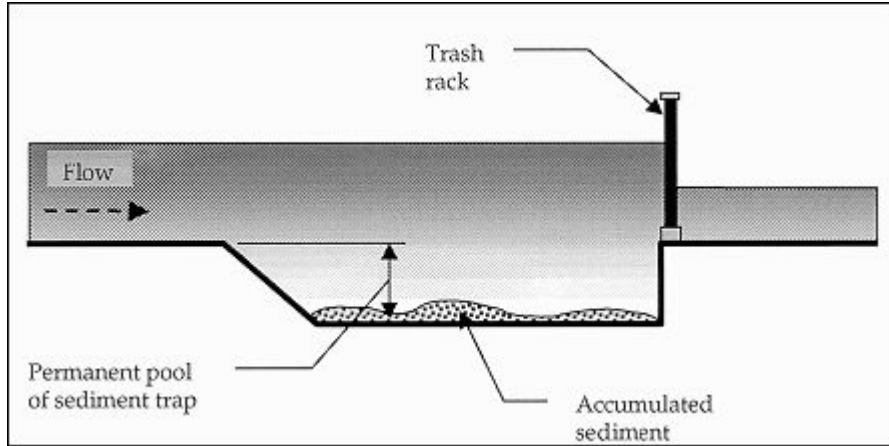


Swales

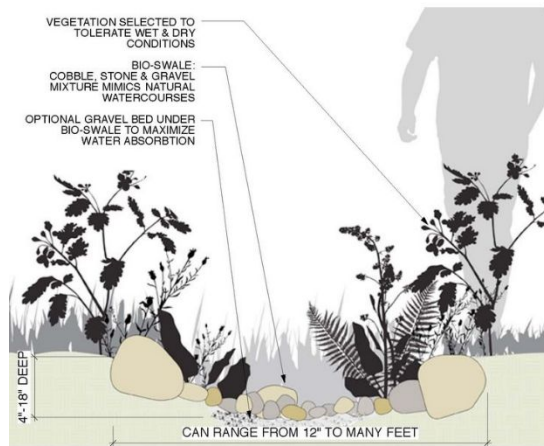


Bioretention cells

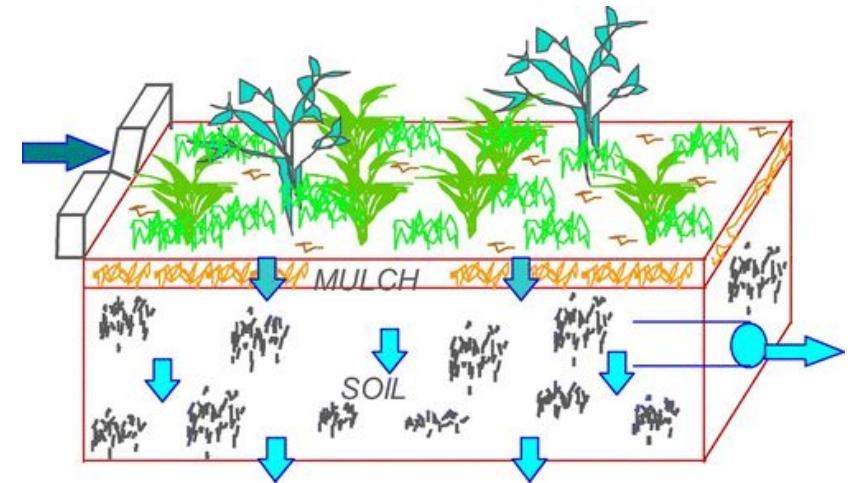

The Microbial Fate of PCBs in soil biofilm

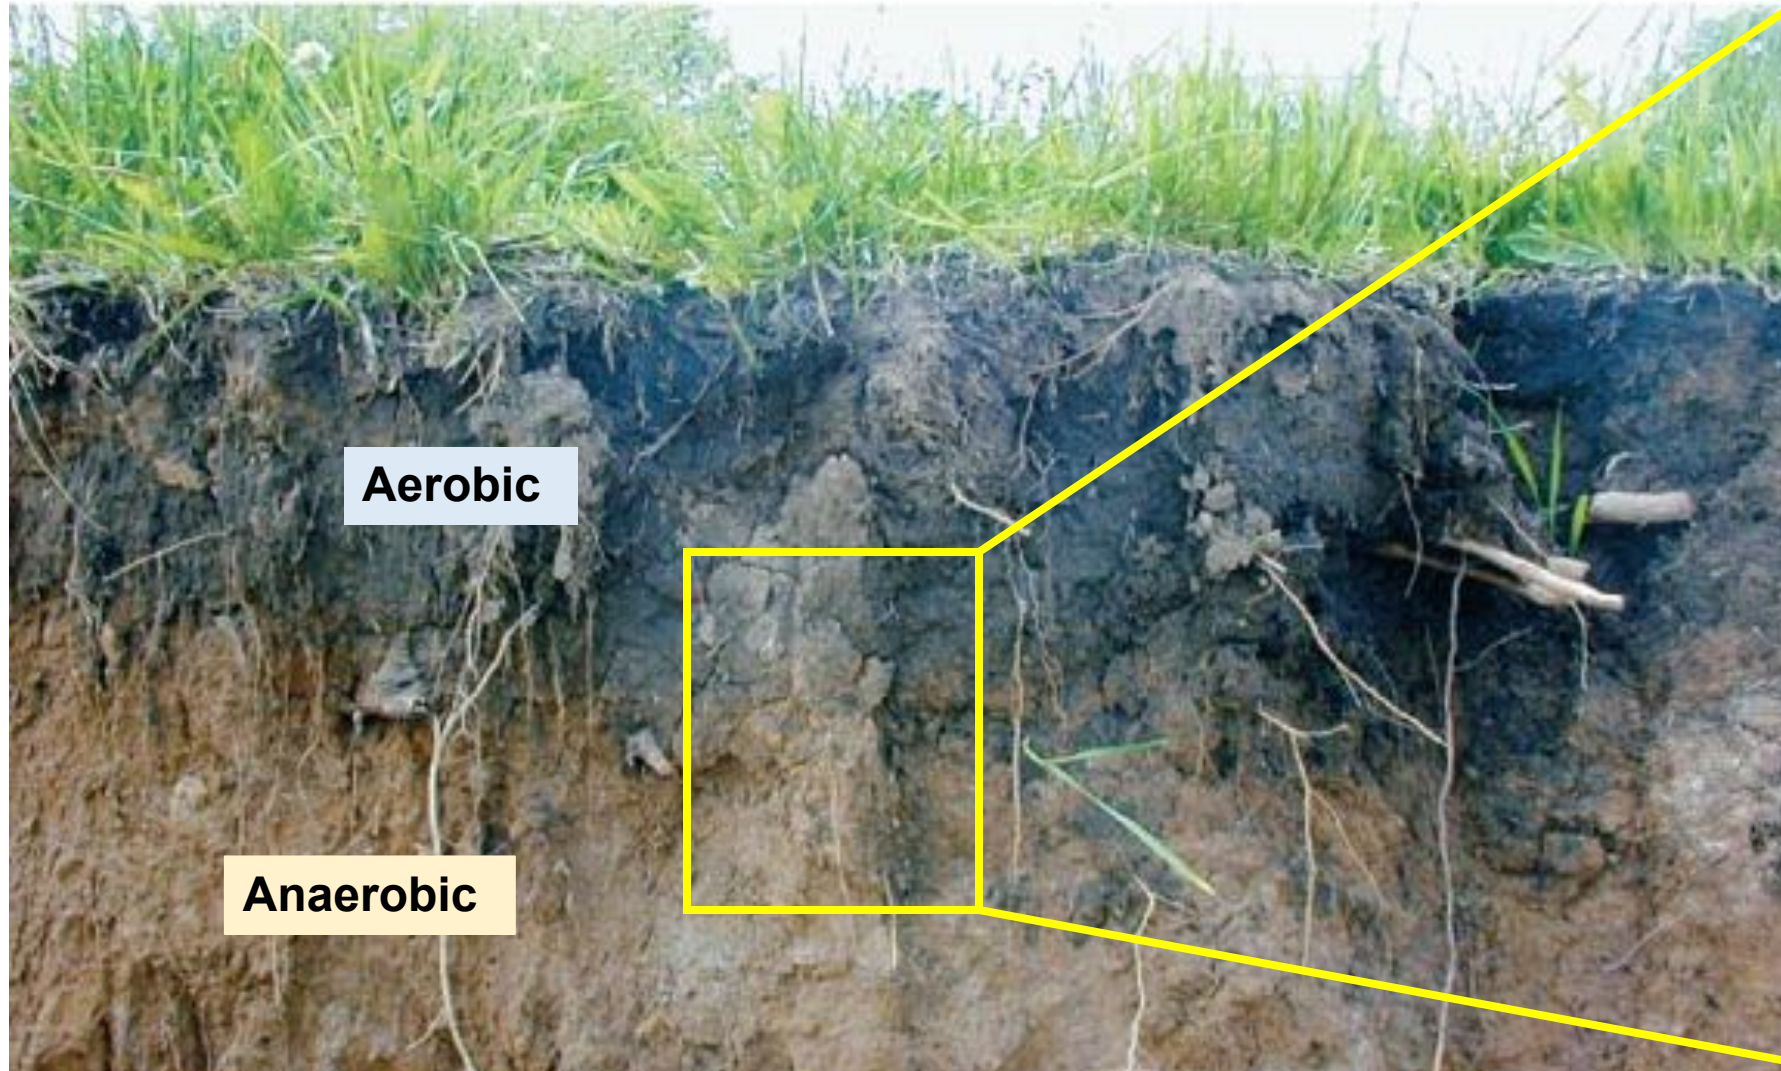


The Microbial Fate of PCBs in soil


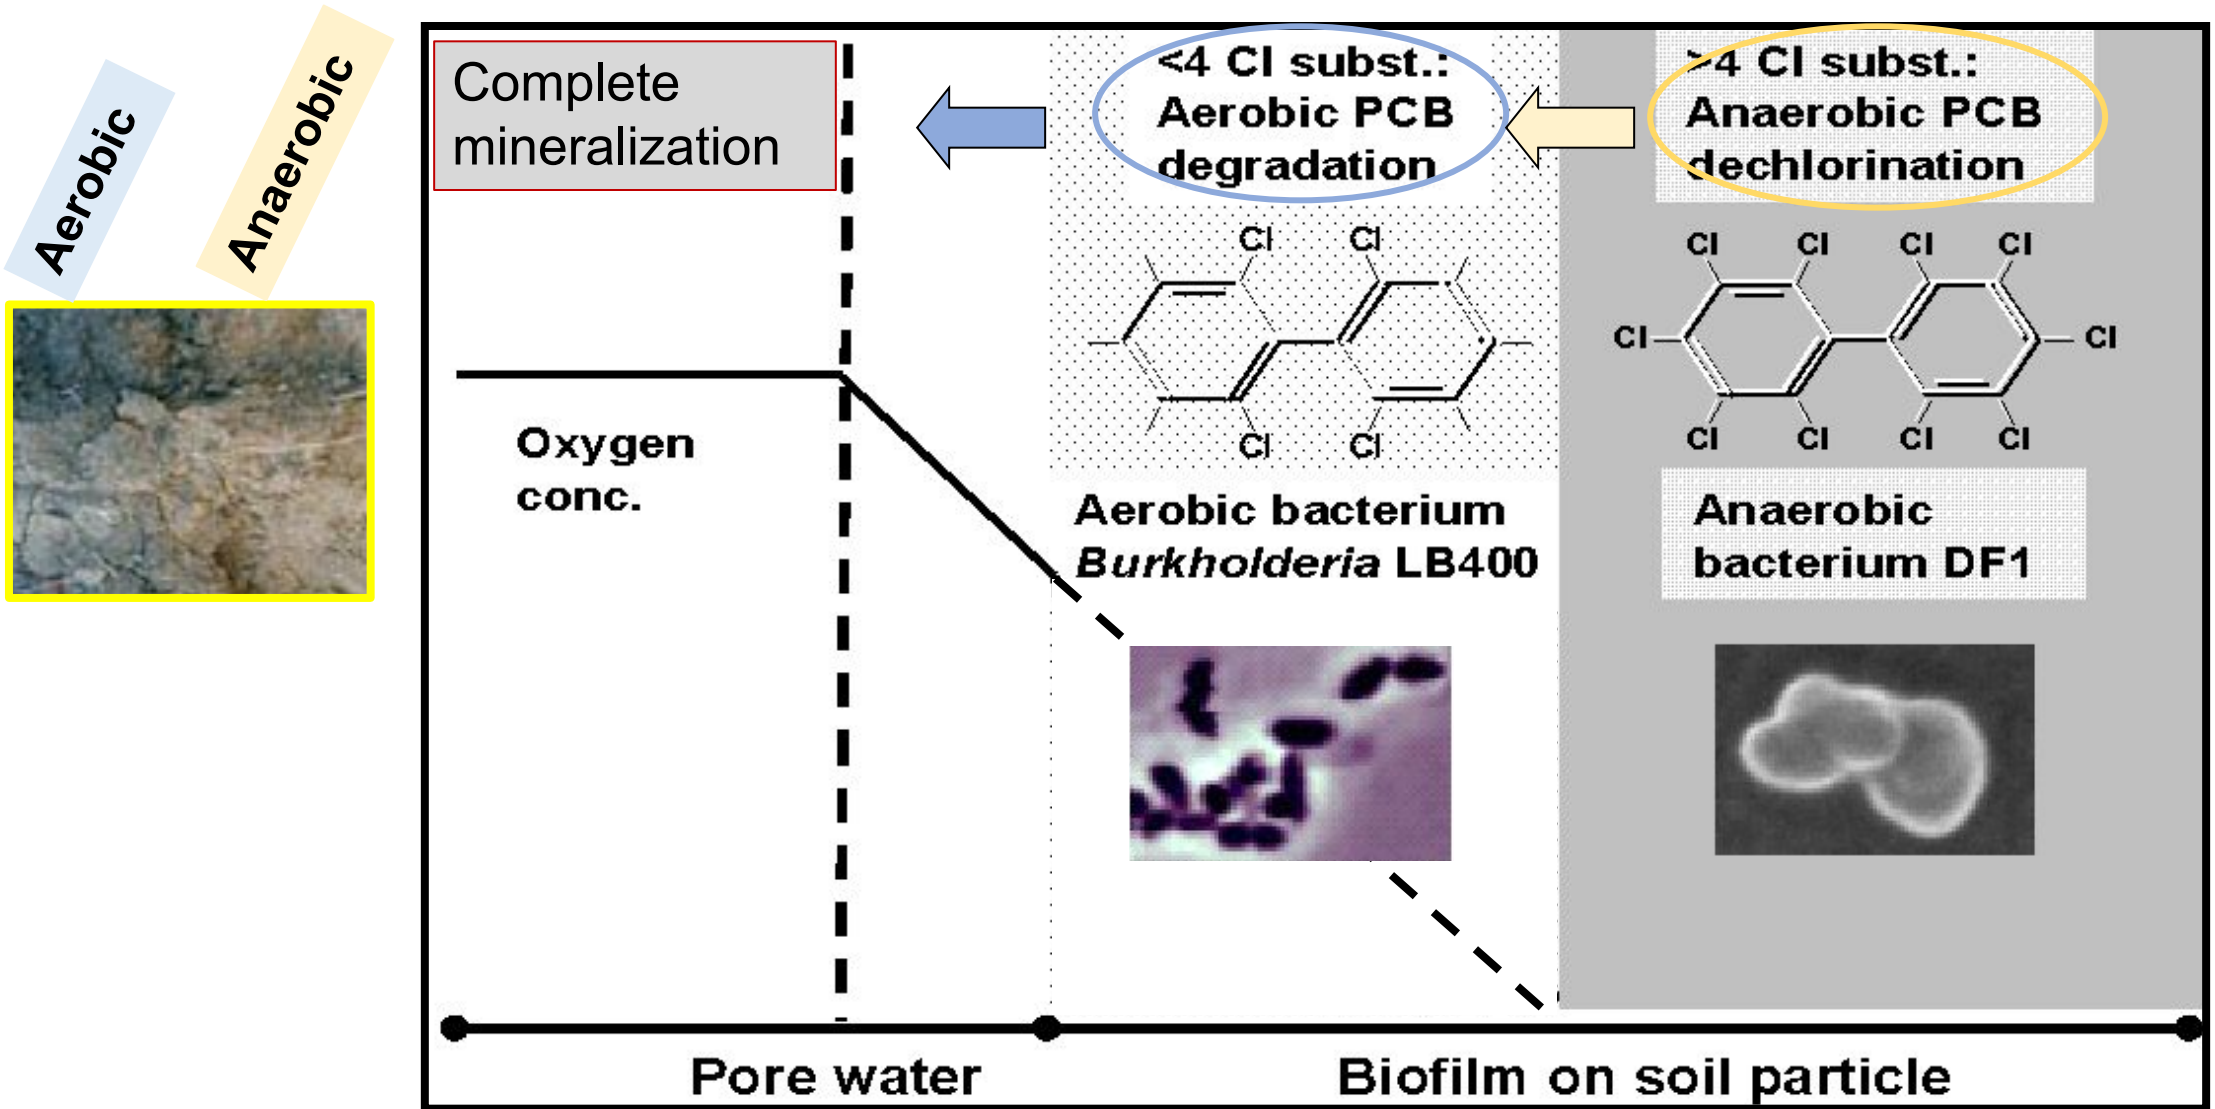


Signs of PCB biodegradation?

No. of chlorines per biphenyl at each site

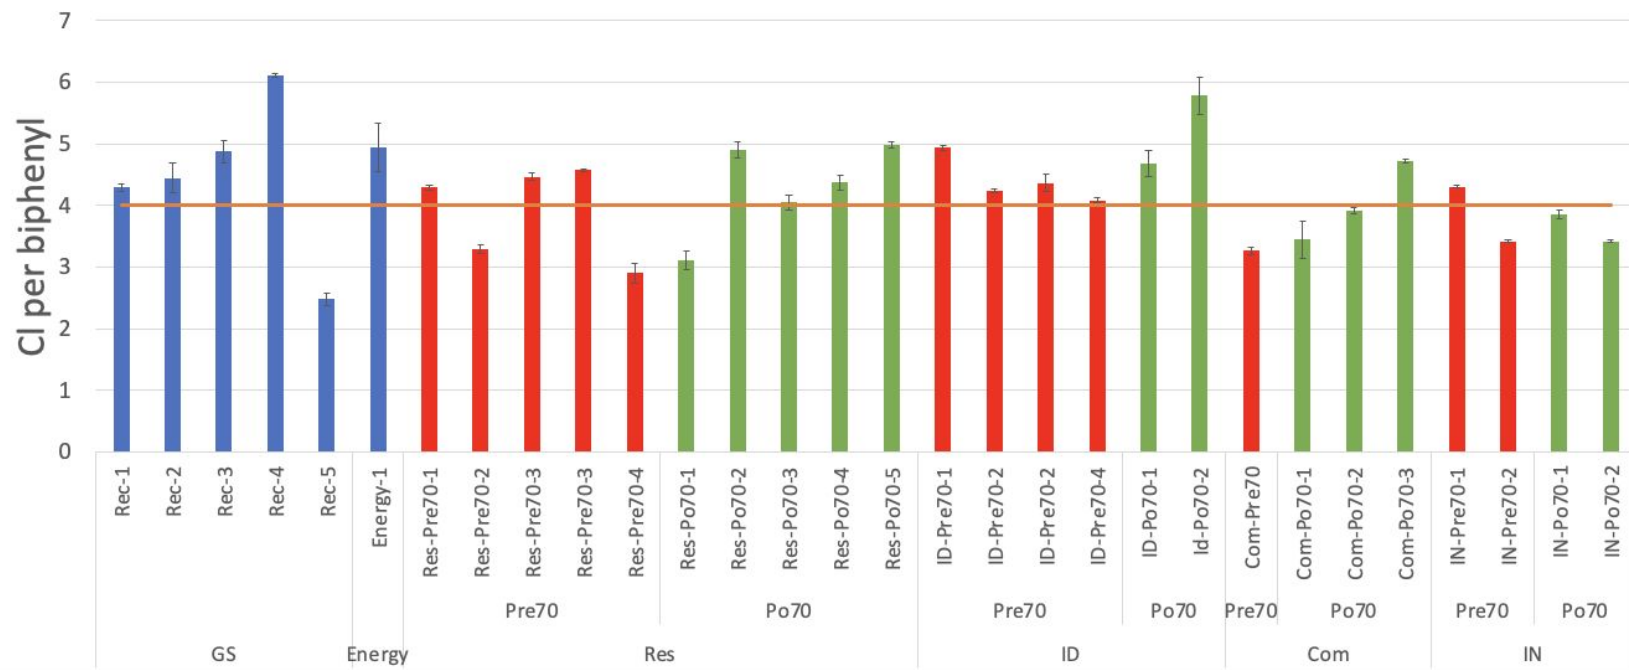

Anaerobic conditions required




Aerobic conditions required

Summary:

- 66% of samples have >4 chlorines – anaerobic conditions are required
- 33% of samples have <4 chlorines – aerobic conditions are required
- Mass from samples <4 chlorines can be removed ‘easily’

Stormwater Treatment Train System

Results from completed SERDP-DOD project:

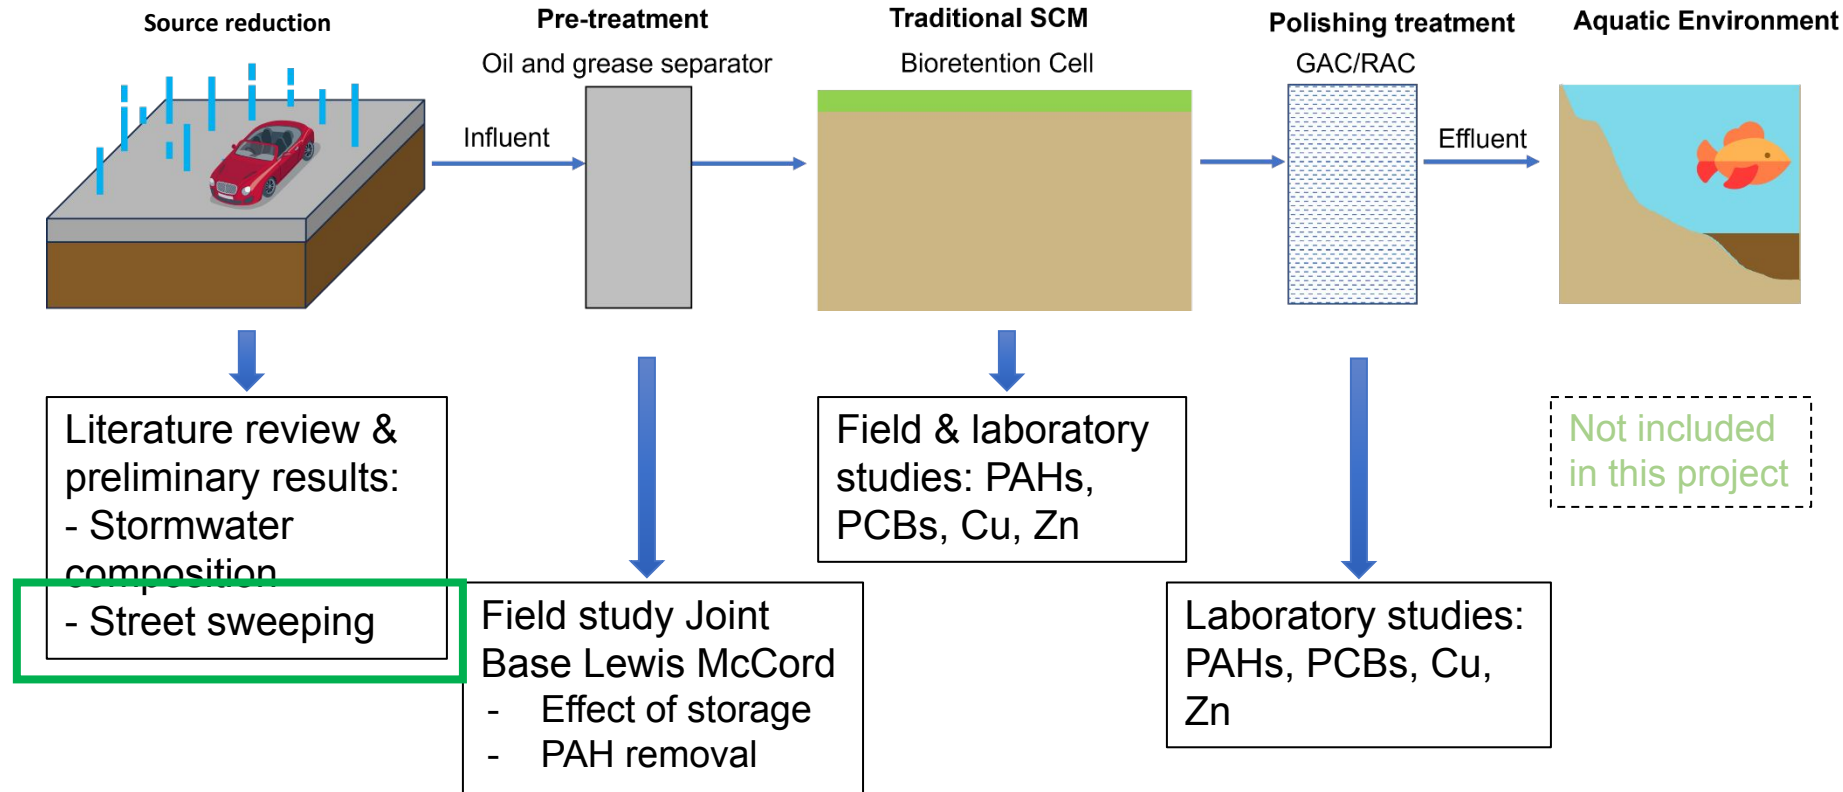

Outcome: Demonstrated effect of the treatment train by use of project data for Mass Balance Estimation for each process step

Effect of Street Sweeping?



POLLUTANT LOADING			SOURCE REDUCTION (STREET SWEEPING) ²			PRE-TREATMENT (OIL GRIT SEPARATOR) ³			STORMWATER BMP ³			POLISHING TREATMENT (BIOCHAR) ⁴		
Pollutant	Concentration (mg/L) ¹	Annual Load (lbs)	% Reduction	Load Reduction (lbs)	Reduced Load (lbs)	% Reduction	Load Reduction (lbs)	Reduced Load (lbs)	% Reduction	Load Reduction (lbs)	Reduced Load (lbs)	% Reduction	Load Reduction (lbs)	Reduced Load (lbs)
Total Cu	0.013	0.120	31	0.037	0.083	10	0.008	0.075	23.5	0.018	0.057	77	0.044	0.013
Diss Cu	0.0065	0.060	10	0.006	0.054	0	0.000	0.054	0	0.000	0.054	77	0.042	0.012
Total Zn	0.0757	0.700	75	0.525	0.175	10	0.017	0.157	71.7	0.113	0.045	37	0.016	0.028
Diss Zn	0.029	0.268	10	0.027	0.241	0	0.000	0.241	0	0.000	0.241	37	0.089	0.152
PAHS (sum of reported PAHs)	0.00141	0.013	unk	0.000	0.013	unk	0.013	0.013	unk	0.000	0.013	90	0.012	0.001
1: Source: Chapter 6 Site Assumptions Drainage Area: 1ac Impervious Cover: 80% Annual Rainfall: 59" Runoff Coefficient: 0.77 Annual Runoff: 40.9"			2: Source: Chapter 11; assumes regenerative air sweepers with monthly sweeping; portional reduction in efficiency made for diss metals to account for reduced efficiency; note this does not account for accumulation that may occur between sweeping events			3: Based on oil grit separators which are known poor pollutant removal performers			3: Source: Chapter 3; no significant difference reported between dissolved metals influent and effluent so assumed 0% reduction			4: Source: Chapters 7 and 8; assumed eff for biochar (vs GAC); applied dissolved metals eff to total metals		

Conclusion:

- Pollutant removal efficiencies > 70% may be achievable across contaminants
- A treatment train can:
 - Improve performance for a broad range of COCs
 - Reduce maintenance burden
 - Extend the life of the structural BMP

Effect of Street Sweeping?

Estimated removal of PCBs based on collected data in this study

- Street sweeping FY24: Collection of **234 tons** of debris
- Using 'typical' street sweeping calculations:
 - 234 tons (assume US & wet) x 0.7 = 164 US dry tons = **148,750 kg** street sediment/solids
 - Using PCB conc. of ~ 50 ng/g = 50 ug/kg [Low-mid range of our data]

= ~ 7.4 g of PCBs collected

Street sweeping in this area:

- Targeted areas include
- "Arterial Roads, Industrial/Business districts, and NPDES Priority Areas."
- Sweeps are performed twice per month

→ Can Street Sweeping become more targeted?



Summary & conclusions

- 45 samples were collected over 2 years, 6 different land-uses, 2 time eras (Pre and Post PCB ban in 1970s)
- **Highest** total PCB concentrations in **Pre-1970s Residential** and **Industrial** areas
- **Reductions** in total PCB concentrations from **37-61%** were observed **Post-1970s**
- Sources of PCBs are not 'clean' Aroclors, but are mixed
- **PCB-11** (non-Aroclor) from yellow road paint contributes from **0-33%** of the total PCB mass
- Stormwater is an important carrier of PCBs
- **Street sweeping, catchment basin clean-outs and biodegradation** in BMPs can reduce PCB mass
- Work with practitioners – the **Chesapeake Bay Trust** facilitates and supports interactions



PCBs FREE

E.P.A. Bans Discharge of PCB's Directly Into the Nation's Waters

By HAYARD WEBSTER

The Environmental Protection Agency yesterday ordered the ban of the direct discharge of PCB's, a highly toxic industrial chemical, into United States waters.

The chemical, a close relative of DDT, has been found in scientific studies to cause deformities in fetuses, changes in liver function, nervous disorders and cancers in animals. Widespread in the environment, it is found in almost all major bodies of water in the world. Significant amounts have also been monitored in the air.

The ban follows results of recent studies that show that its levels in water and fish exceed by several factors those standards set by the E.P.A. and the Food and Drug Administration.

The only plants covered by the ban are some 20 factories that manufacture electrical transformers and capacitors and discharge their PCB's, used in electrical insulation, into bodies of water.

The E.P.A. noted in announcing the ban yesterday that "past widespread use of the chemicals in the production of lubricant additives, hydraulic and compressor fluid, carbonless copy paper, plasticizers, paints and other products has resulted in PCB's being present throughout the environment."

"Although most of these uses have now been substantially curtailed, PCB's which have entered the environment cannot in most cases be recovered and will require many years to degrade. The public will be alerted to potential hazards by careful long-term monitoring of PCB levels in food."

One of the most prominent PCB contamination cases involved the General Electric Company, which had been dumping its PCB wastes into the Hudson River, causing fish to accumulate many times the permissible level of the chemical. A negotiated settlement between the company and the State Department of Environmental Conservation resulted in G.E.'s agreeing to cease its dumping and to pay \$3 million toward cleansing the river and \$1 million for research toward ending the problem.

The ban did not cover the PCB wastes of transformer plants that discharge their wastes into municipal sewage systems. Such "indirect" discharges, the E.P.A. said, would be taken care of by additional regulations being prepared by the environmental agencies.

The ruling, which in effect calls for the zero discharge of PCB's into many bodies of water, follows the recent studies that indicated that the recently proposed permissible standard of one part per billion of PCB's in transformer plant waste waters could not be met.

The present problem of PCB contamination in the environment is so severe that in many waters throughout the United States PCB levels are already in excess of the criteria," E.P.A. Administrator Russell E. Train said in announcing the ban. His action came on the final day under the law for a decision in the PCB case, which had been argued most prominently by the Environmental Defense Fund, a Washington-based environmental law firm principally responsible for the banning of DDT in 1972.

The industrial chemical is widely used for insulating electrical equipment, in the recycling of wastewater, and in metal casting plants. Because of its widespread distribution in the environment, its resistance to biological degradation with a half-life of more than 20 years, PCB's are considered one of the most serious of the many environmental contamination problems prevalent today.

Monsanto Industrial Chemicals Company, the only American maker of the chemical, announced several months ago that it would quit production of the substance by October 31 of this year. There are no restrictions on the importation of PCB's. The Food and Drug Administration has already banned use of the chemical in the processing of food and feed, where it was sometimes used as a cloth and paper insulation in containers and cartons.

Acknowledgements



Janis Markusic Douglas Griffith
Anne Arundel County Bureau of
Watershed Protection & Restoration



Elizabeth Sklaire Suyue Cao



Catherine Elliott



Allen P. Davis




*[Collaborations and interactions overall are appreciated.
Please reach out if you are interested – bvk@umd.edu]*



QUESTIONS?

Contact: bvk@umd.edu



Land Use and Era of Development Effects on PCB Contamination of Soils and Stormwater Sediments in the Chesapeake Bay Watershed



Translation Slides

What are the take home points?
What does this mean for me?

Douglas Griffith (Anne Arundel County Bureau of Watershed Protection
& Restoration)

Breck Sullivan (Chesapeake Bay Program)

Take-Home Messages

- Not all PCBs are created equal
 - 12 (of 209) congeners are identified as toxic
- Development era (pre- or post- 1979 ban) and land use are important factors in source assessment & ID.
 - PCB contribution from pre-ban residential and industrial sites much higher than contribution from post-ban counterparts.
 - Different congeners b/t industrial and residential sites
- Potential for PCB remediation in BMPs – IE designed to do so.


What does this mean for me?

Anne Arundel County

- **Regulatory:** TMDLs could be revised to focus on Aroclors or toxic congeners only, instead of *total* PCBs by weight
 - **Example:** Road paint – PCB11 may be a large contributor to overall SW loads, but is less toxic
- **Targeting:** Land use and development can inform focus areas and BMP type for best “bang-for-buck”
 - **Example:** Concentrating street sweeping in pre-ban era residential and industrial eras
- **Degradation:** PCB type in SW load can inform the type of BMP necessary to achieve full degradation
 - **Example:** Require anaerobic soil conditions, therefore wet ponds are not ideal for PCB remediation

Next steps


- Assess the impact of soil and particle types
- Expand the road pain study to include other paint colors
- Assess presence of other PCB sources and their contributions
- Investigate if stormwater BMPs can be designed to remove PCBs simultaneously with other contaminants (N, P) via biodegradation, bioaugmentation?

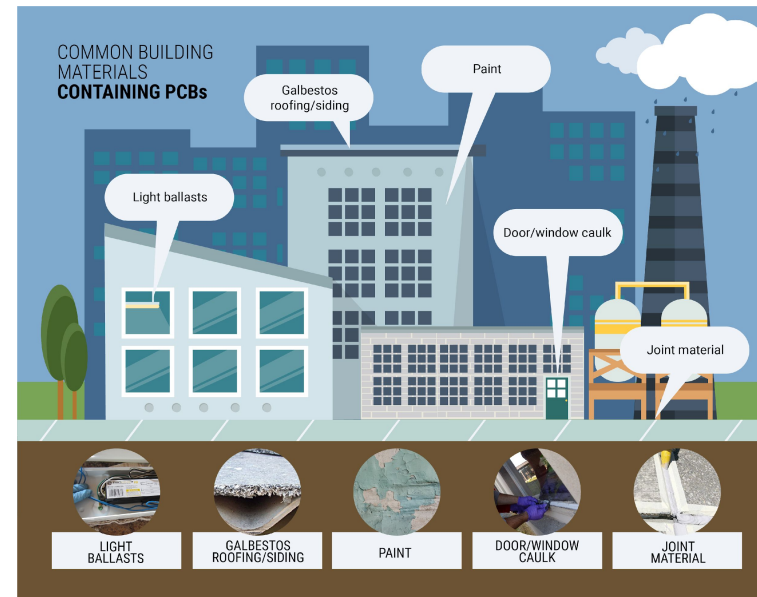

EXTRA SLIDES

Causes of water impairment in the US

Leading Cause of Impairment by Acres of Lakes, Reservoirs and Ponds

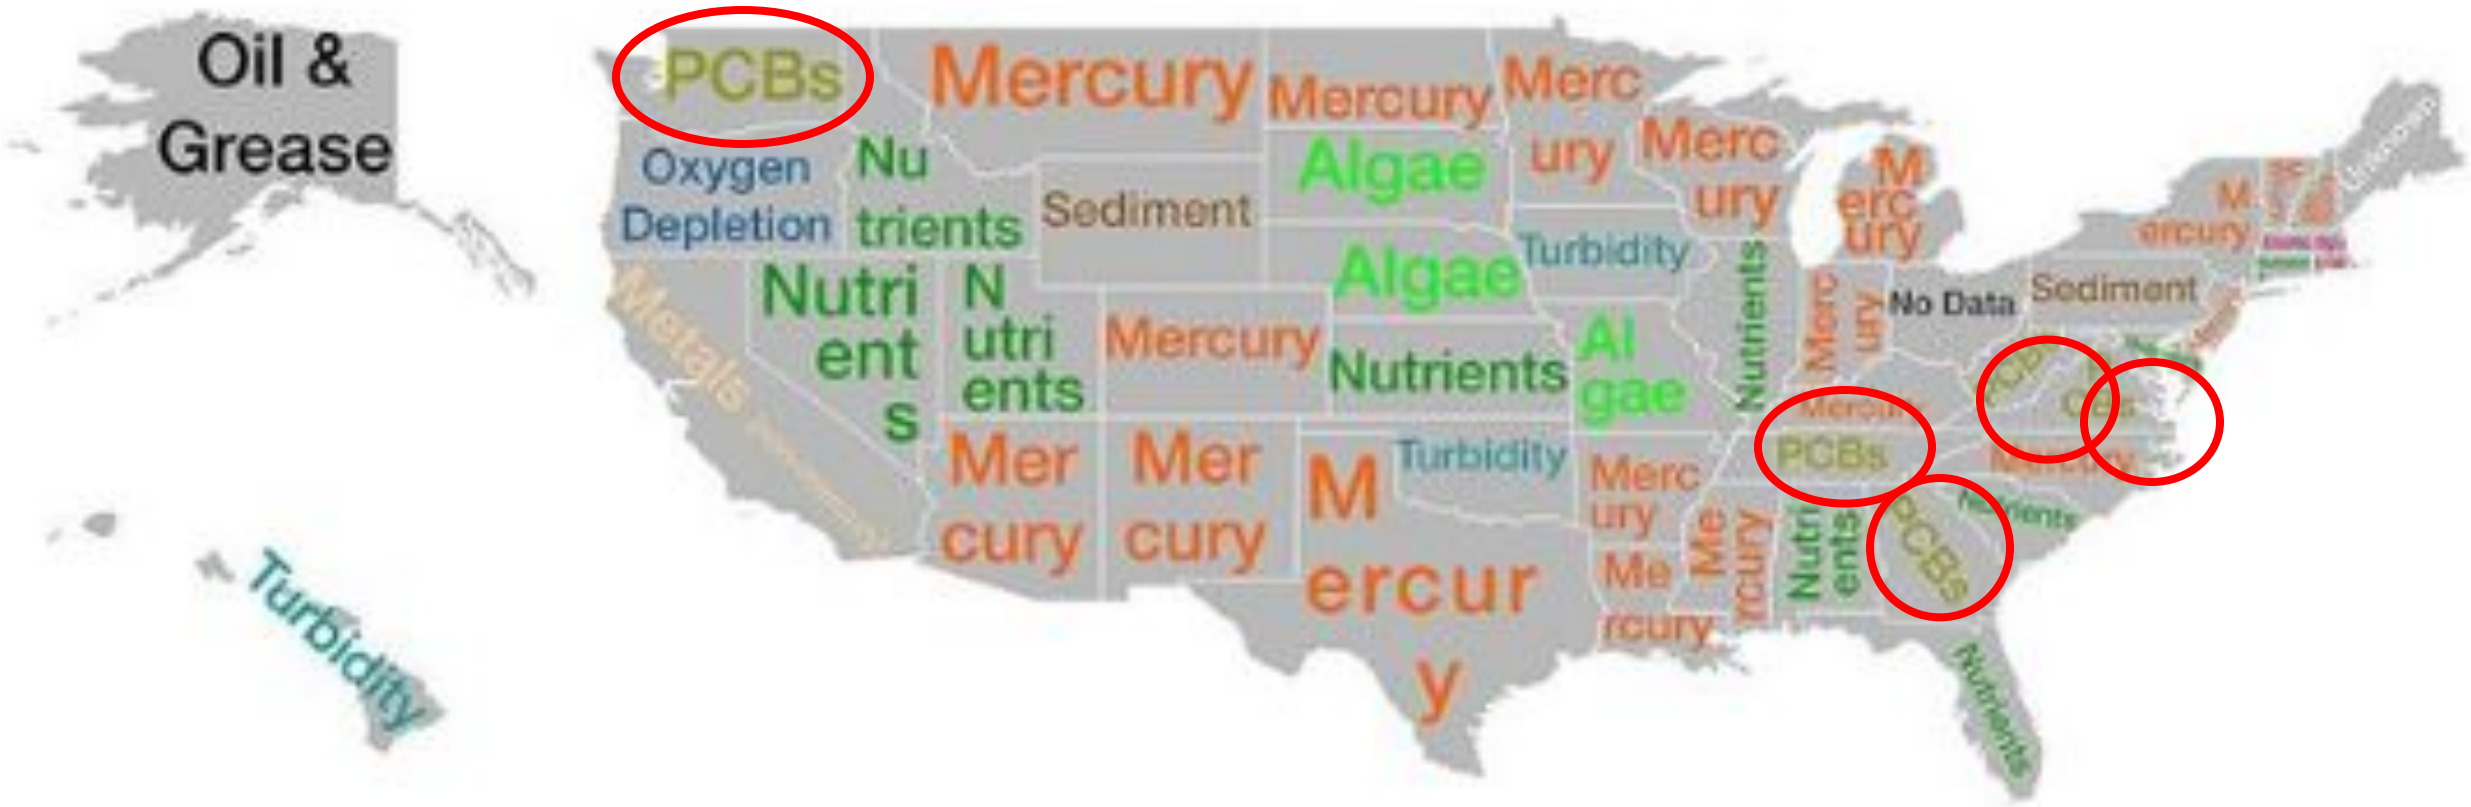

Impact of soil physicochemical properties?

Soil Physicochemical

- Moisture Content (MC)
- Organic Matter (OM)
- pH
- Electricity Conductivity (EC)

Parameter	Range	
	Max	Min
MC (%)	42.3	< MC% limit
OM (%)	32.4	0.24
EC ($\mu\text{S}/\text{cm}$)	806	62.3
pH	8.84	6.15

Total PCB Concentrations

Total PCB concentration (ng/g)	Range	
	Min.	Max.
	1.27	381


Impact of soil physicochemical properties?

Soil Physicochemical

- Moisture Content (MC)
- Organic Matter (OM)
- pH
- Electricity Conductivity (EC)

VS





Total PCB Concentrations

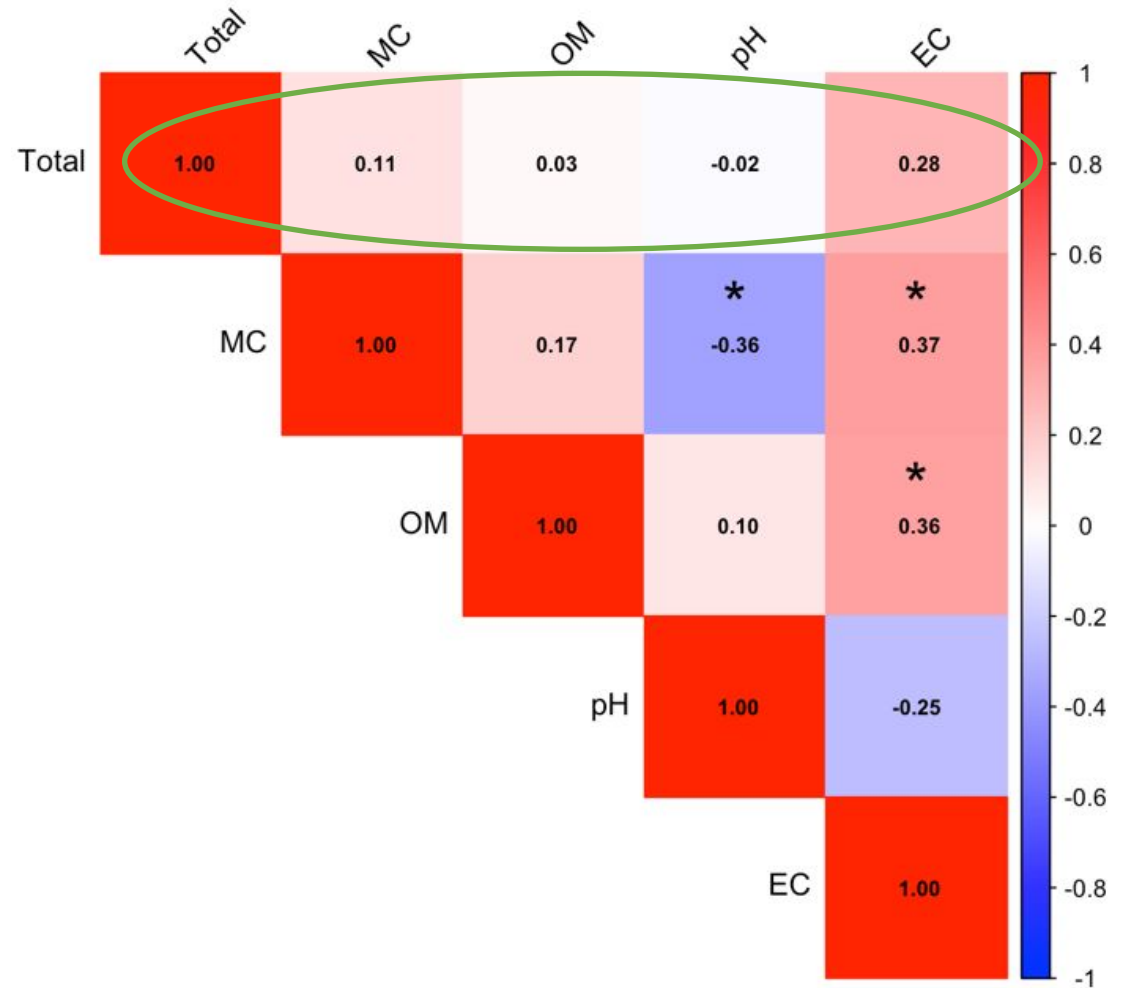

No Significant Correlation

PCB Toxicity

- 12 PCB congeners (of total 209) are **VERY** toxic
- **“Dioxin-like PCBs”** – due to chemical structure
- Can be caused by bacterial degradation in **soil biofilms**

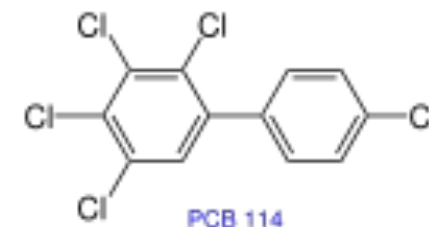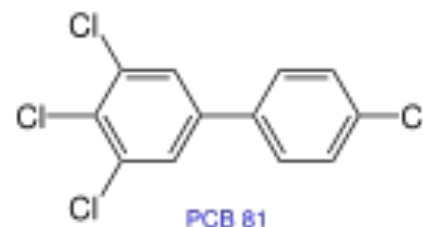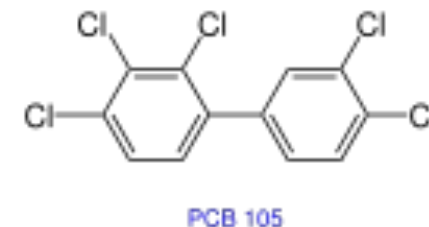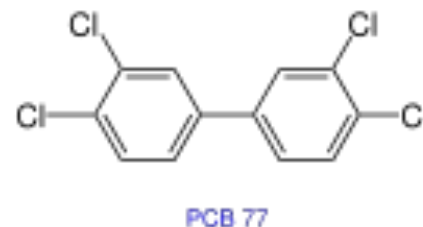

Toxicity Equivalency Factors

PCB congener	IUPAC No.	Mammals	Fish	Birds
Non-ortho PCBs				
3,4,4',5-	81	0.0001 ^{a,b,c,e}	0.0005	0.1 ^e
3,3',4,4'-	77	0.0001	0.0001	0.05
3,3',4,4',5-	126	0.1	0.005	0.1
3,3',4,4',5,5'-	169	0.01	0.00005	0.001



Toxicity Equivalency Factors

Dioxin-like PCB	TEF
77	0.0001
81	0.0003
126	0.1
169	0.03
105	0.00003
114	0.00003
118	0.00003
123	0.00003
156	0.00003
157	0.00003
167	0.00003
189	0.00003

TEQ_{PCB} **Safe sediment Value = 20 pg TEQ/g** (Eljarrat et al., 2001)

Date from this study:

Land Use	Development	Sample information	TEQ-PVB
Residential	Pre-1970s	Res-Pre70-3	26.3±36.9
Industrial	Pre-1970s	ID-Pre70-1	41.2±2.02
Industrial	Pre-1970s	ID-Pre70-4	41.2±2.02

Summary:

- Samples which TEQ exceed the safe sediment value are listed
- 3 of 45 samples **exceeded** the Safe Sediment Value
- These 3 samples were from **Pre-1970s: Residential** and **Industrial**
- All other samples are below the safe limit or <MDL