



# Assessing 2035 Climate Change Risks to TMDL in the Rappahannock River using SCHISM

(co-)PIs: Qubin Qin, Jian Shen, Zhengui Wang, and Pierre St-Laurent

Advisory team: Joseph Zhang and Marjorie Friedrichs


# Objectives and tasks

- **Goal:** to develop and calibrate a high-resolution hydrodynamic-water quality model for the Rappahannock River, which will enable us to investigate and assess the water quality of the river.
- Specifically, we aim to use the model to forecast the potential risks to TMDL due to climate change by the year 2035.

- Task 1: revise the current MBM grid of the Rappahannock River and increase the resolution in accordance with Modeling Workgroup's recommendations and important dynamic properties of the river to ensure sufficient spatial coverage and resolution to represent the true geometry and bathymetry of the river.
- Task 2: work with the MBM team to transfer of the latest version of the SCHISM-ICM model code and the open boundary conditions generated by the MBM. We will setup the model and test the tributary model. We will also provide feedback to MBM for any issues and required changes in tools used for model setup.
- Task 3: work closely with watershed, airshed, hydrological modeling groups to ensure proper execution of coupling, scaling, and interface mechanisms, as well as incorporating information on climate change and model biochemical parameters for the water quality model.
- Task 4: conduct full calibration and verification of hydrodynamic and water quality model.
- Task 5: understand the physical-biogeochemical processes in the Rappahannock River and conduct management and climate change scenarios.
- Task 6: document the findings and recommendations in the final report.
- Task 7: transfer of the software package to CBPO for operational testing. During this phase, we will collaborate with CBPO personnel to conduct tests on the model package in operational environments and address any issues that may arise.
- Task 8: disseminate our research findings and experiences via 1-2 journal papers each year.

- Task 1: revise the current MBM grid of the Rappahannock River and increase the resolution in accordance with Modeling Workgroup's recommendations and important dynamic properties of the river to ensure sufficient spatial coverage and resolution to represent the true geometry and bathymetry of the river.

## Chesapeake Bay Model

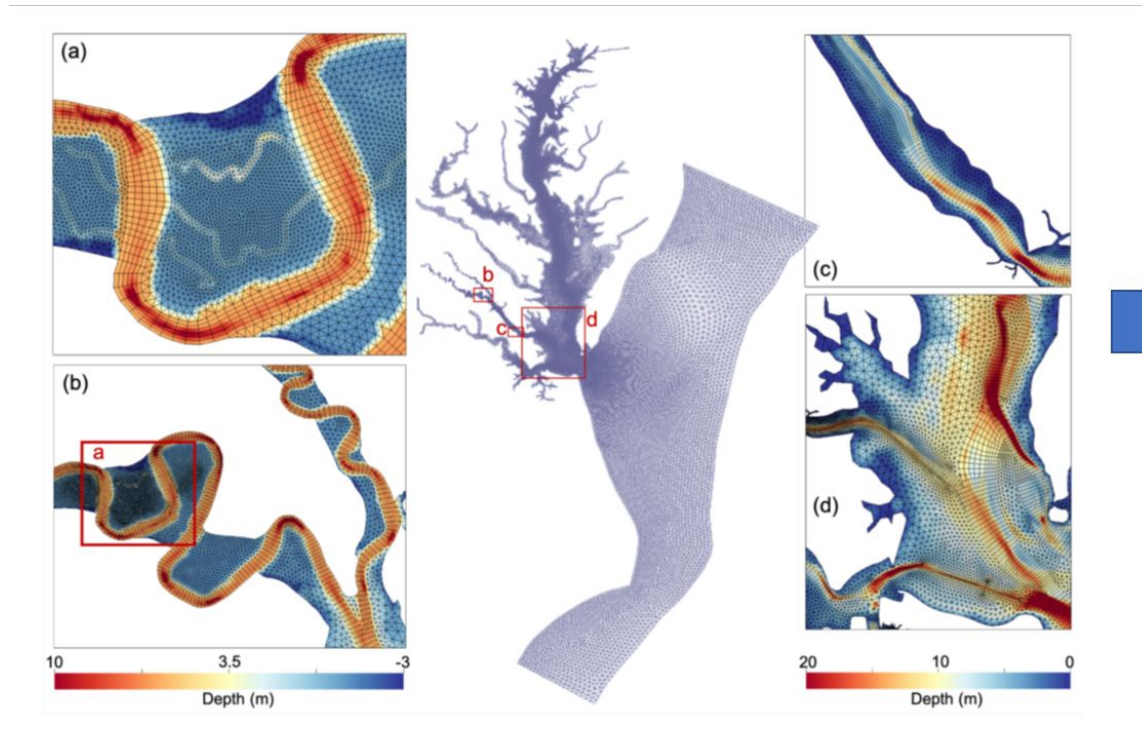


Cai et al. 2022

## Rapp. River Model





<https://ecoreportcard.org/report-cards/chesapeake-bay/watershed-regions/rappahannock/>


First, refine the  
Rappahannock River in  
the Bay model  
*Run and calibration*

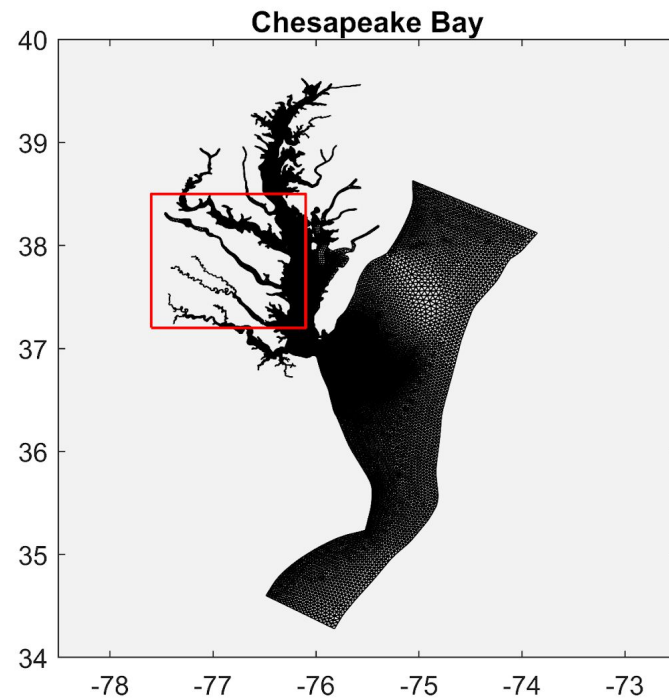

Old


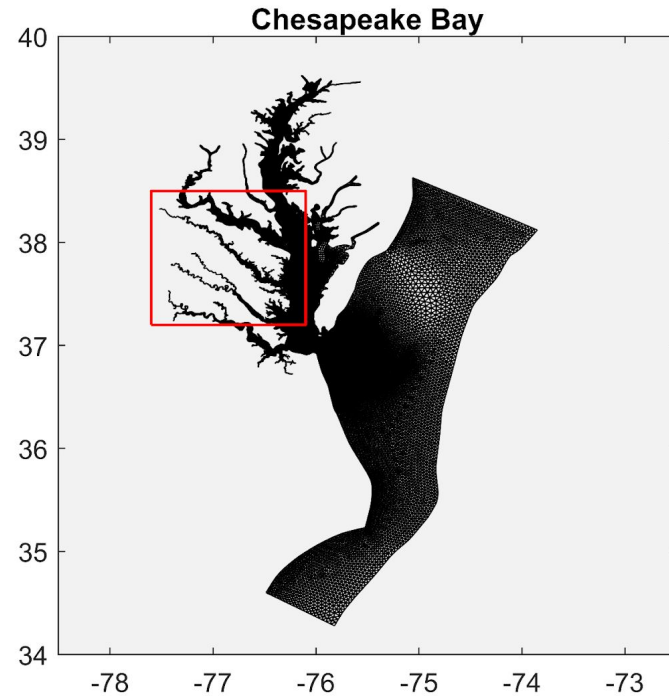
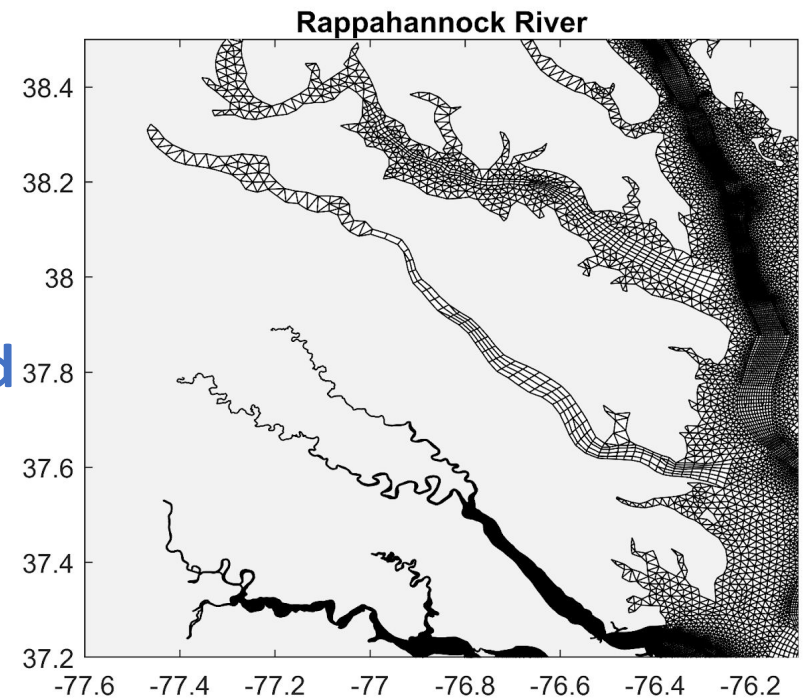


New

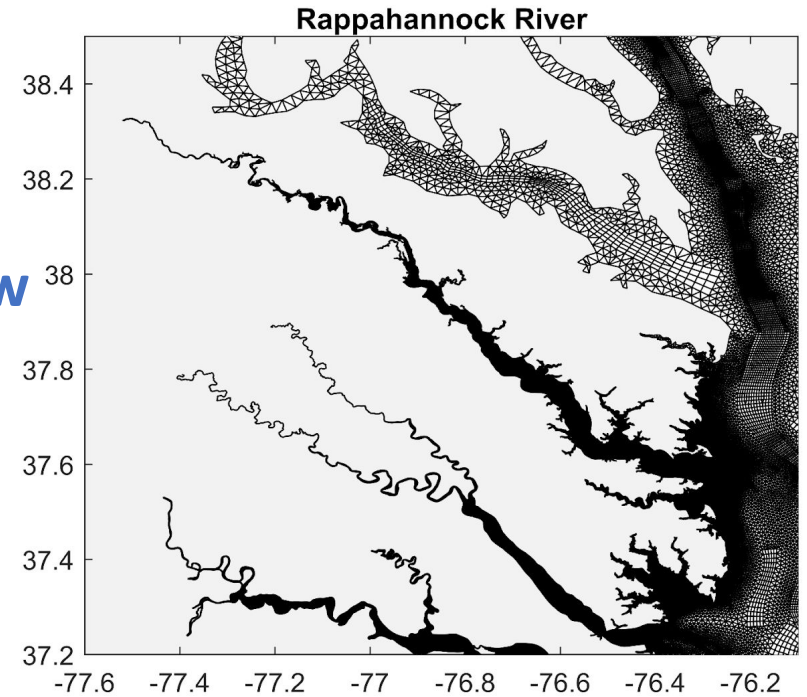



Second, cut out the Rappahannock River and use the large bay model to provide the boundary conditions

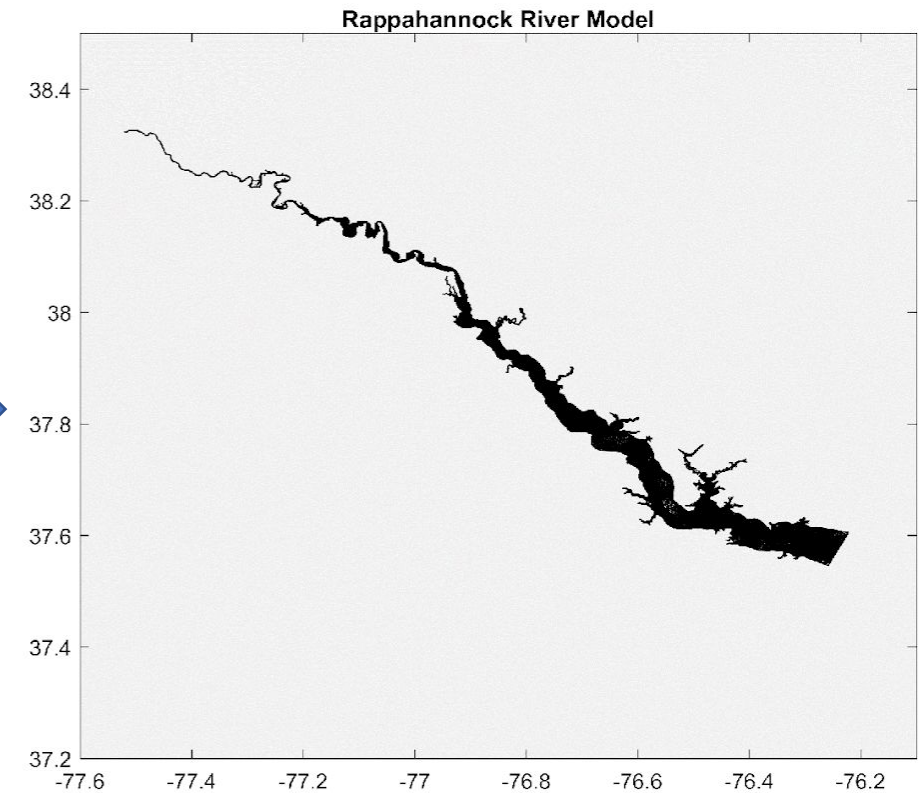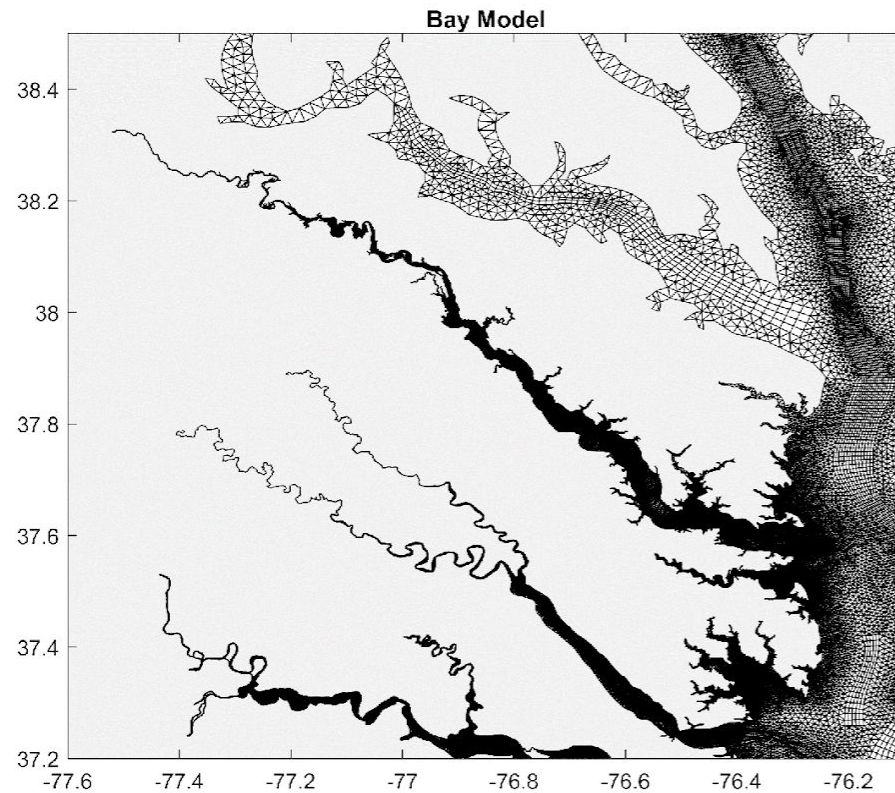





# **Apply a Particle Tracking Model to Analyze Impacts of Water Intake on Ichthyoplankton Mortality in Tidal Freshwater Region of the Rappahannock River**



Qubin Qin, Jian Shen, and Troy D. Tuckey



# model refined near the intake area

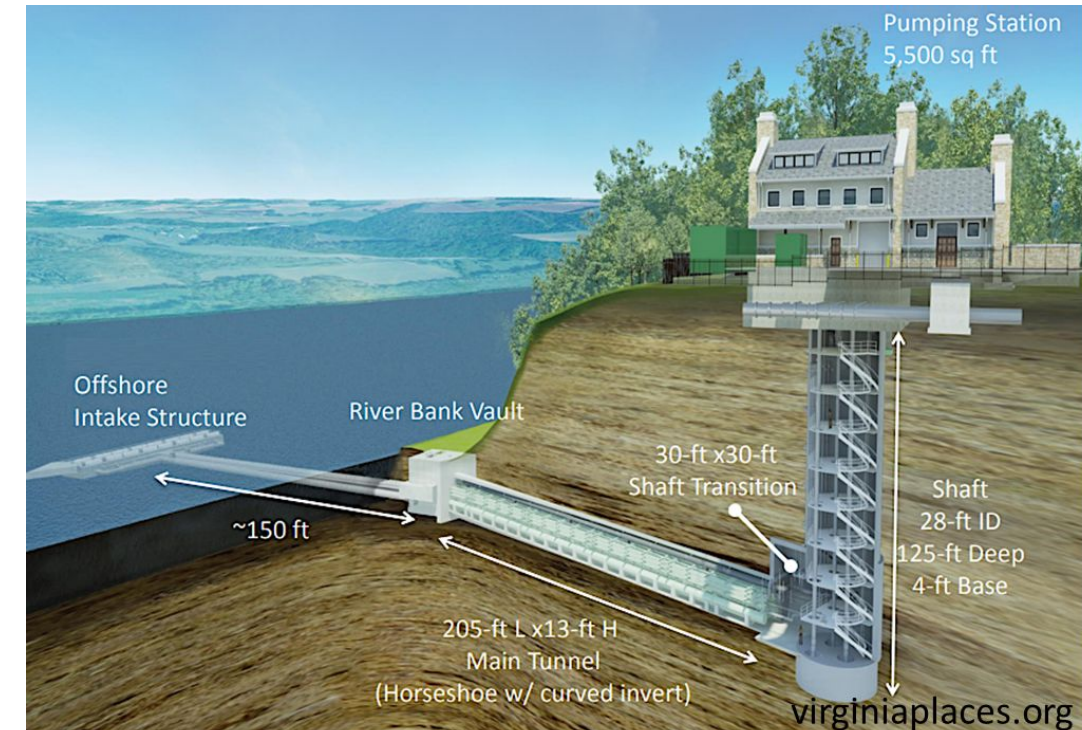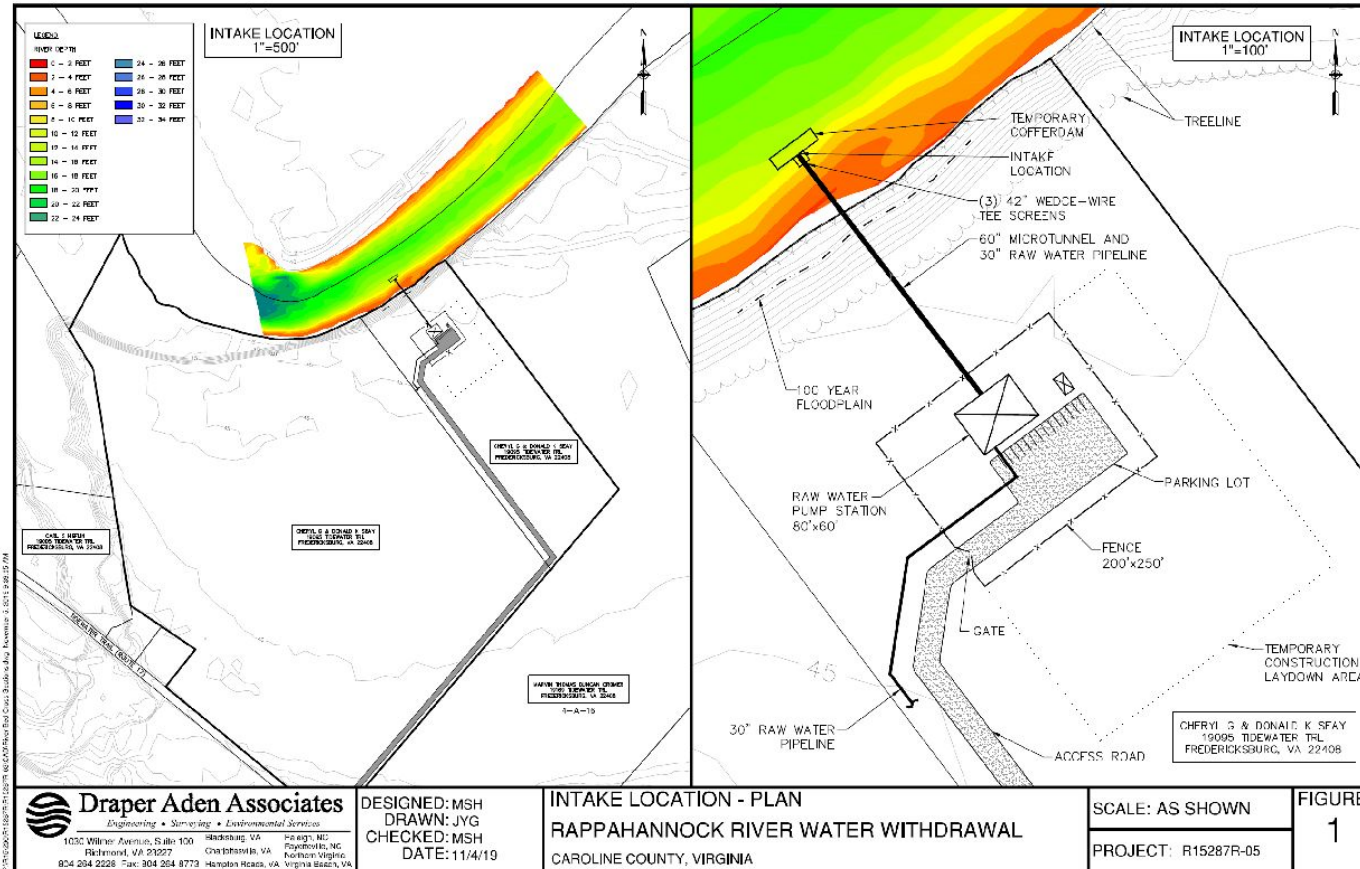




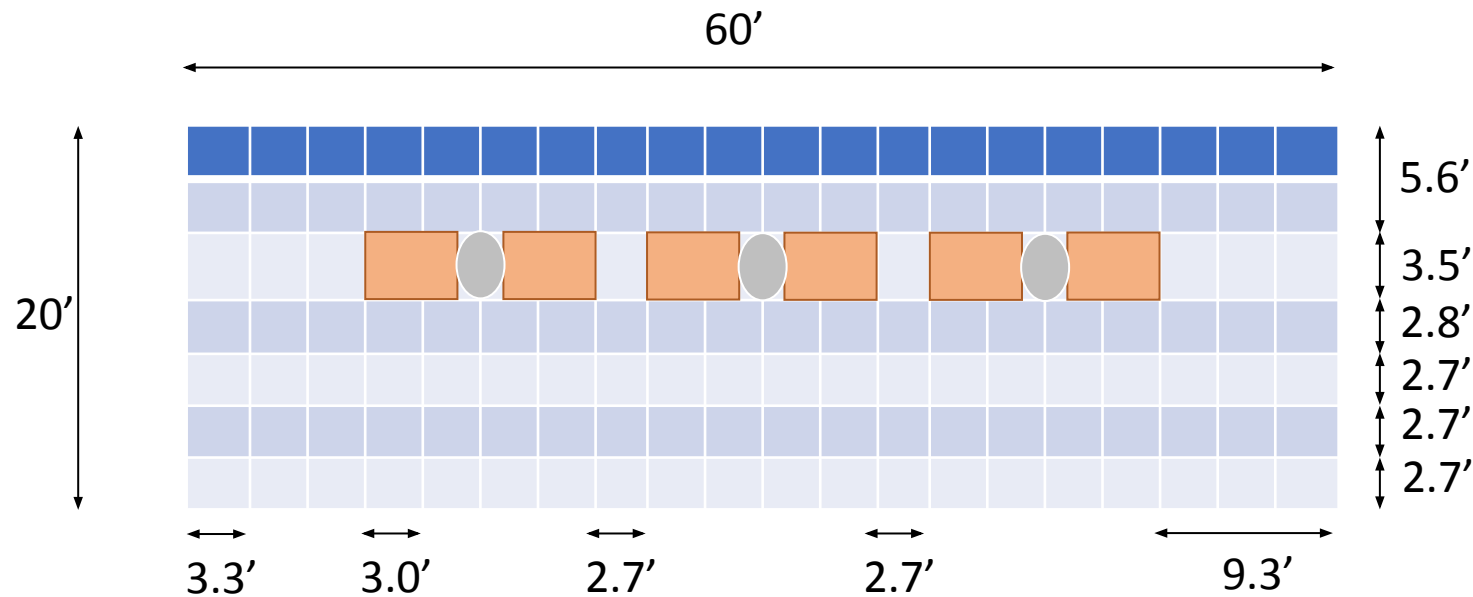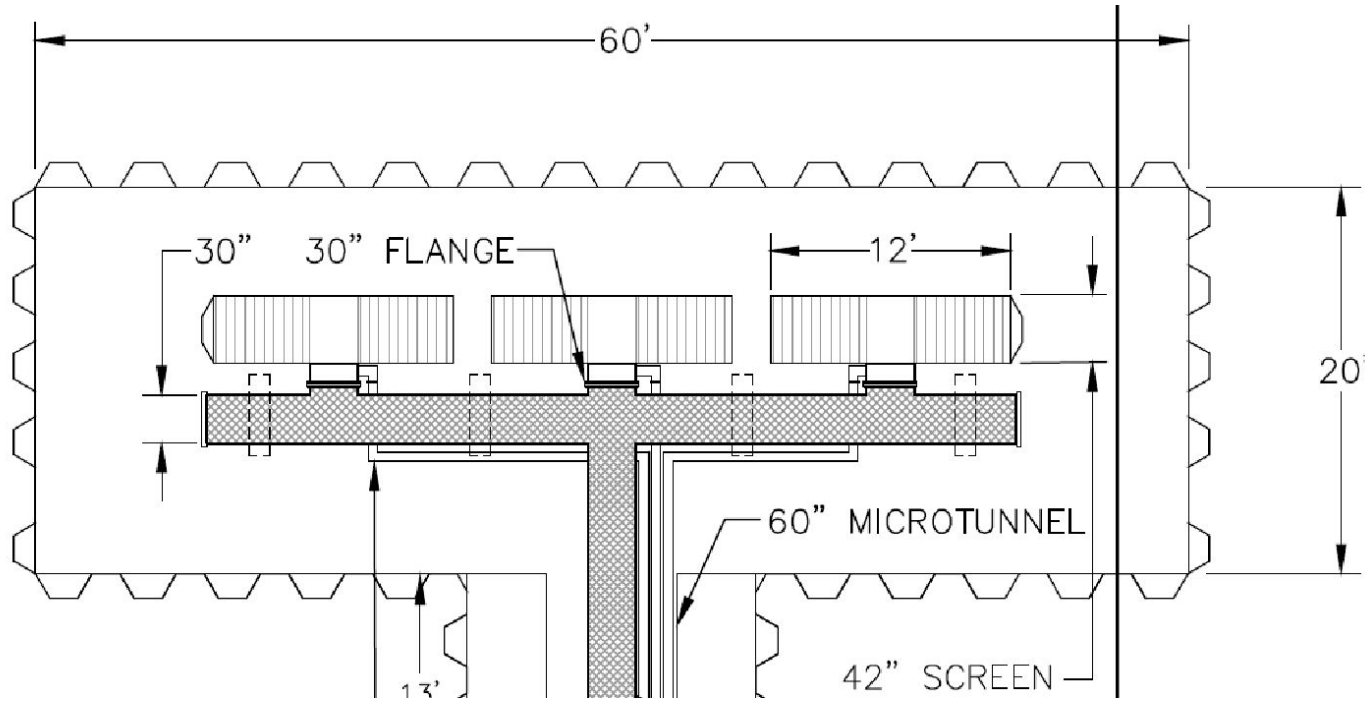

3 intake screens

12 grid elements (= 4\*3)

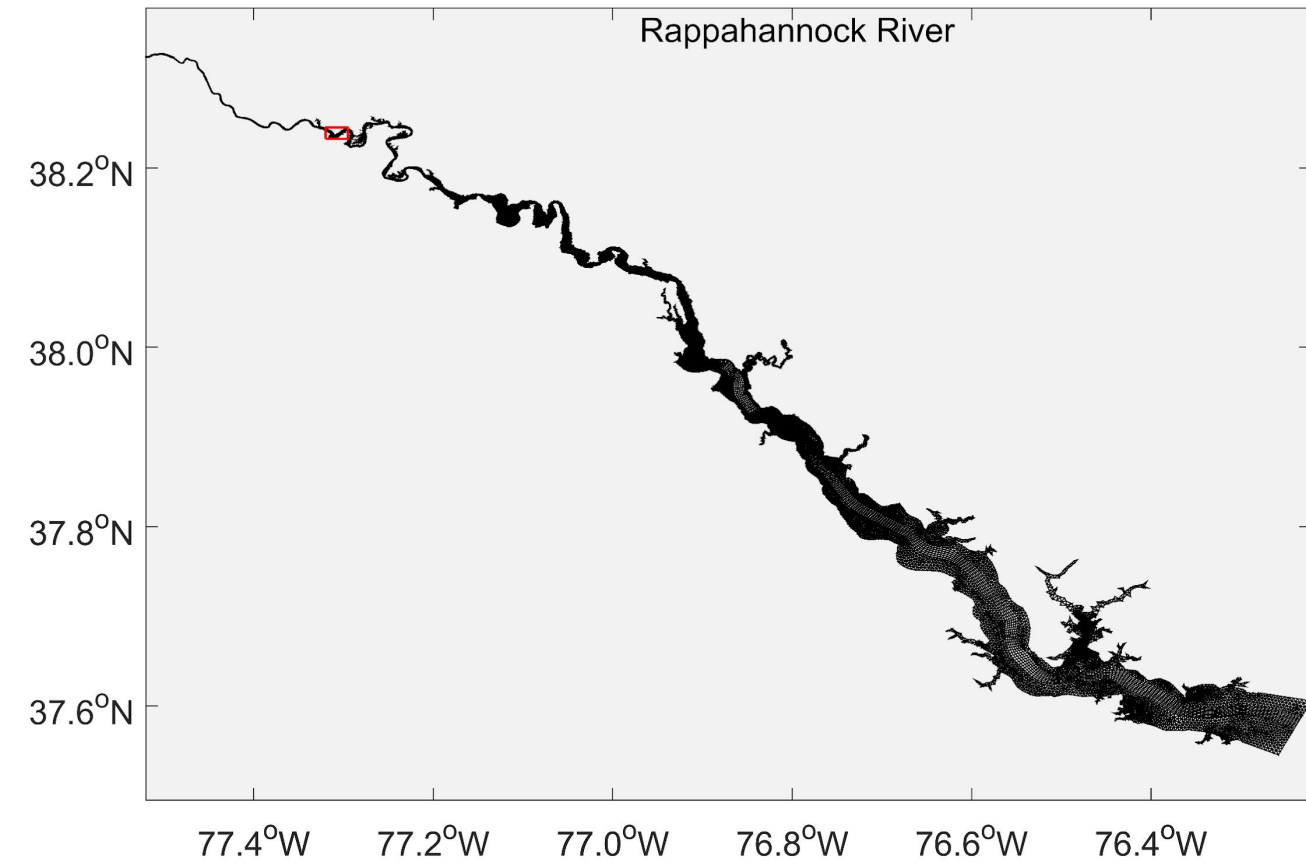

Refined near the intake



Fine resolution: size is as small as 2 feet

Bottom is set to be 12.5 feet MLW

5 vertical layers


Water is withdrawn from the bottom

13.9 mgd

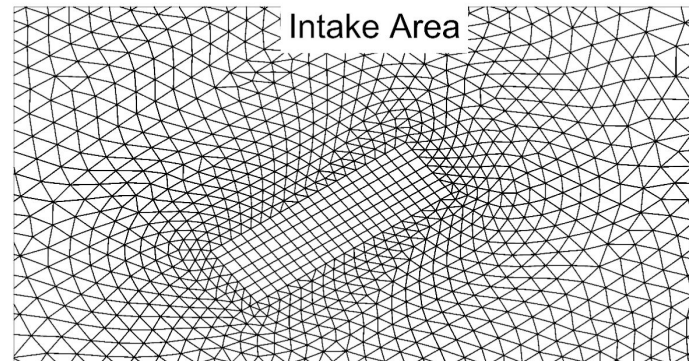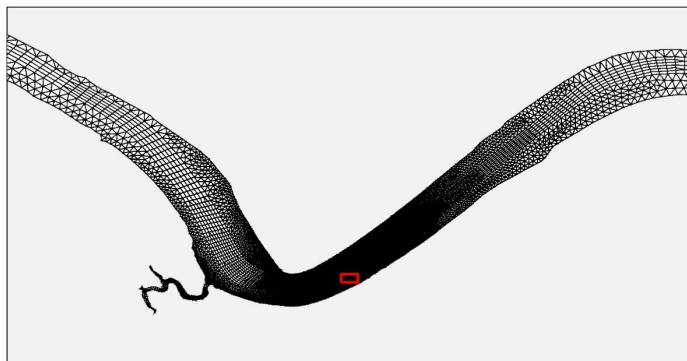

# Run hydrodynamic model for a selected year

Statistics of daily river discharge of the Rappahannock River over 1907 to 2022

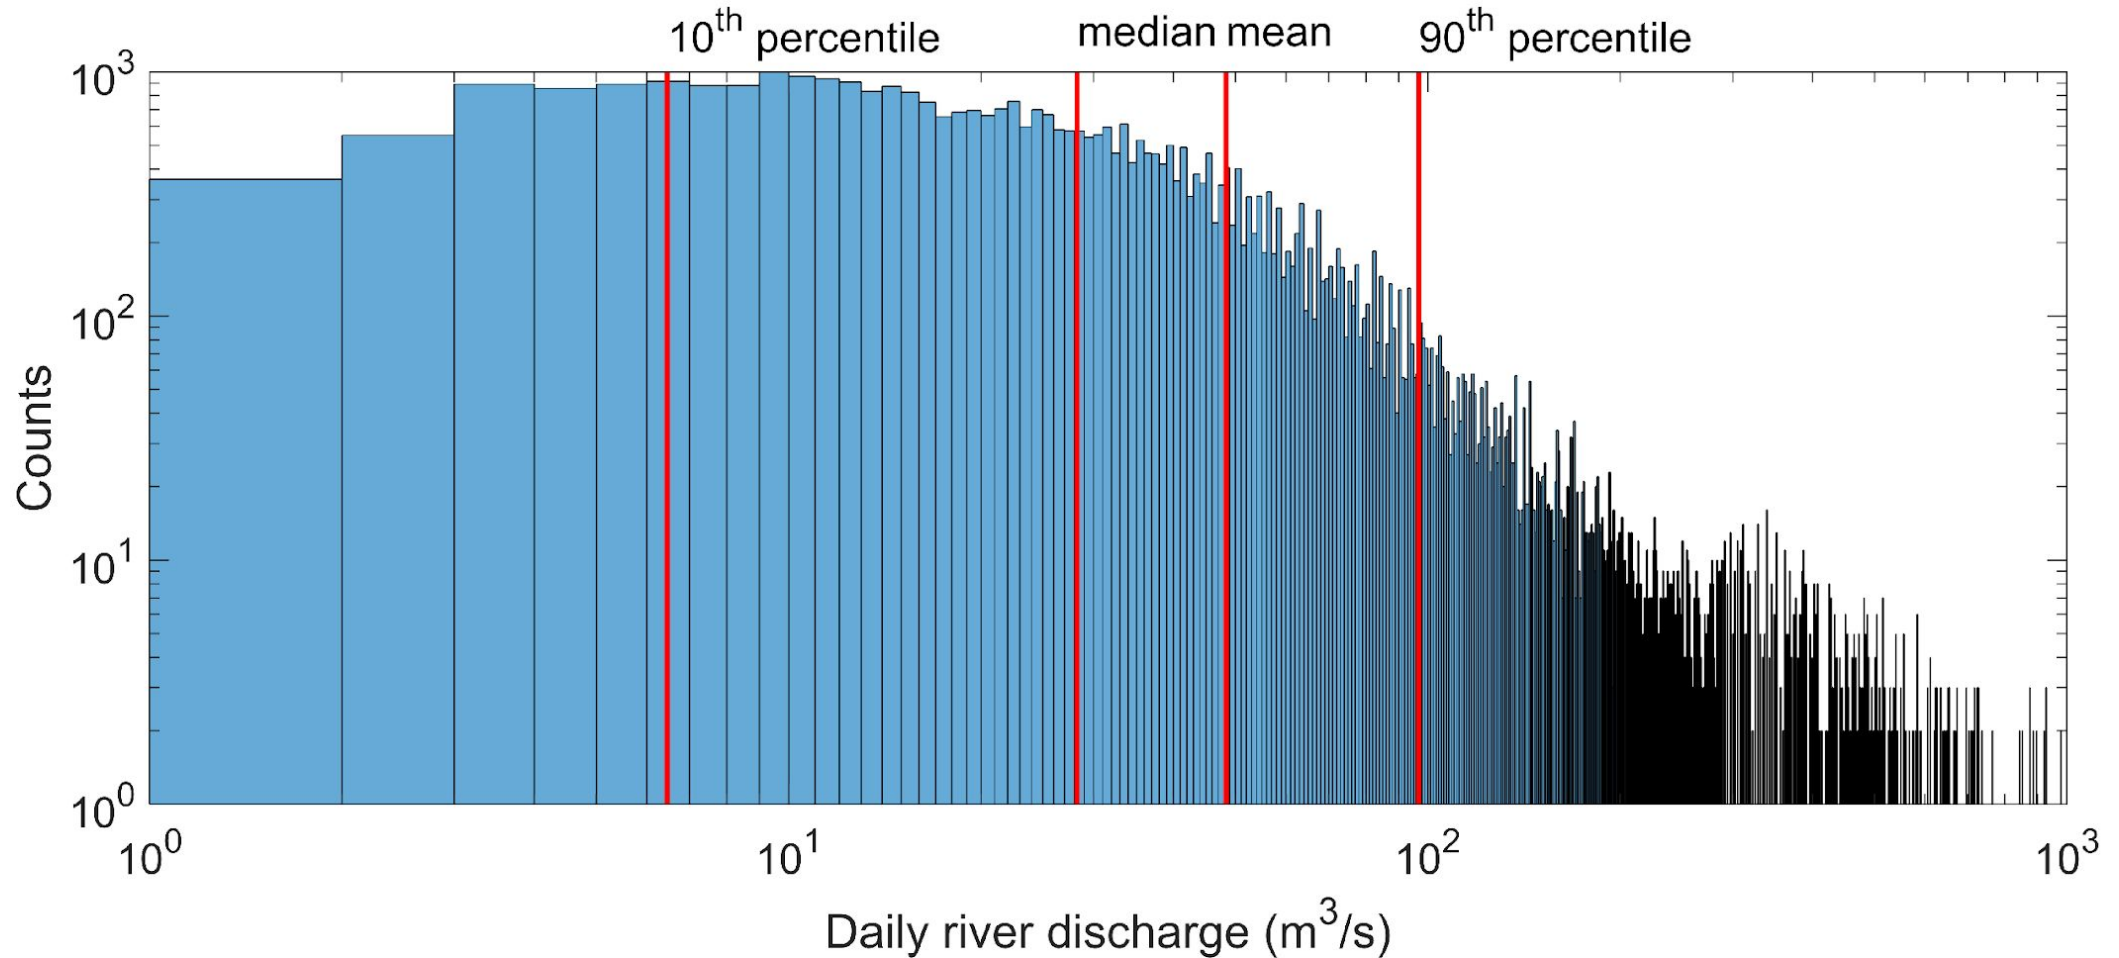

The mean and median flows are 48.3 and 28.3 m<sup>3</sup>/s respectively.


Moderate condition

The 10<sup>th</sup> and 90<sup>th</sup> percentiles are 6.5 and 96.8 m<sup>3</sup>/s, respectively.


Low and high condition




# Daily river discharge of the Rappahannock River in 2011

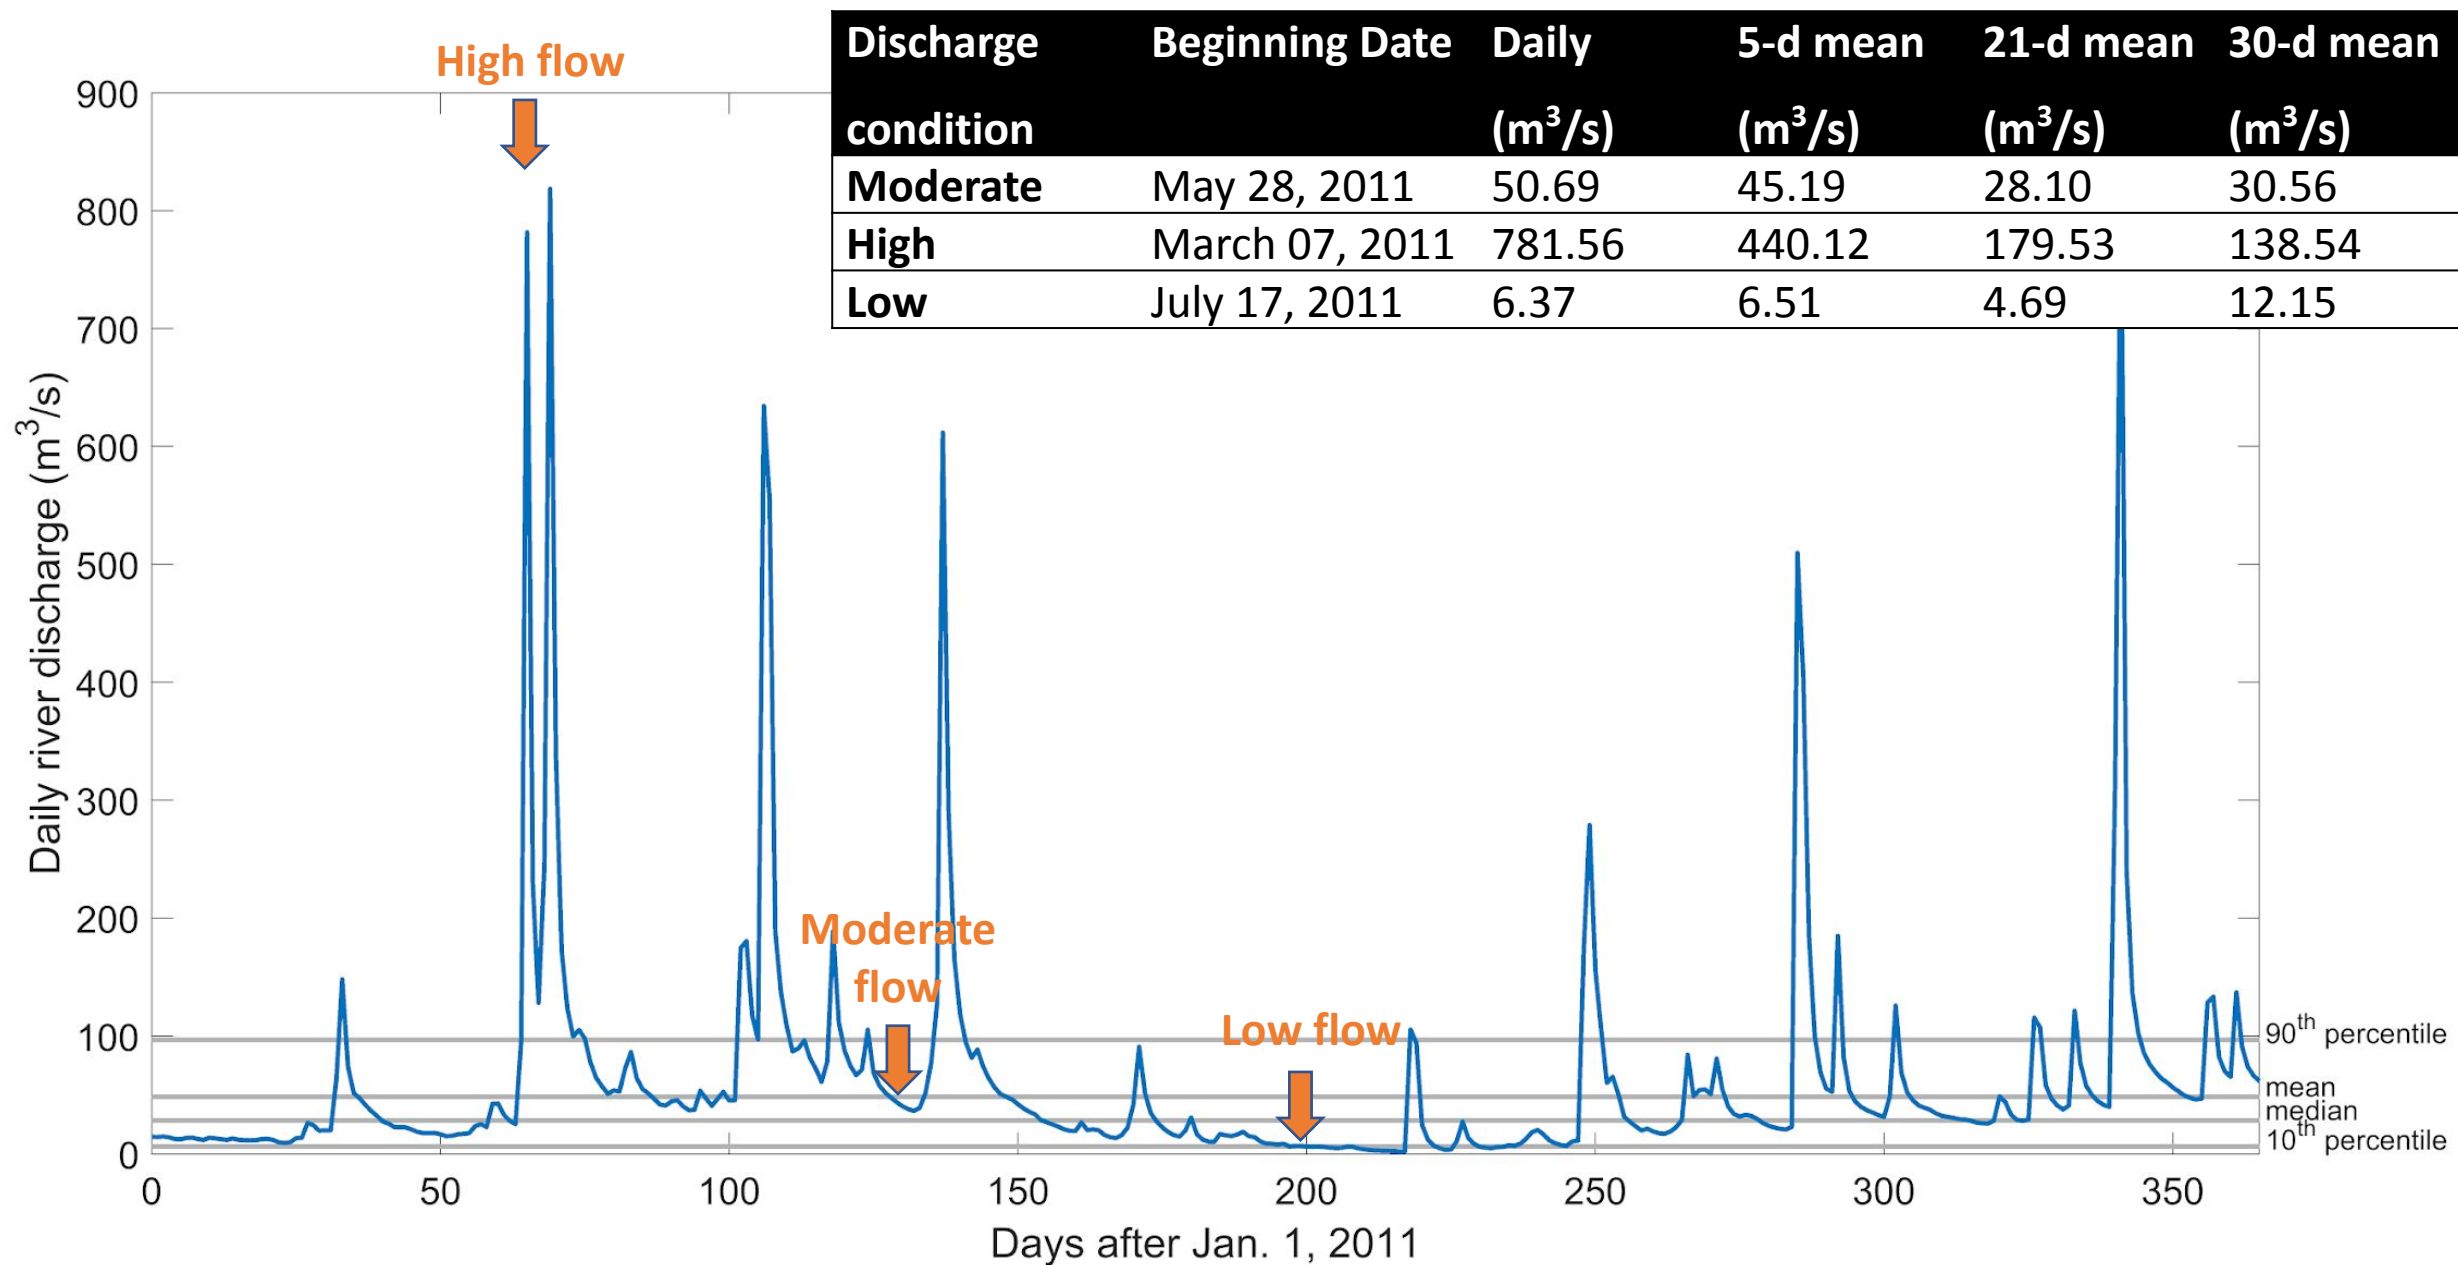

# Calibration of tidal range along the river

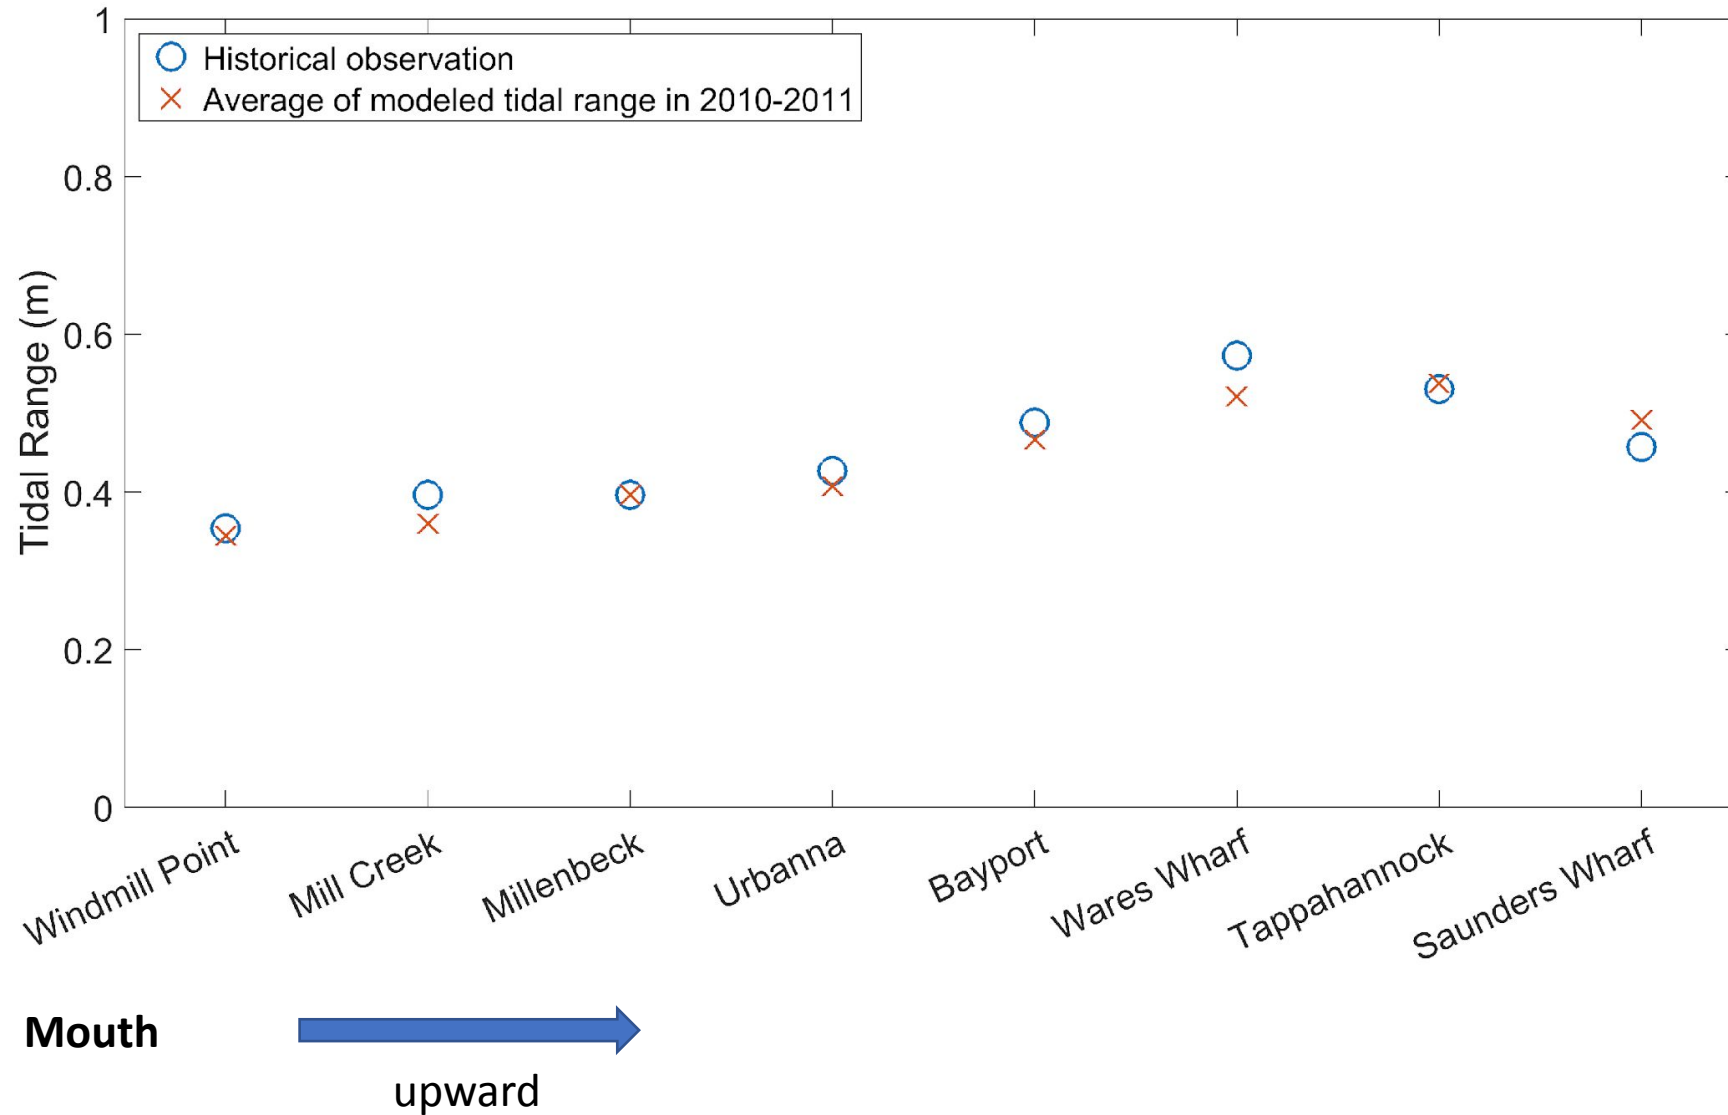

# Calibration of salinity along the river for the selected year

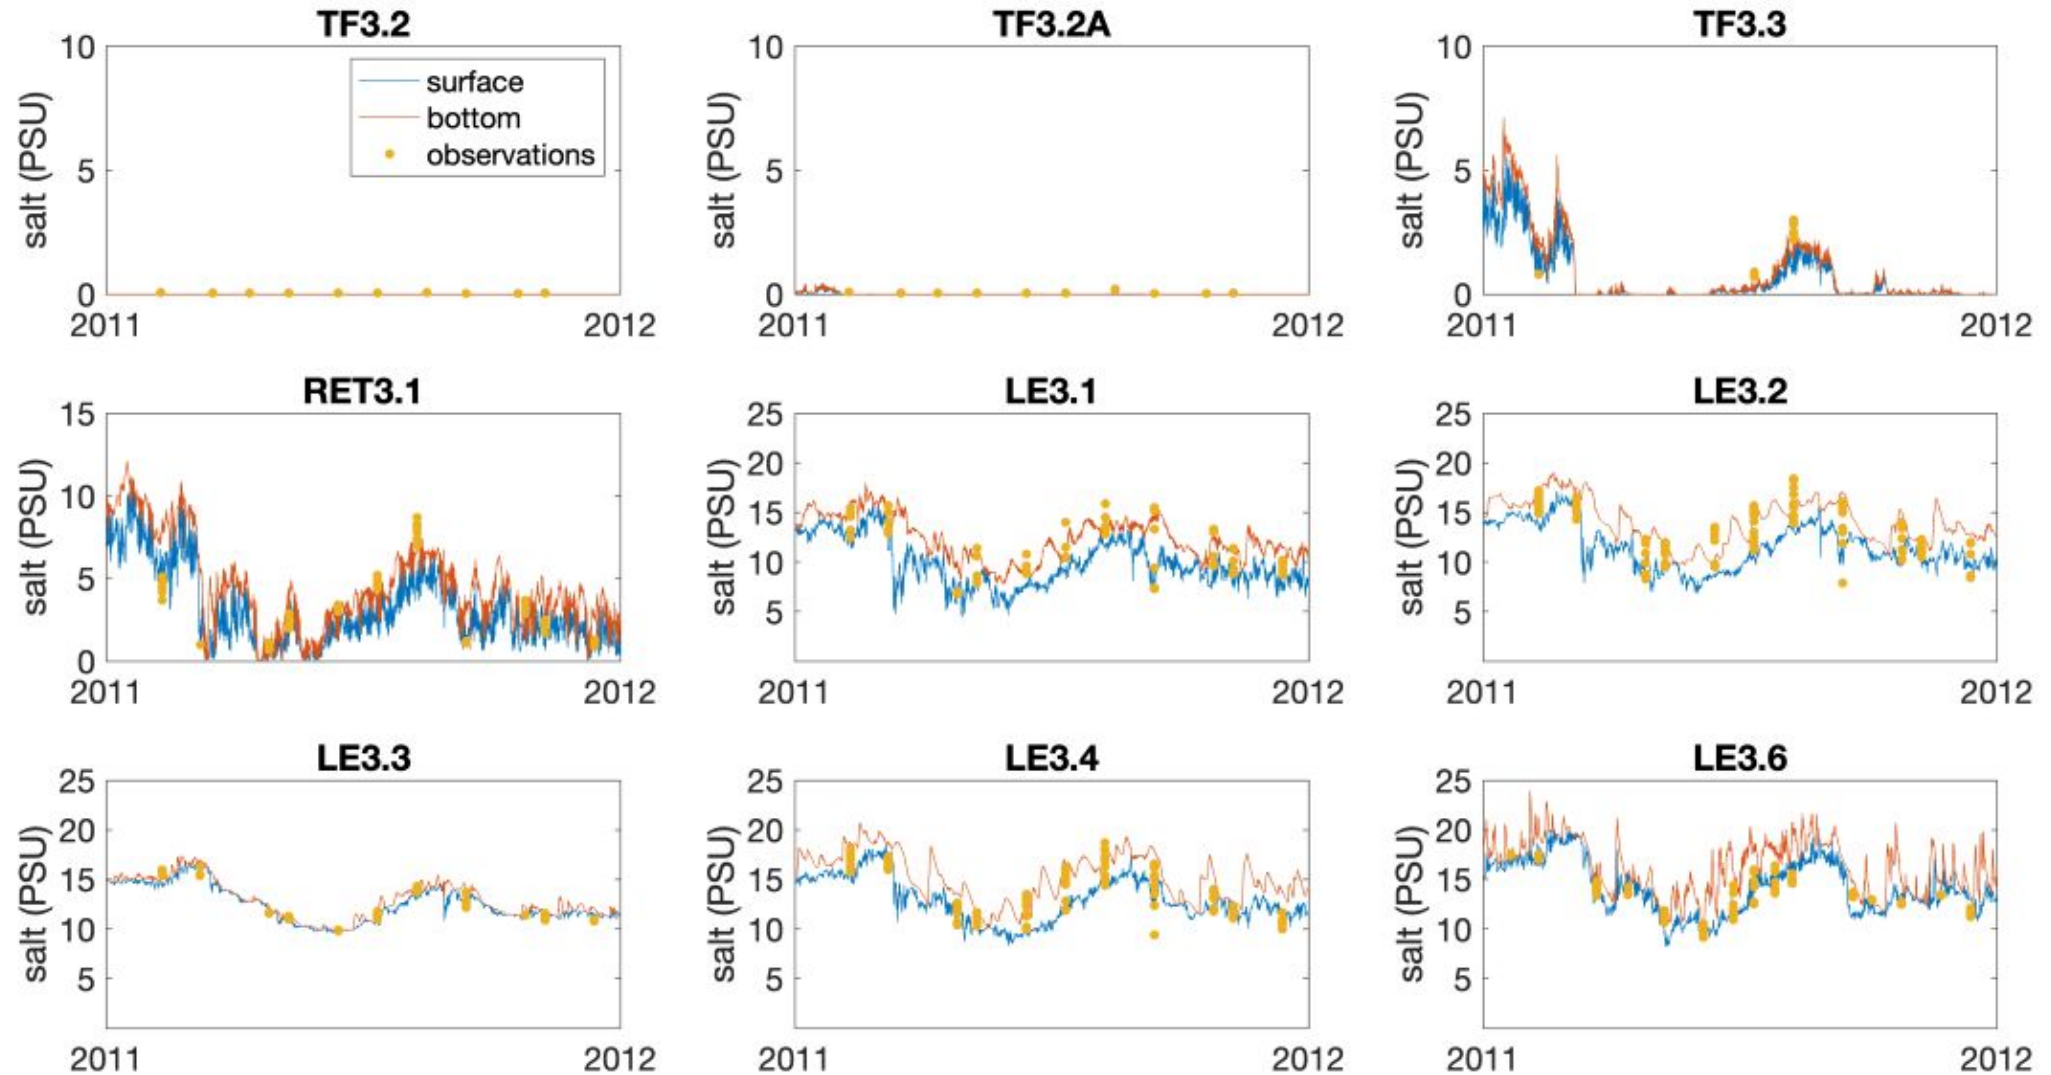



# Particle tracking scenarios

## Forward tracking scenarios


Different locations: near, upstream, downstream the intake

Different release methods: one-time vs. continuous


Different flow conditions: moderate, high, low

Different vertical velocities: passive vs. active

## Backward tracking scenario

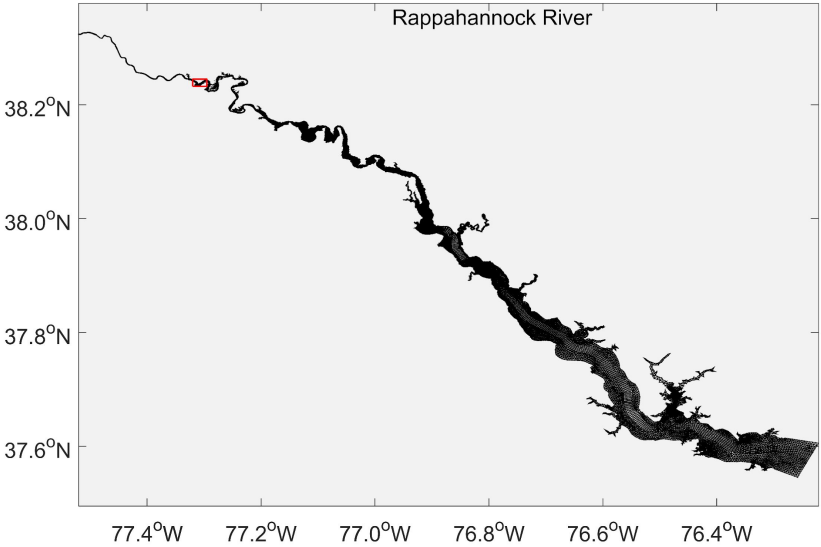

Daily river discharge of the Rappahannock River in 2011

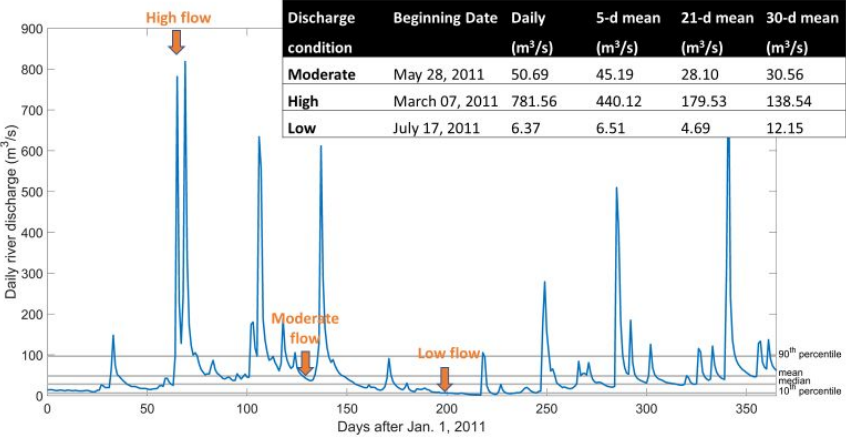


# Particle Tracking model

Particles represent fish eggs or larvae

Passive particles: neutrally buoyant fish eggs or larvae

Active particles: demersal eggs or buoyant eggs, or fish larvae that can swim

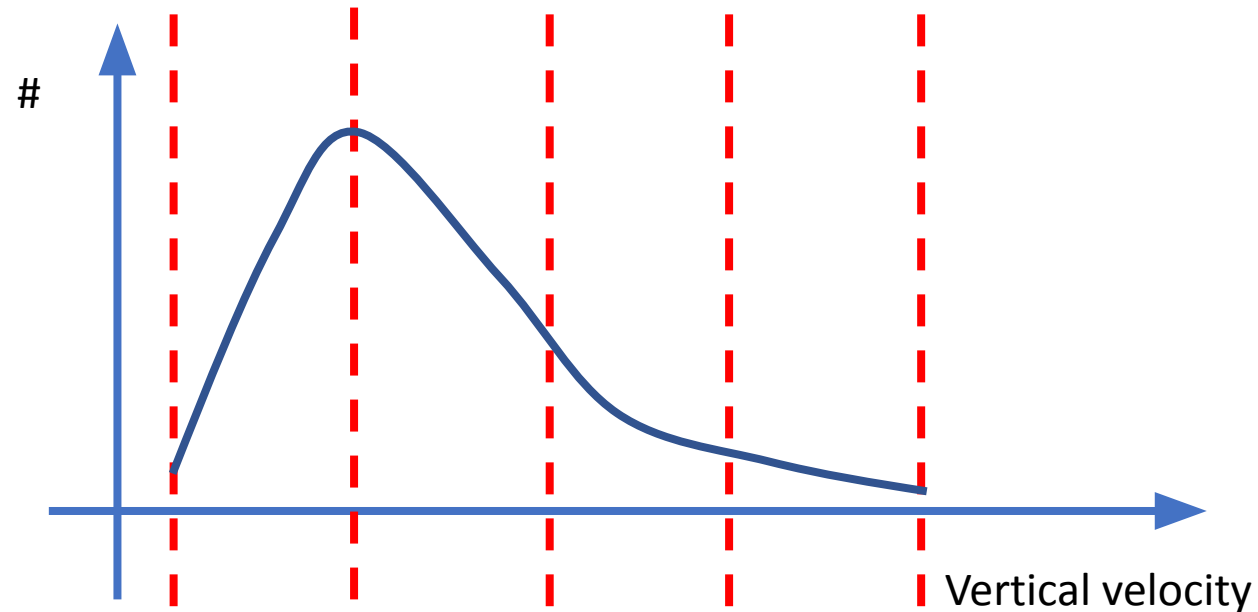


# Scenarios for fish ichthyoplankton



Table. Particles, vertical velocity, and the representatives. Upward (+); downward (-).

Particle	Vertical velocity (cm/s)		Representative
Passive	0		Neutrally buoyant eggs
Active	-1	= -860 m/d	Demersal eggs
Active	-0.3		Demersal eggs
Active	-0.1	= -86 m/d	Demersal eggs
Active	-0.01	= -8.6 m/d	Demersal eggs
Active	-0.001	= -0.86 m/d	Demersal eggs
Active	1		Larvae
Active	10		Larvae



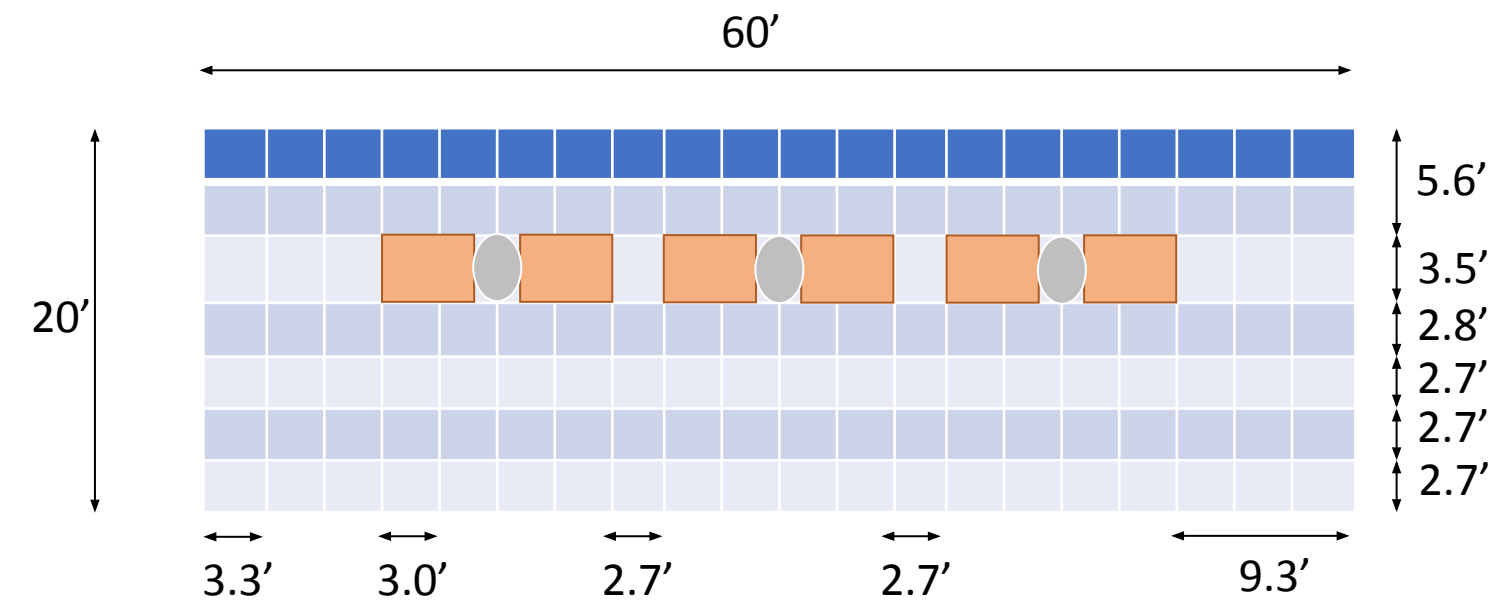

Particles are removed when they enter the area of the intake screens

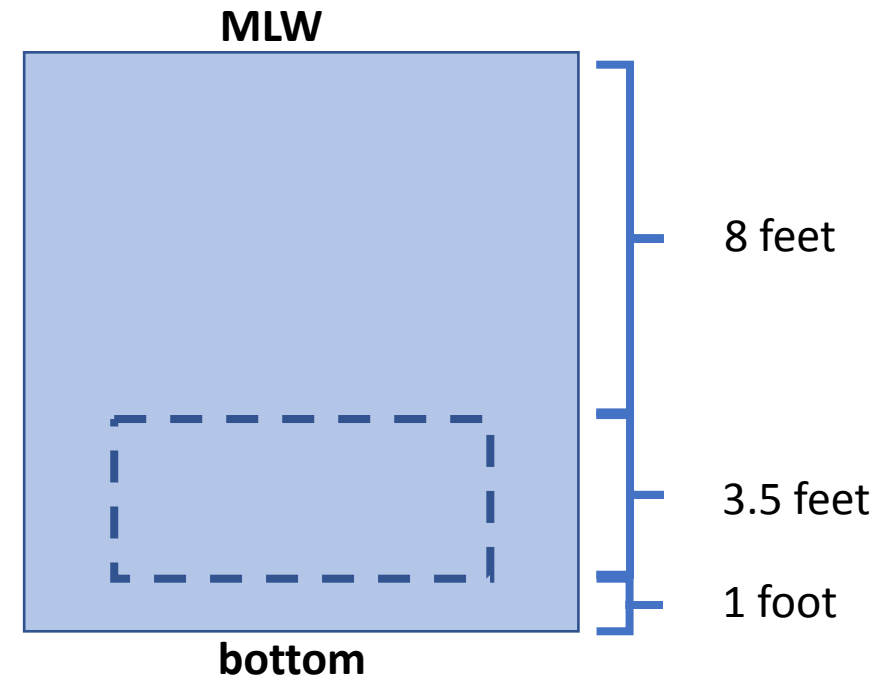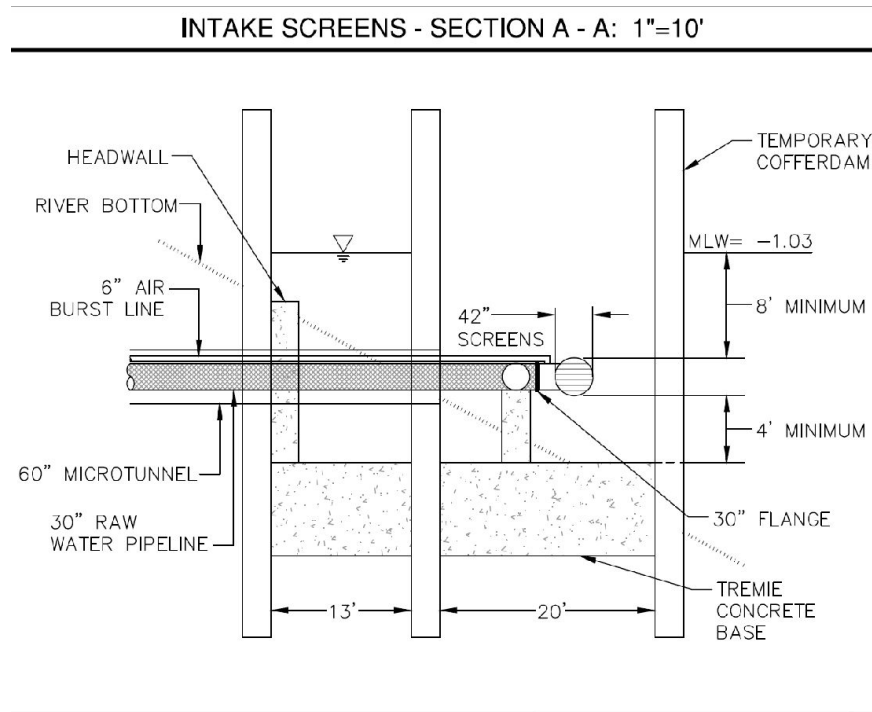

# Particle tracking scenarios

## Forward tracking scenarios

- ➡ Different locations: near, upstream, downstream the intake
- ➡ Different release methods: one-time vs. continuous
- Different flow conditions: moderate, high, low
- Different vertical velocities: passive vs. active


**Scenarios 1-5:** location and release methods

## Backward tracking scenario

# Release locations and methods


## Scenarios 1-5:

passive particles, moderate flow condition

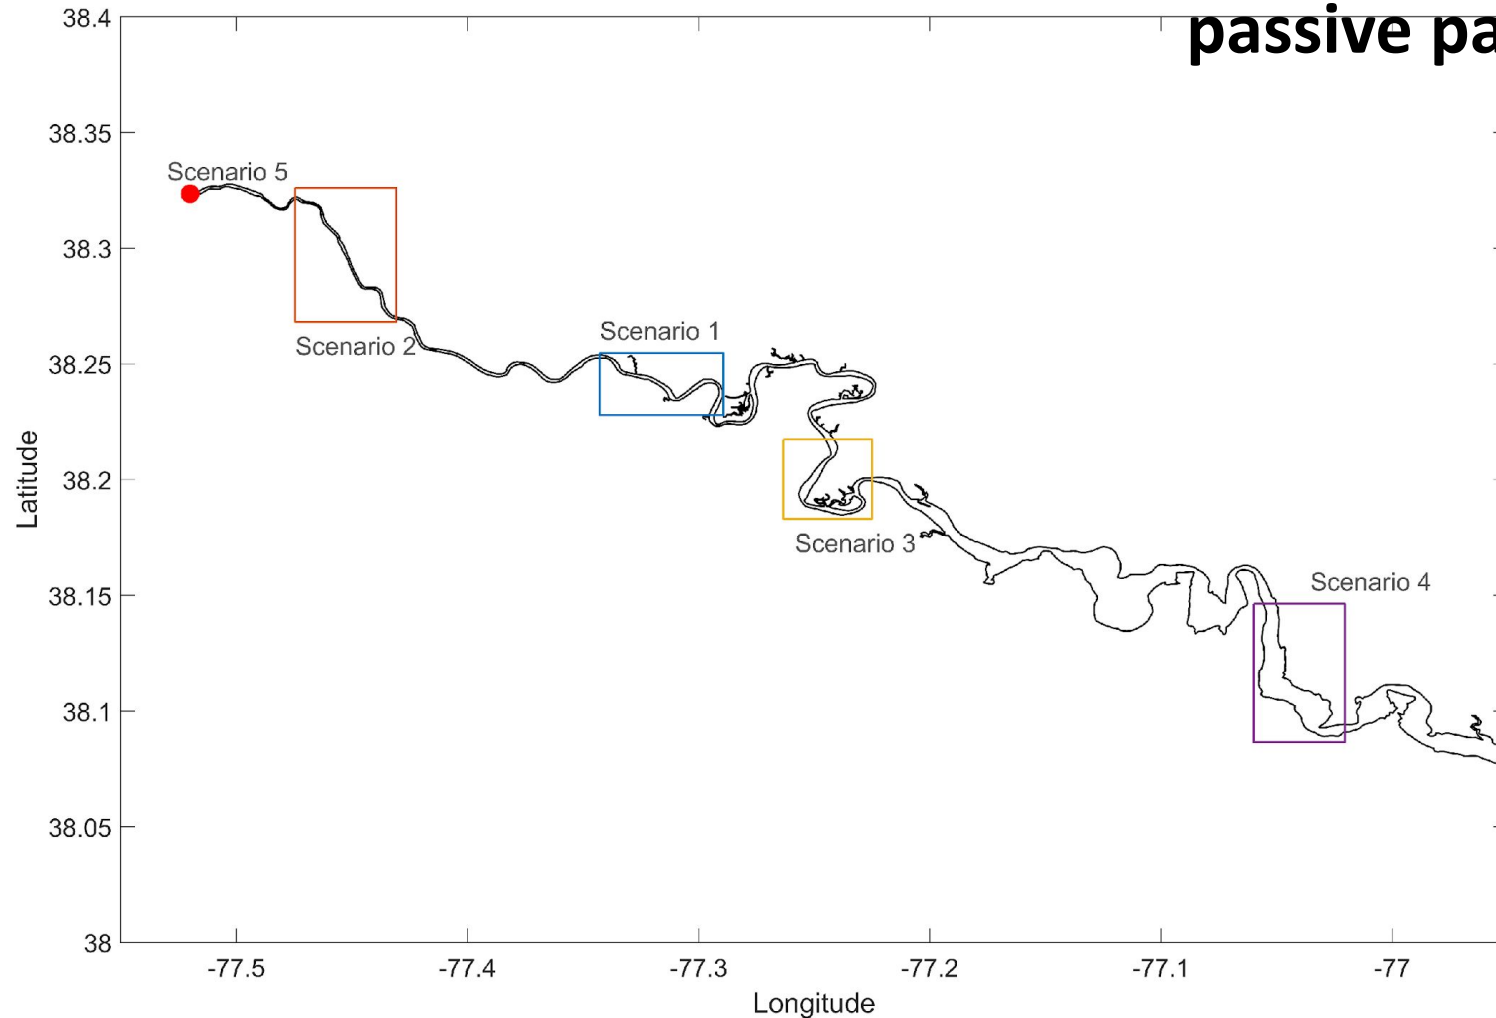

One-time release

**Scenario 1 (particle # = 10,190)**

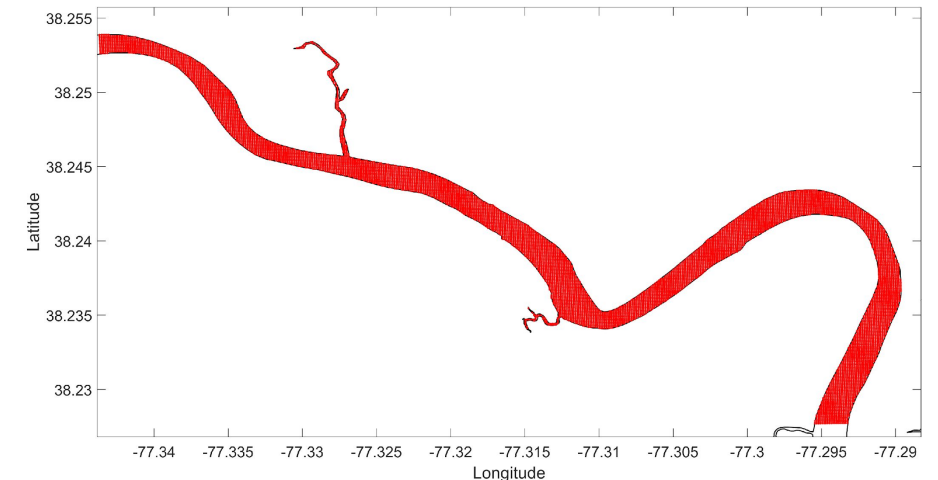





# Release locations and methods

## Scenarios 1-5:

**passive particles, moderate flow condition**



Continuous release for 21 days

**Scenario 5 (particle # = 10,001)**

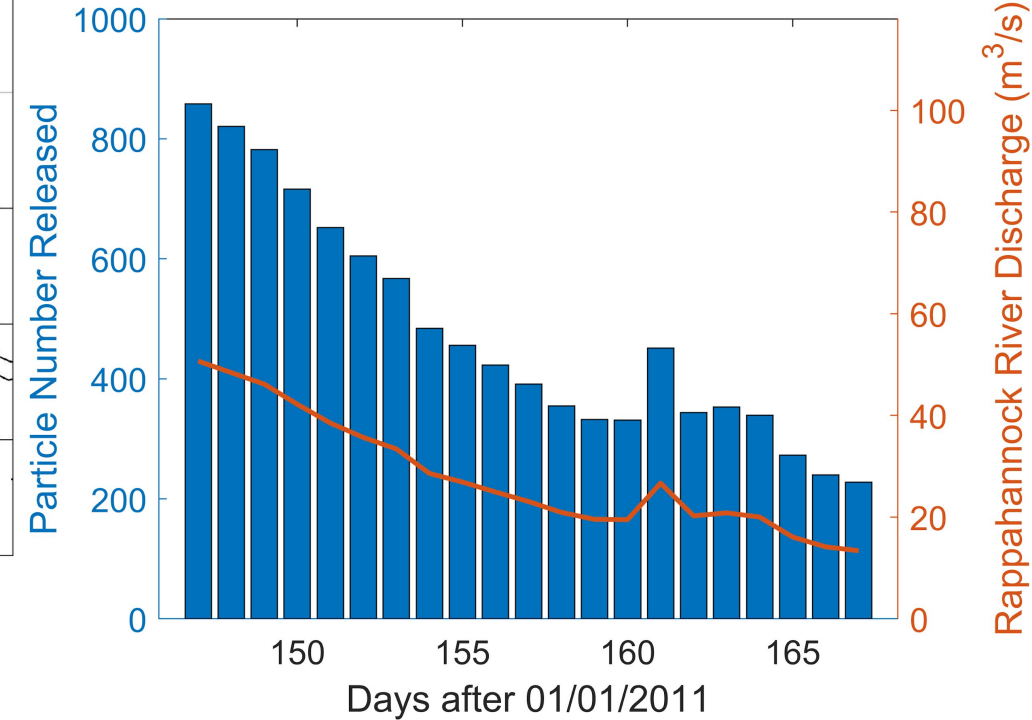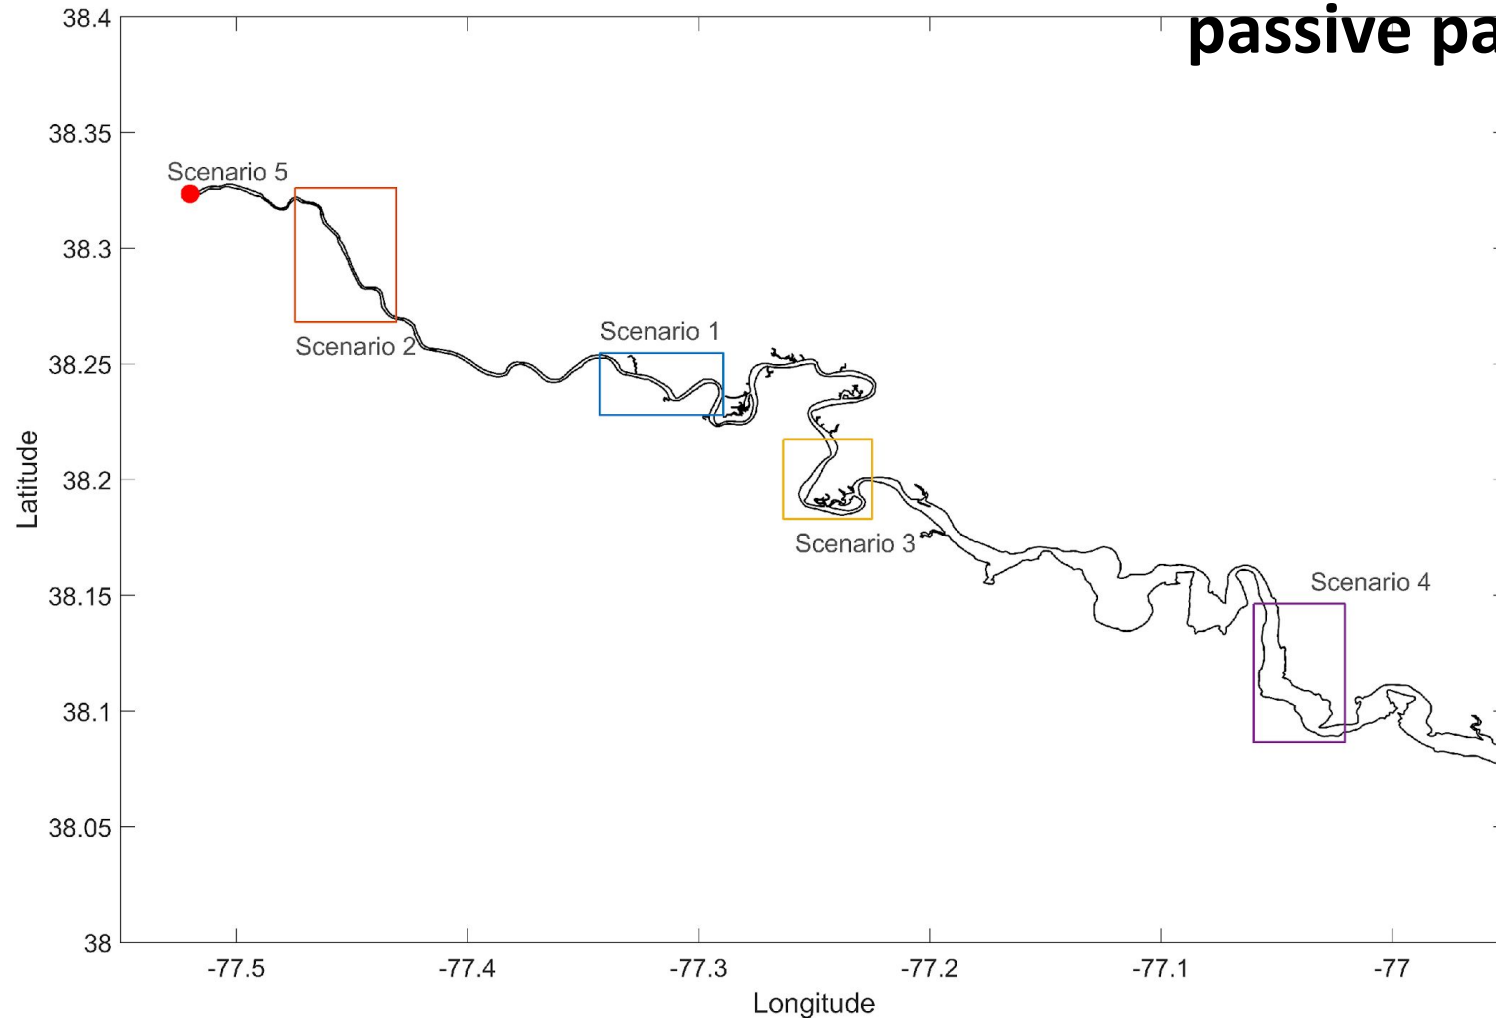



# Scenario 1

One-time release, moderate flow condition, passive particles

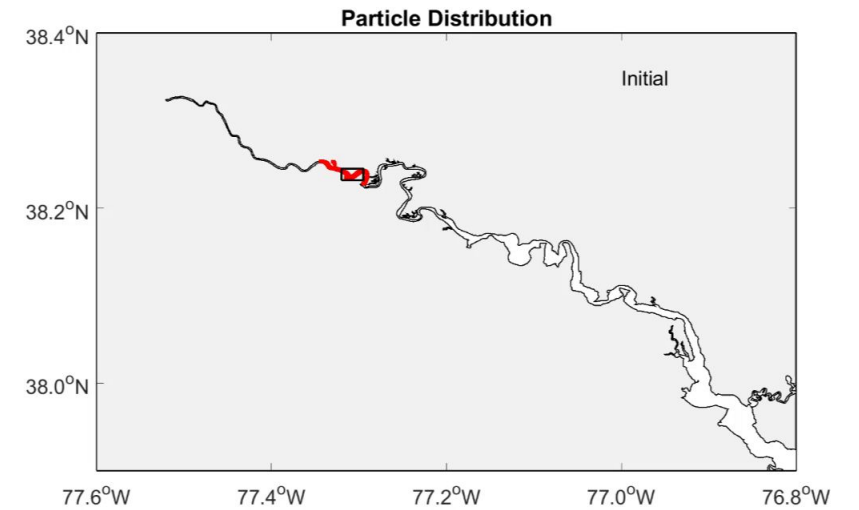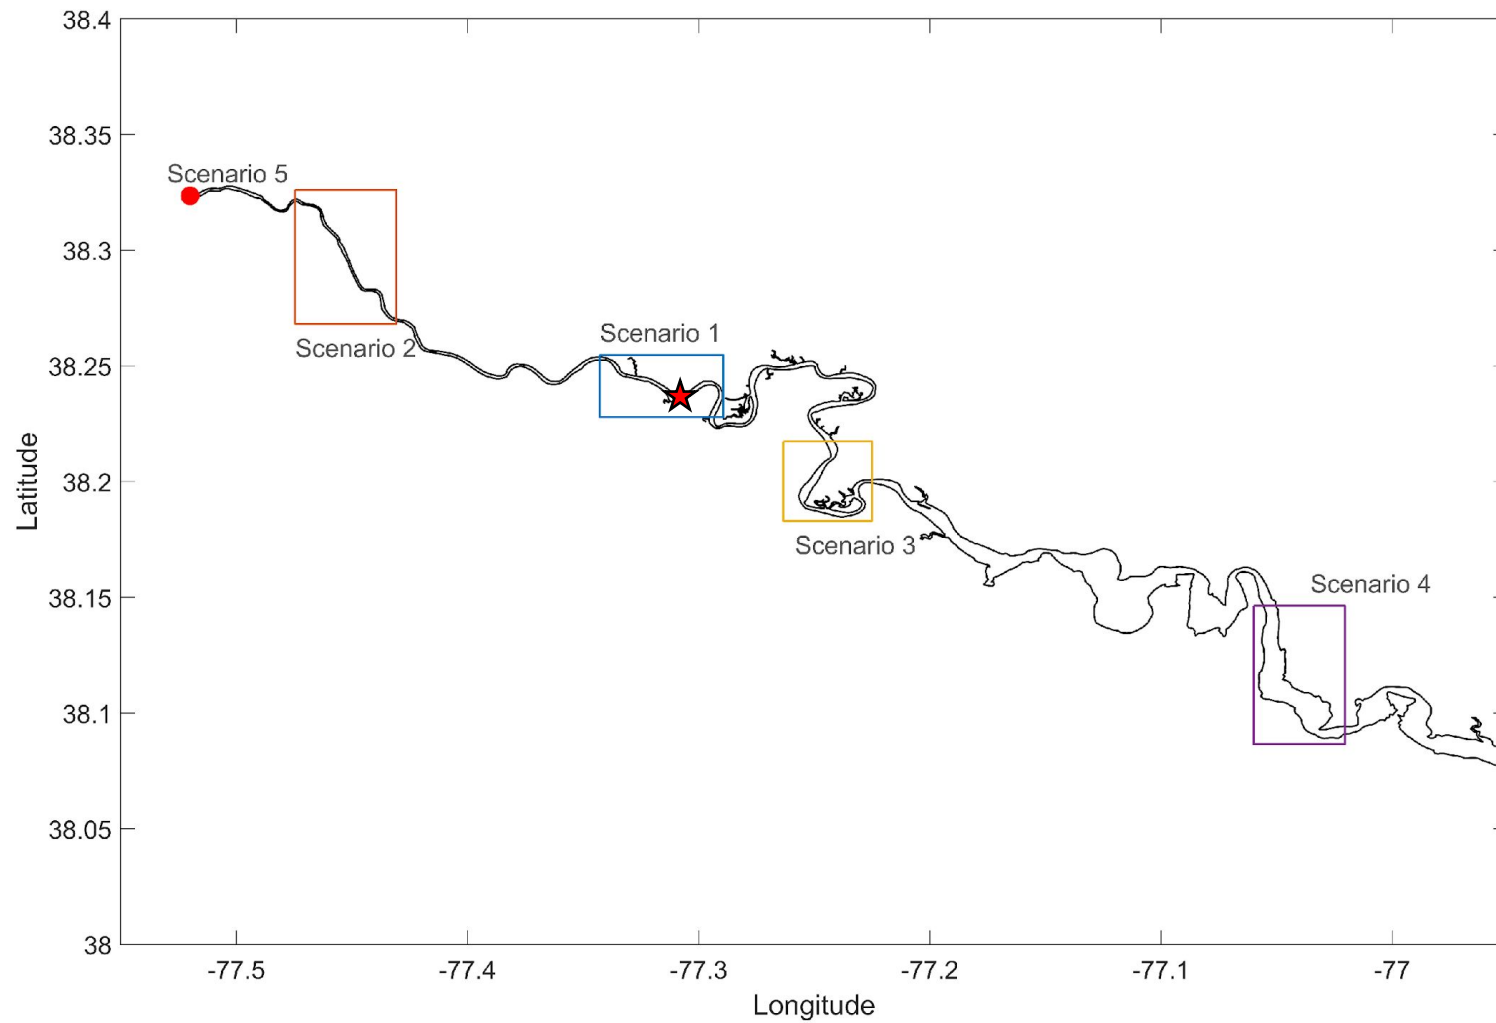

# Scenario 5




Continuous release, moderate flow condition, passive particles

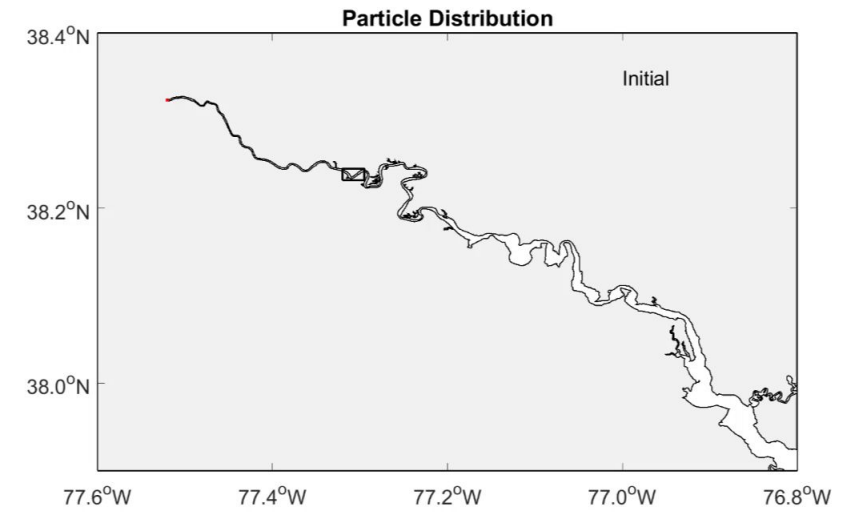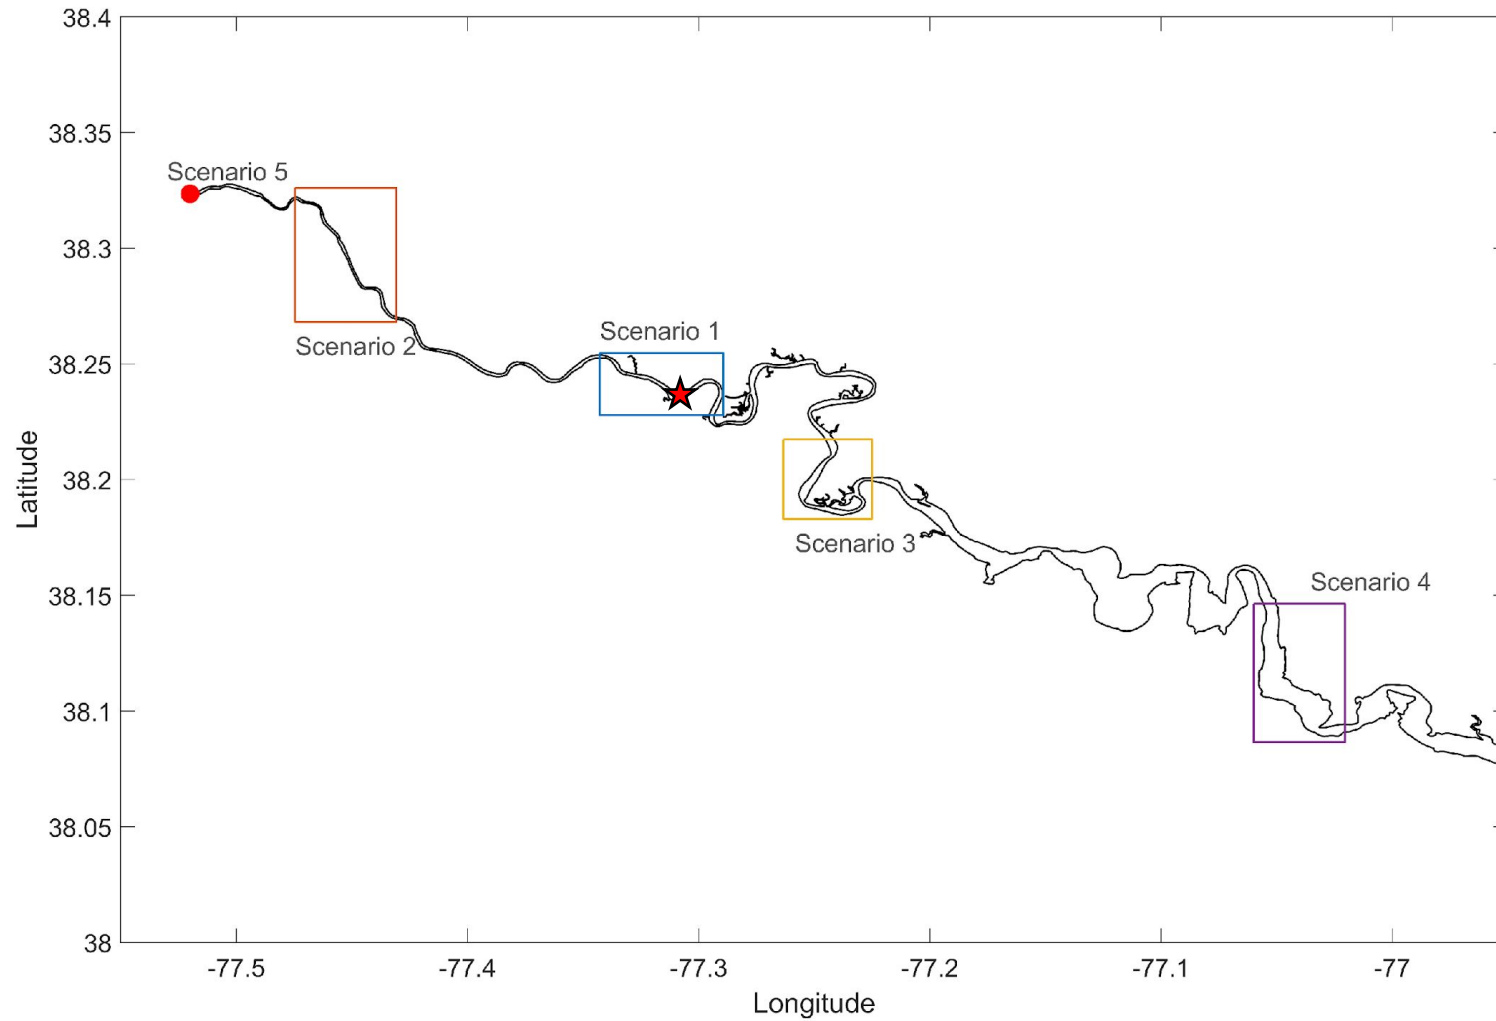

Video

# Scenario 3

One-time release, moderate flow condition, passive particles

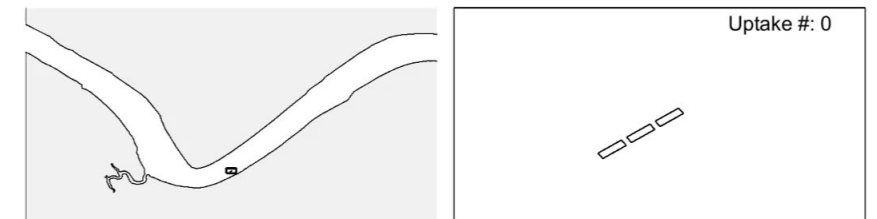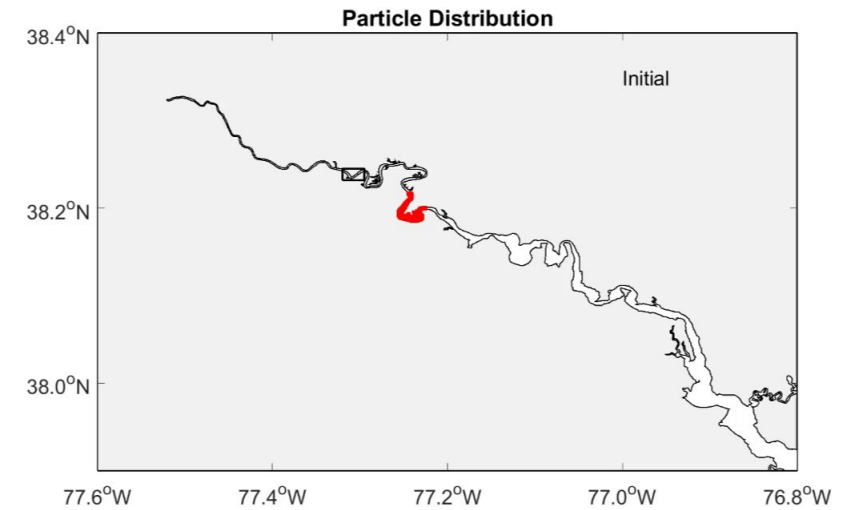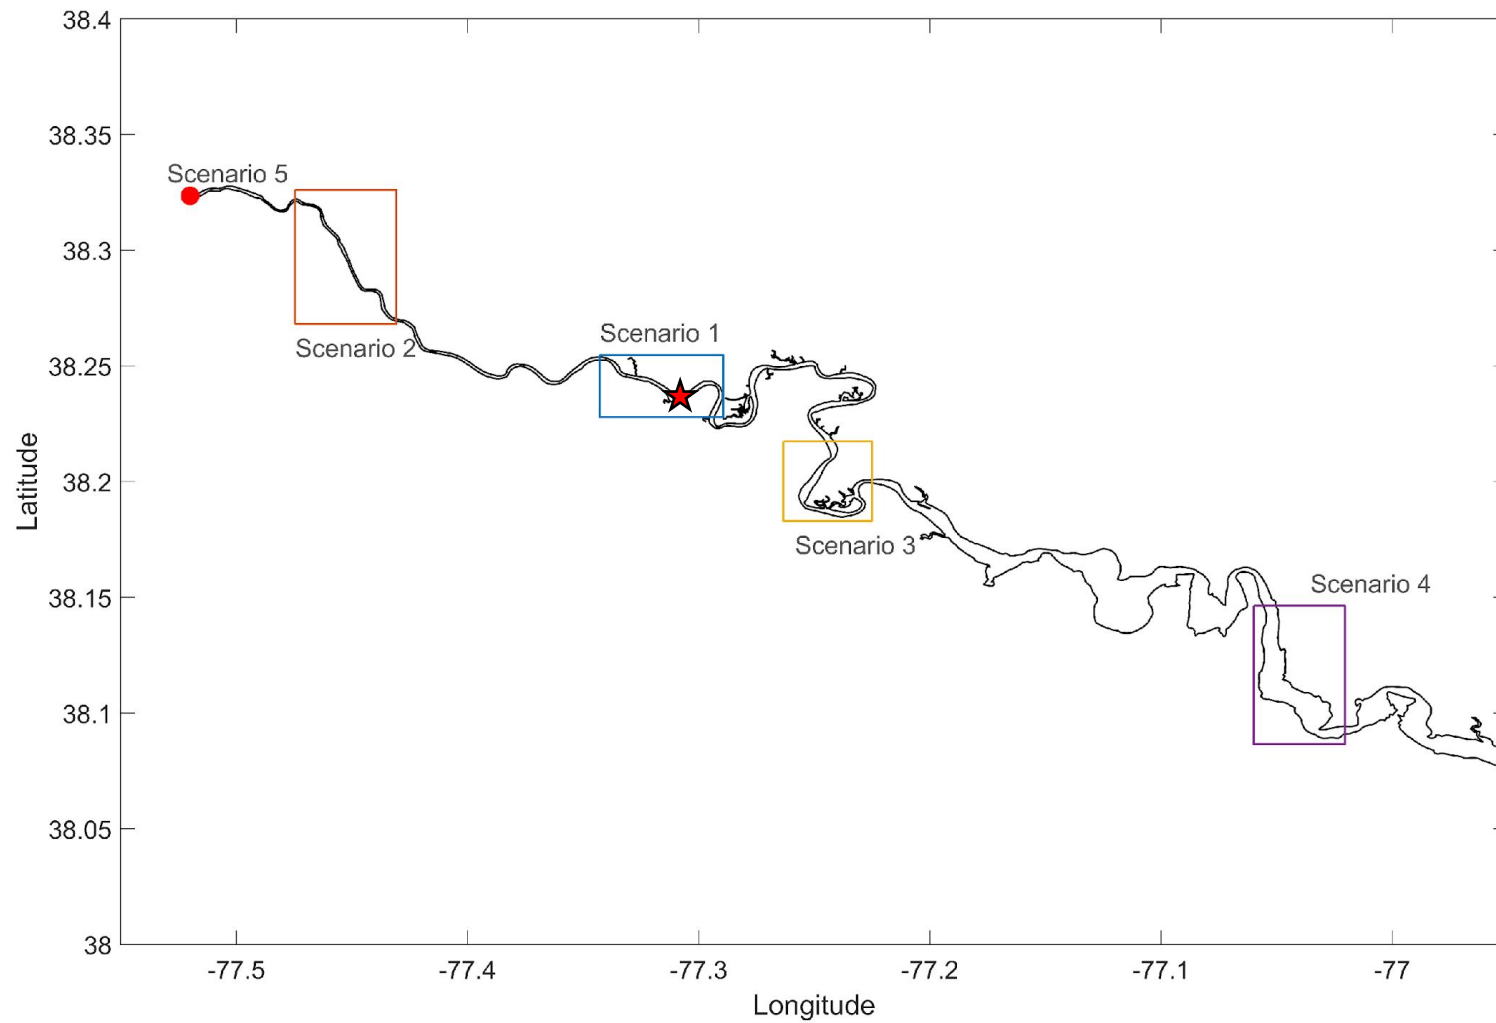

Video



# Particle tracking scenarios

## Forward tracking scenarios

Different locations: near, upstream, downstream the intake

Different release methods: one-time vs. continuous


Different flow conditions: moderate, high, low

Different vertical velocities: passive vs. active

## Backward tracking scenario


**Scenarios 1-5:** location and release methods

**Scenarios 6-13:** flow conditions

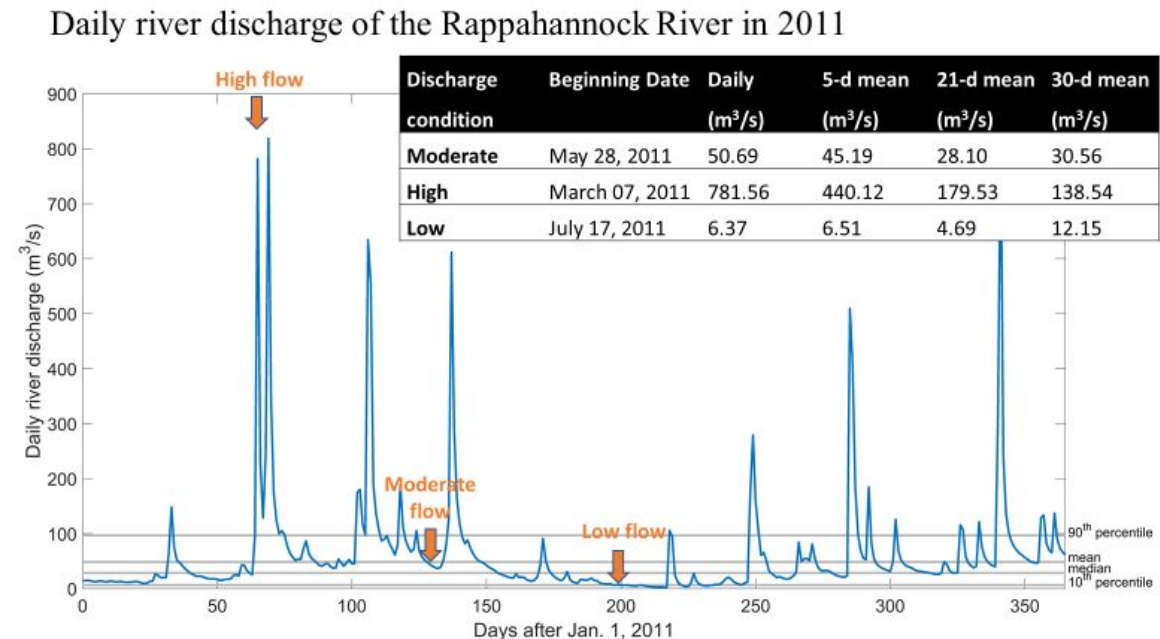


# Continuously released scenarios

High flow

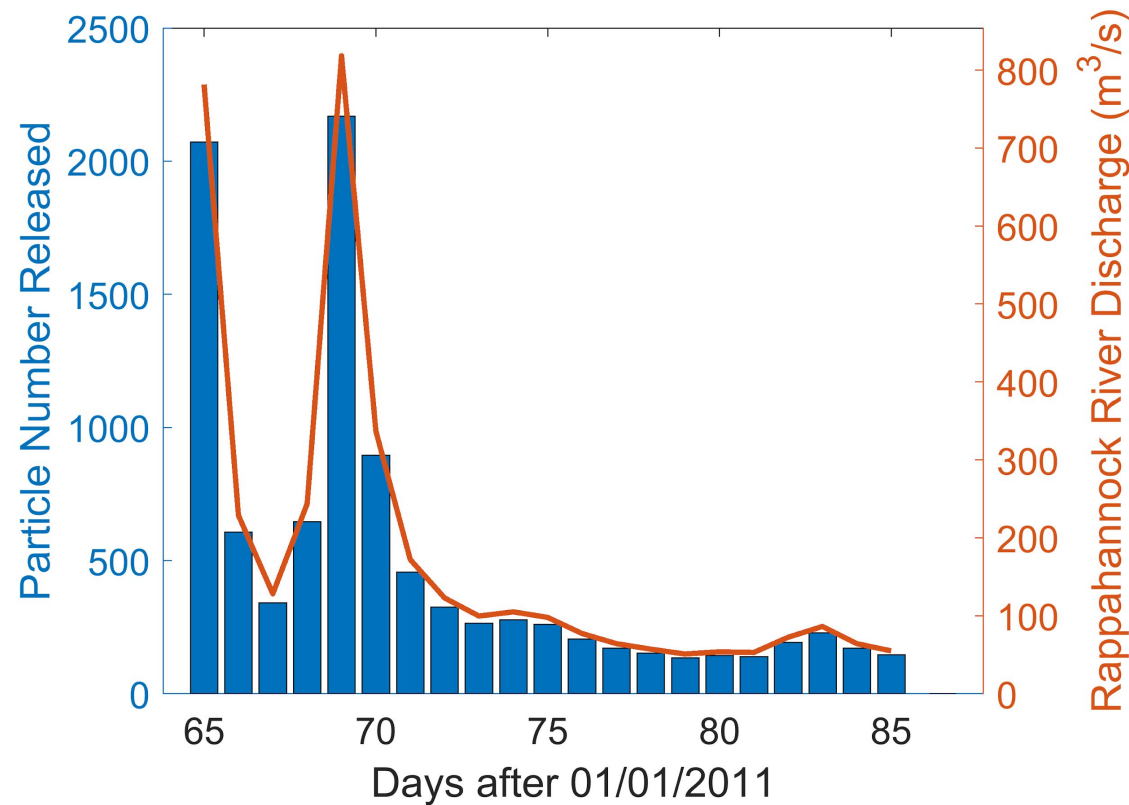

Scenario 12

Low flow

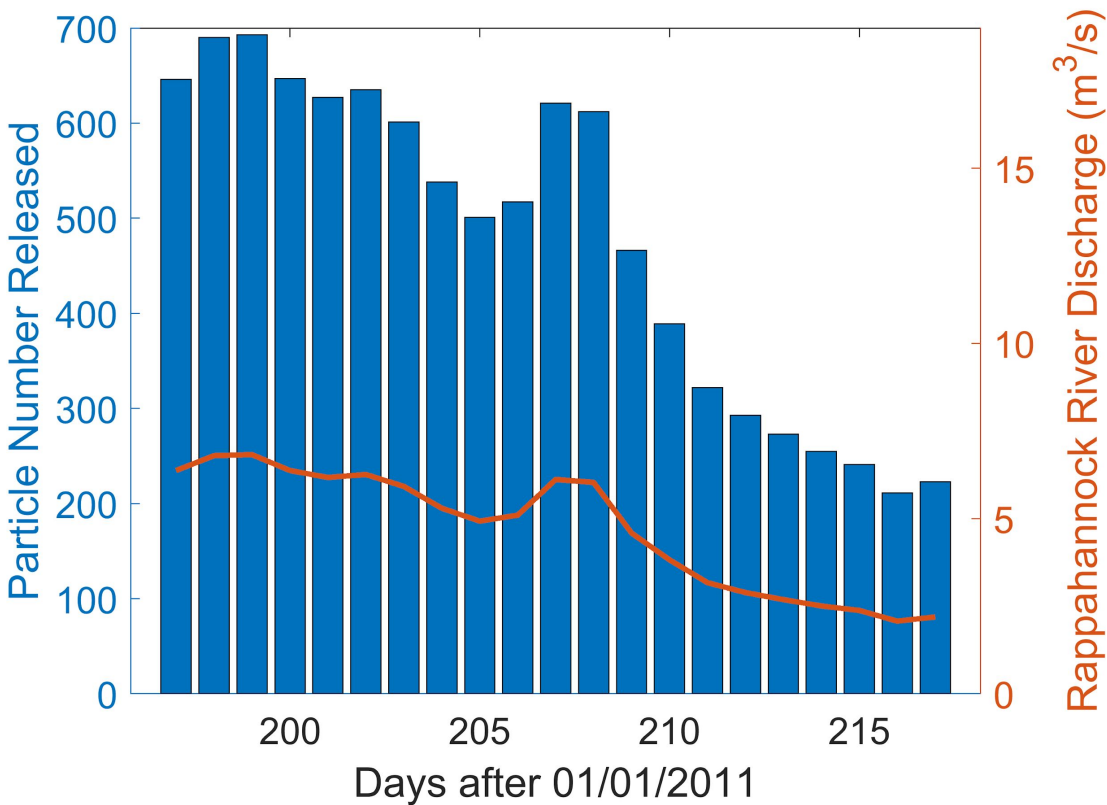

Scenario 13

# Particle tracking scenarios

## Forward tracking scenarios

Different locations: near, upstream, downstream the intake

Different release methods: one-time vs. continuous

Different flow conditions: moderate, high, low

Different vertical velocities: passive vs. active



## Backward tracking scenario

**Scenarios 1-5:** location and release methods

**Scenarios 6-13:** flow conditions

**Scenarios 14-34:** vertical velocities

## Particle tracking scenarios

## Number of released particles?

**~10,000 and also 10-fold scenarios**

### Forward tracking scenarios

Different locations: near, upstream, downstream the intake

Different release methods: one-time vs. continuous

Different flow conditions: moderate, high, low

Different vertical velocities: passive vs. active


**Scenarios 1-5:** location and release methods

**Scenarios 6-13:** flow conditions


**Scenarios 14-34:** vertical velocities

### Backward tracking scenario


# Moderate flow

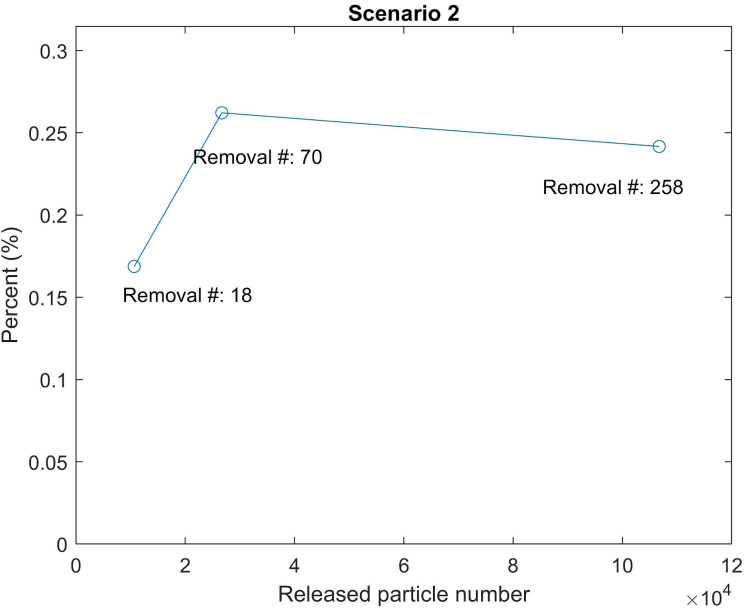

# High flow

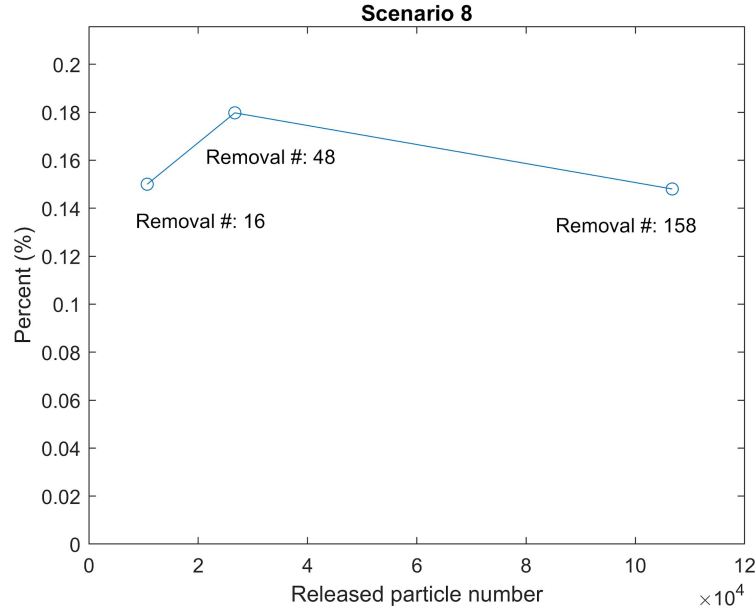


# Low flow

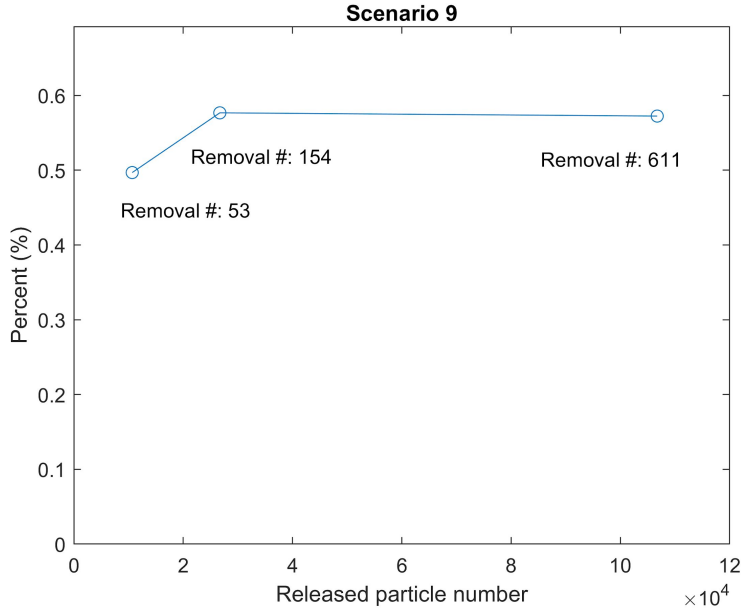



# Results of forward tracking scenarios

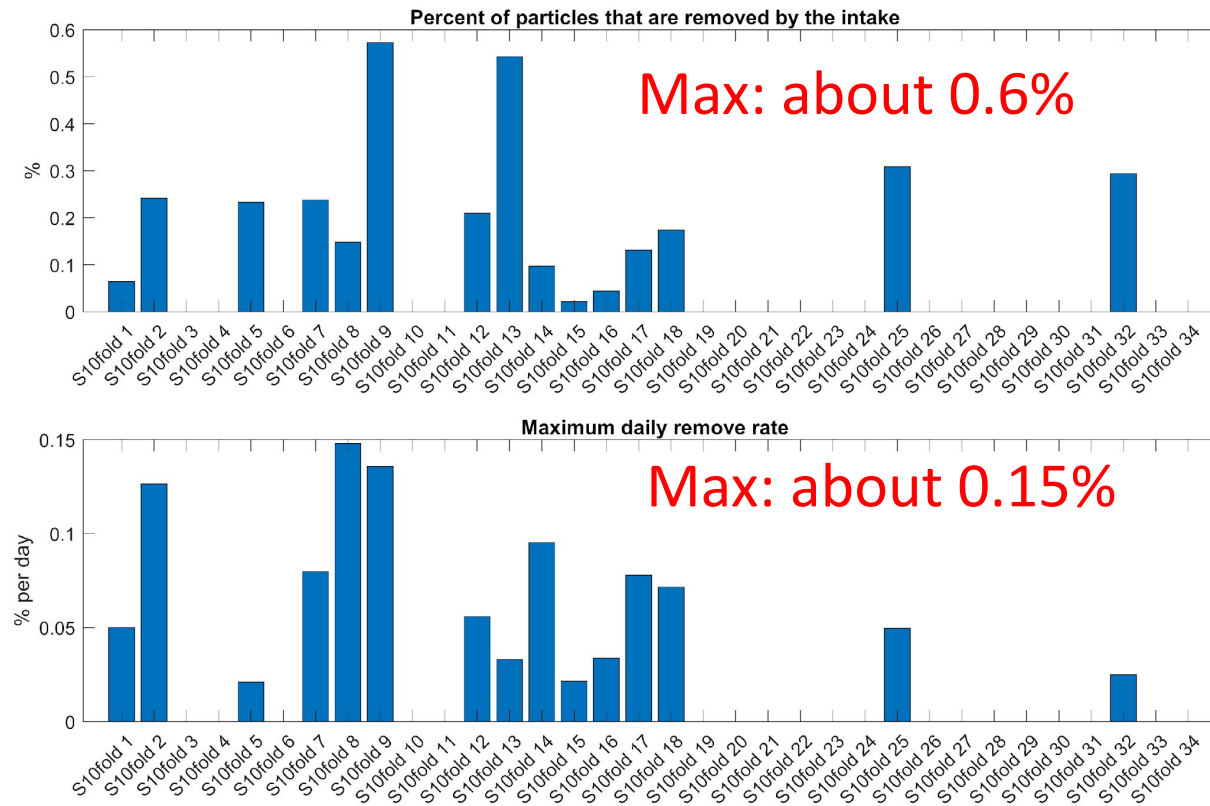

Particle #: about 100,000