

Nitrogen, Phosphorus, and Suspended Sediment:

Loads and Trends Measured from the Chesapeake Bay Nontidal Monitoring Network (NTN)

An update through water year 2023

February 26th, 2025

Jimmy Webber, jwebber@usgs.gov


Chris Mason, camason@usgs.gov

James Colgin, jcolgin@usgs.gov

Alex Soroka, asoroka@usgs.gov

NTN loads and trends were recently computed using monitoring data through water-year 2023.

The overall objective of this presentation is to summarize the new load and trend results.

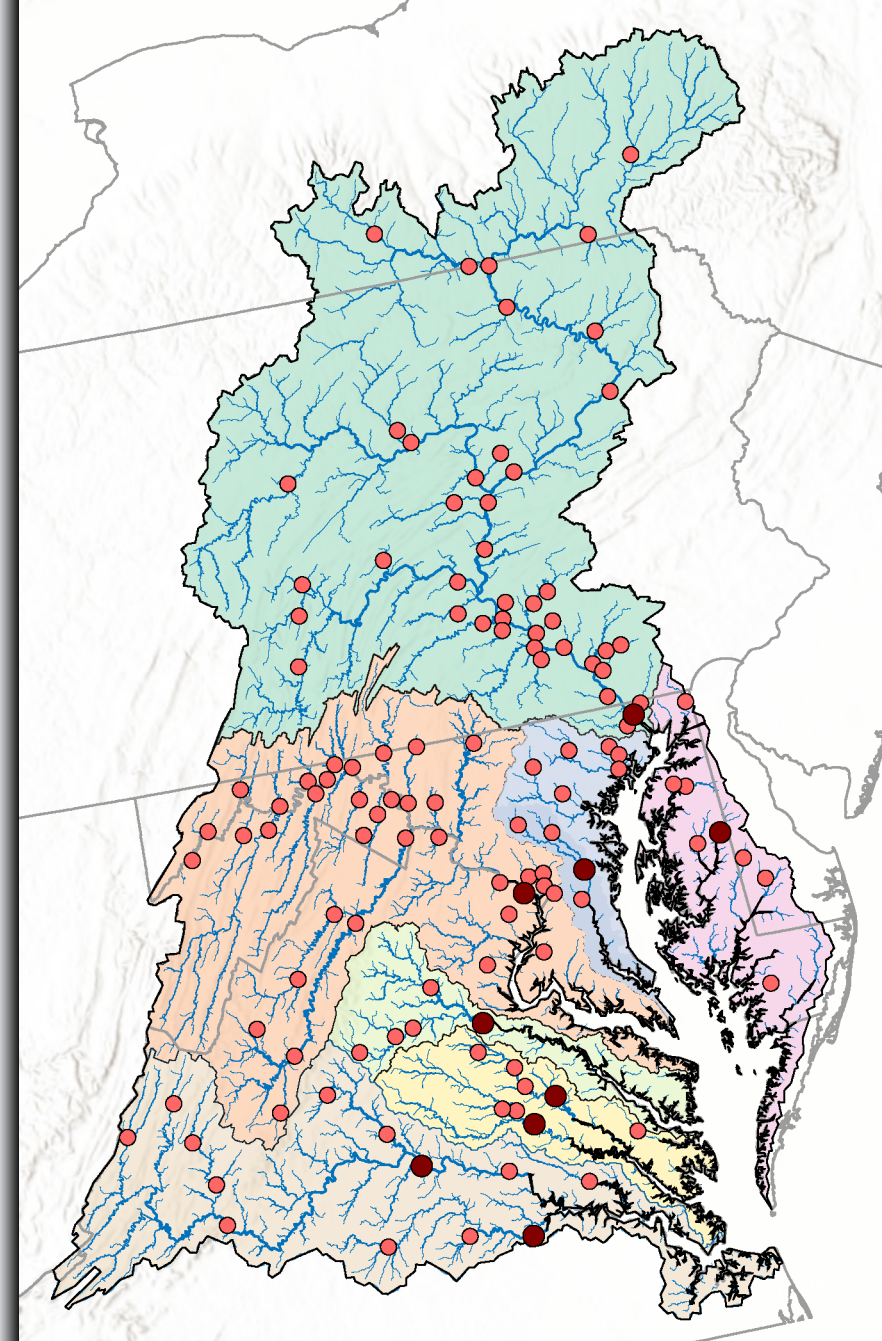


Nitrogen, Phosphorus, and Suspended Sediment:

Loads and Trends Measured from the Chesapeake Bay Nontidal Monitoring Network (NTN)

An update through water year 2023

February 26th, 2025

1. Major Messages
2. Monitoring Network and Methods
3. Streamflow and Per-Acre Loads (Yields)
4. Nutrient and Sediment Trends
5. Resources to Learn More

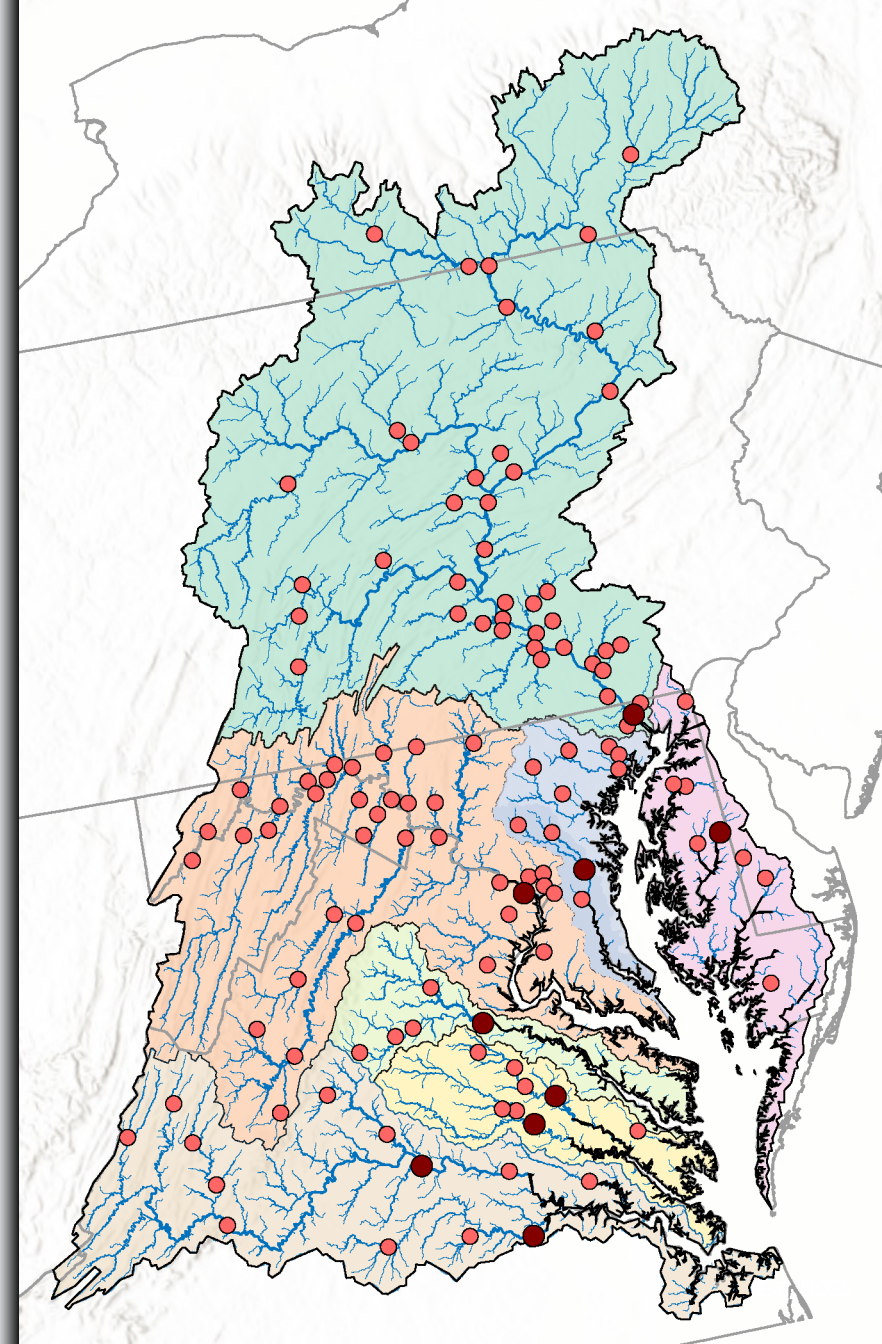

A black and white photograph of a person in a high-visibility vest and cap operating a water sampling device mounted on a trailer. The device has a large spool and a vertical pole. The person is standing on a concrete bridge deck, and the device is positioned over a river. A traffic cone is visible on the ground near the device. The background shows a river flowing through a wooded area.


Major Messages

Major Messages: NTN Loads and Trends

1. Loads and trends have been calculated through water year 2023 using reproducible and accurate water-quality datasets.
The quality of NTN data has never been better.
2. Per-acre nutrient and sediment loads are typically highest in agricultural and/or urban watersheds.
3. Most long-term trends¹ of total nitrogen (n=43) and total phosphorus (n=16) ***improved***.
4. The combined amounts of nitrogen, phosphorus, and sediment from NTN stations nearest the Bay all ***decreased*** since 2014.
5. Improving short-term trends (2014 – 2023) of total nitrogen, total phosphorus, and suspended sediment were detected at less than half of all stations.
6. The USGS will continue to work with Chesapeake Bay partners to evaluate and explain these observed water-quality patterns.



Visit our website to explore these results in more detail:
usgs.gov/CB-wq-loads-trends

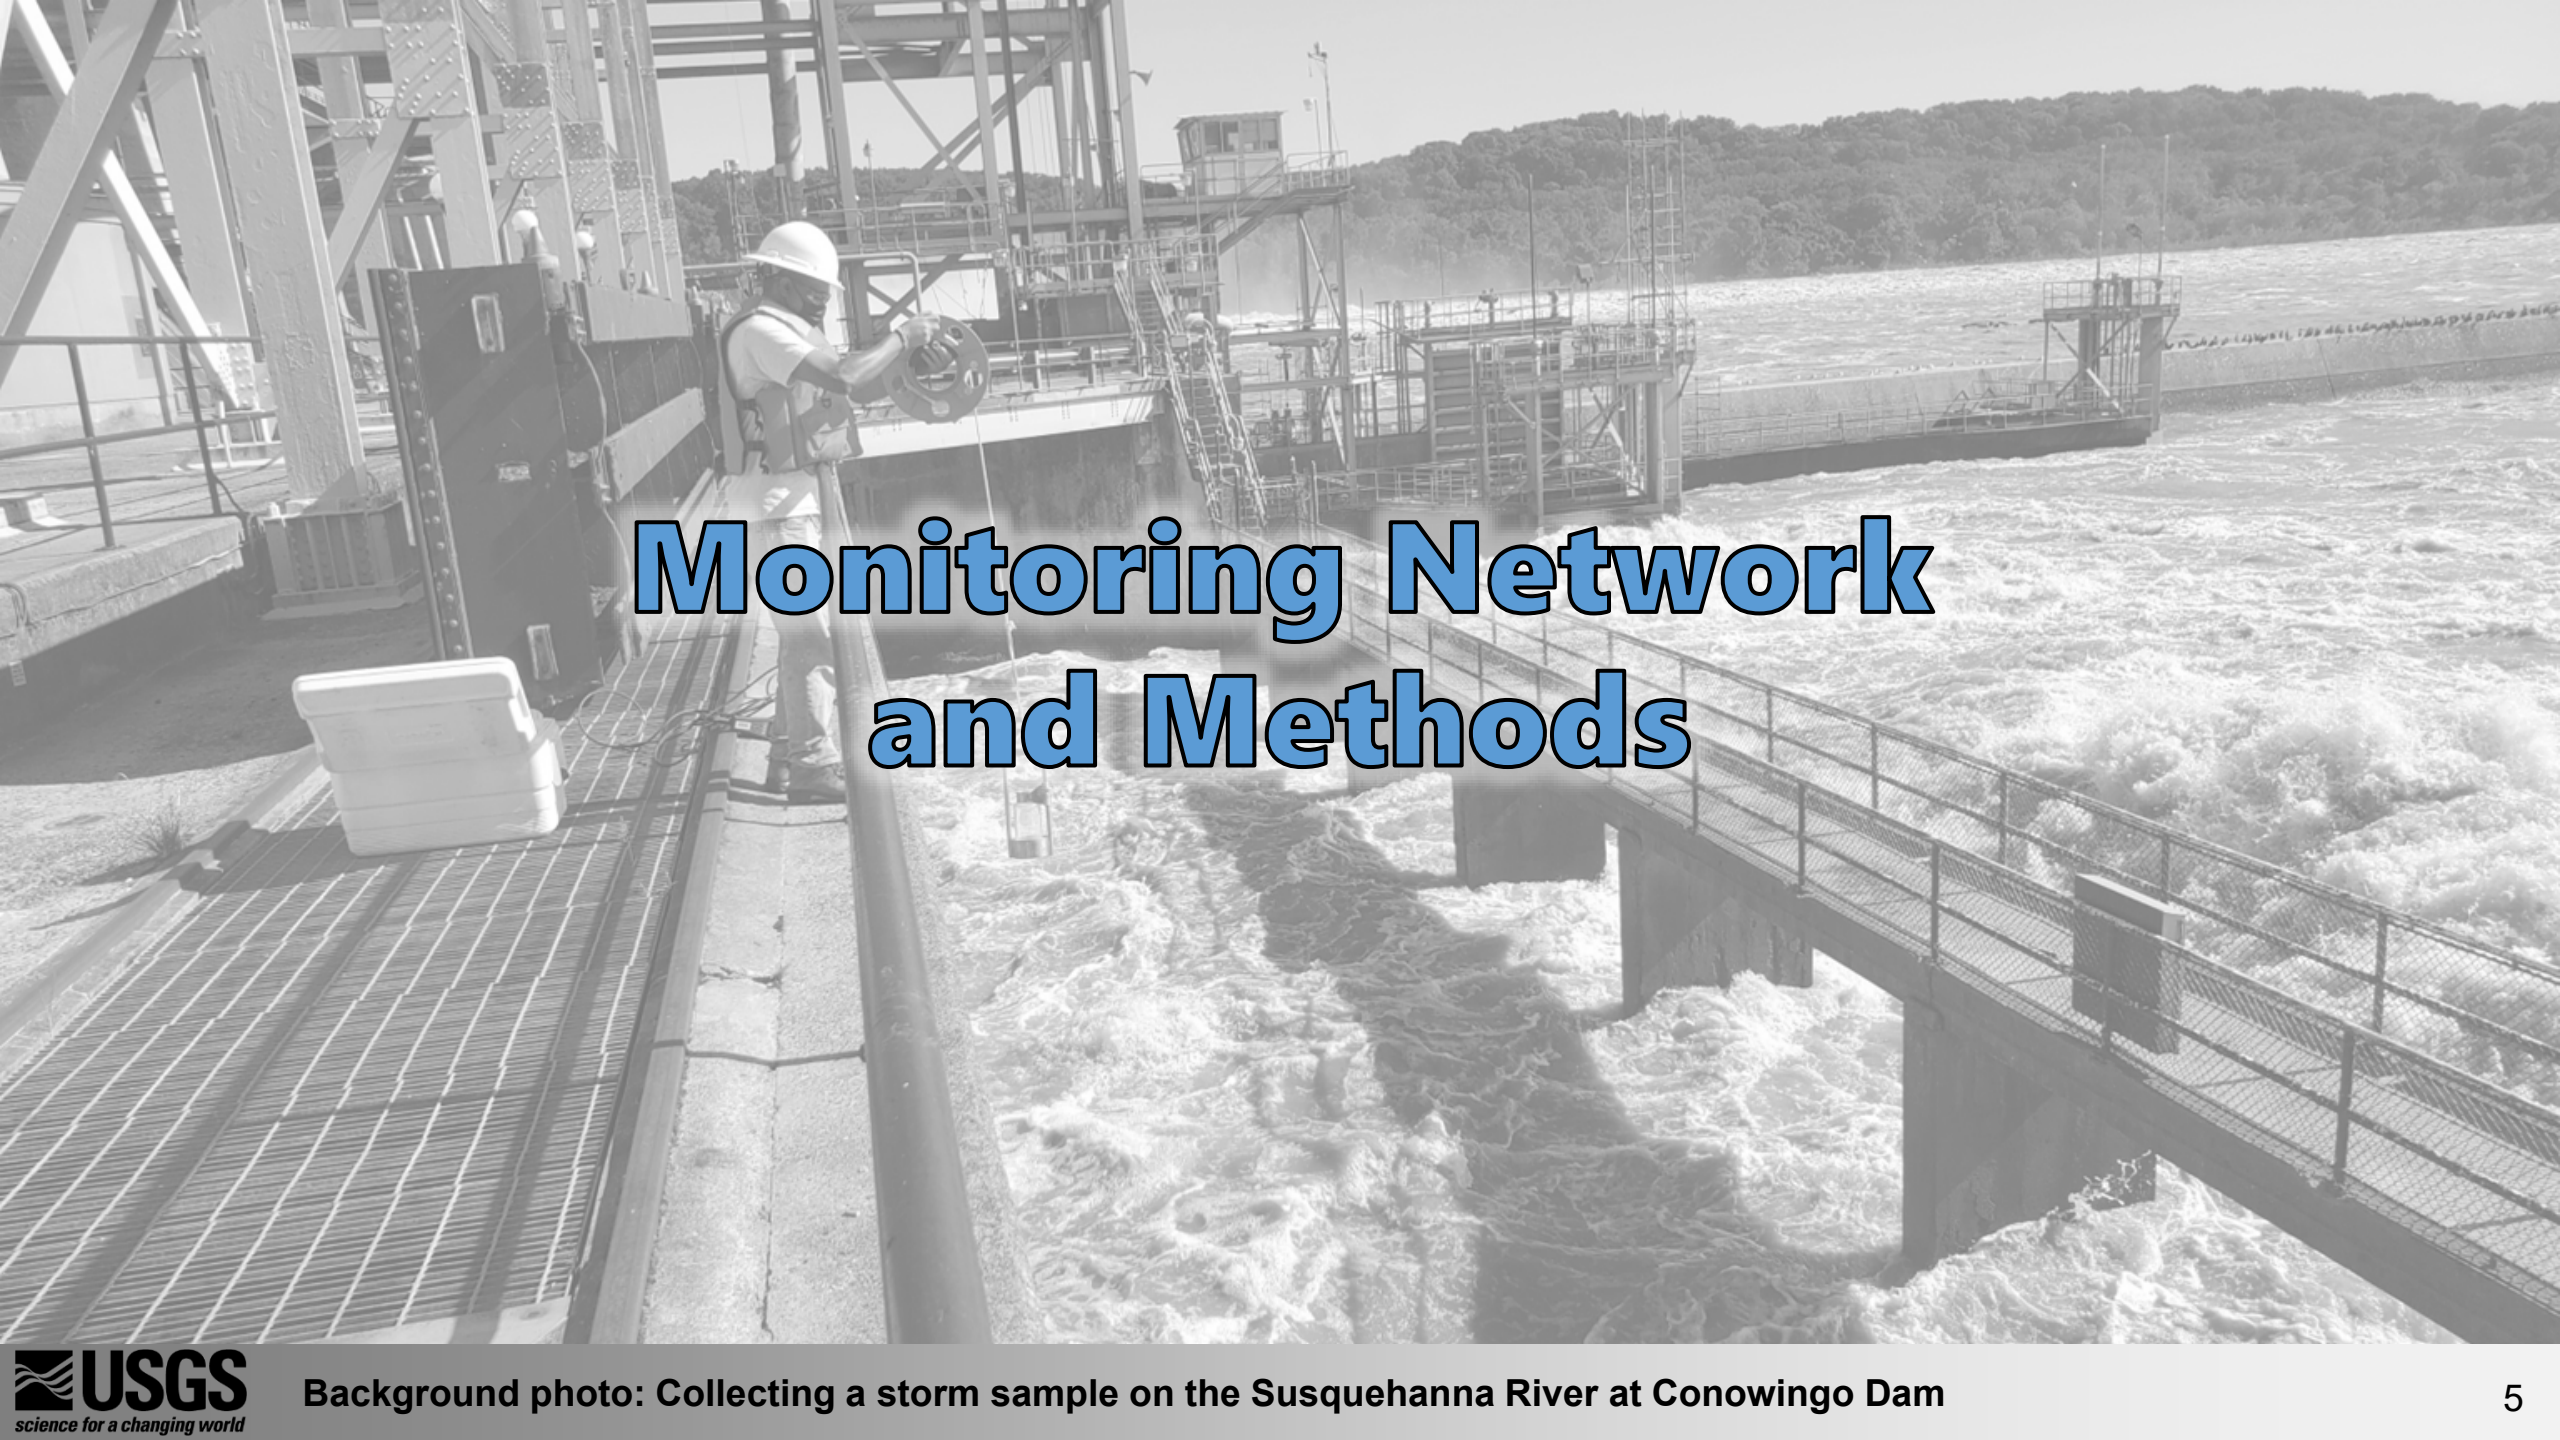

Monitoring Network and Methods

Monitoring data are used to compute water-quality load and trends

NTN monitoring data are collected at 123 stations by the US Geological Survey (USGS), state agencies, and other partners throughout the watershed.

Daily streamflow is measured at all stations.

Monthly water-quality samples are collected at all stations.

Storm-targeted water-quality samples are collected at most stations.



Number of Stations by River Basin

- Susquehanna.....42
- Potomac.....37
- Eastern Shore.....8
- MD Western Shore....10
- Rapp. / York / James..26


Loads and trends are computed for five water-quality parameters using WRTDS¹:

- Total nitrogen (TN)
- Nitrate + nitrite (NOx)
- Total phosphorus (TP)
- Orthophosphate (PO4)
- Suspended sediment (SS)

- **Loads** are computed for 122 stations.
- **Short-term trends**² are computed for 120 stations³.

31 stations have a trend reported for the first time!
- **Long-term trends**⁴ are computed for 43 stations.

- Monitoring station
- Station with a trend reported for the first time

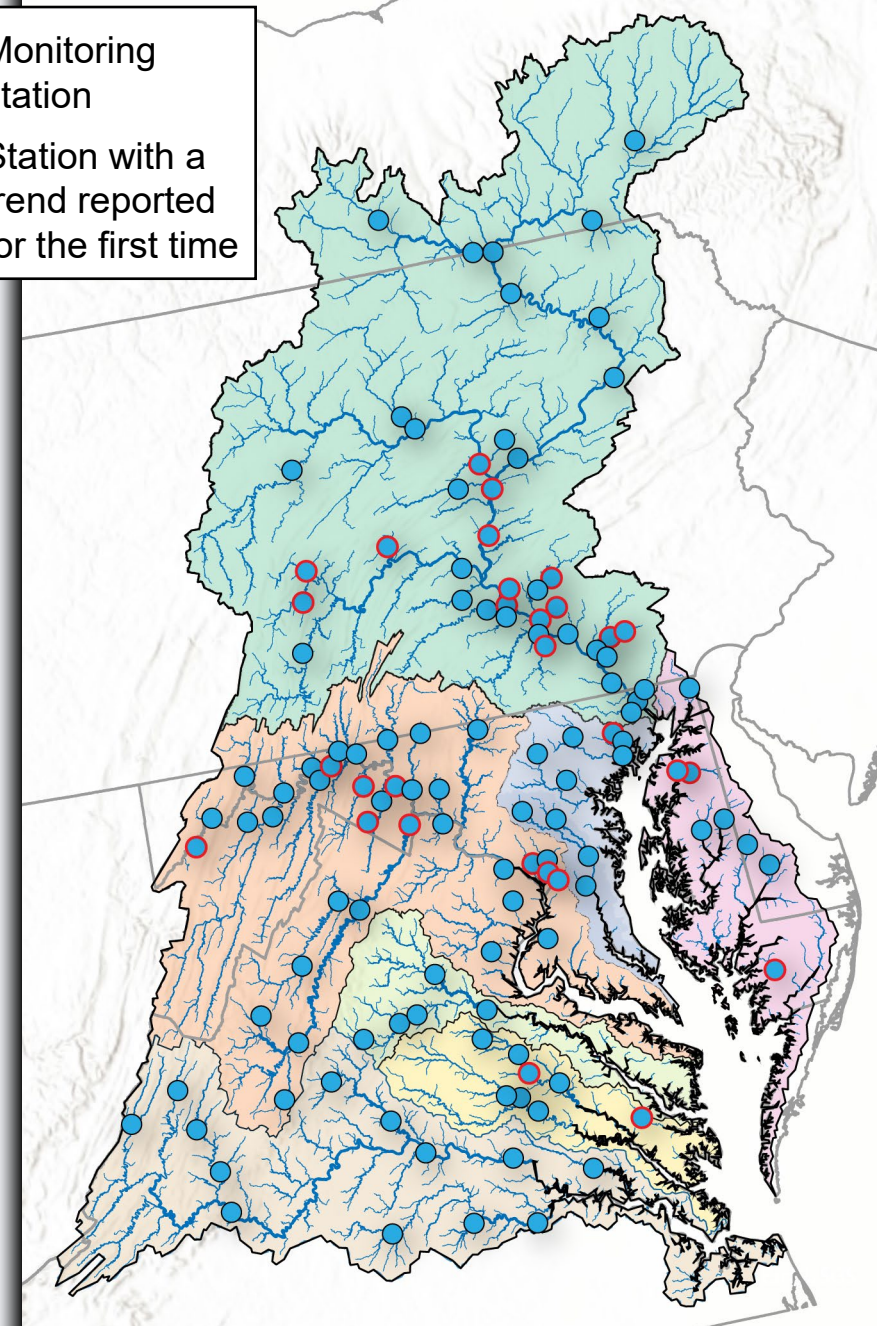


A reproducible set of water-quality samples was built from publicly accessible databases to compute load and trend results

Previous NTN results were computed from a static table of water-quality sample data. With each NTN update, we appended new sample results to the static table.

↳ That process worked well, but it was difficult to verify historical sample results.

For this NTN update, we rebuilt the water-quality sample dataset using two publicly accessible databases: (1) the Water-Quality Portal and (2) the Chesapeake Data Hub.

We used these databases to create a **reproducible** and **accurate** set of sample data to compute NTN loads and trends¹.

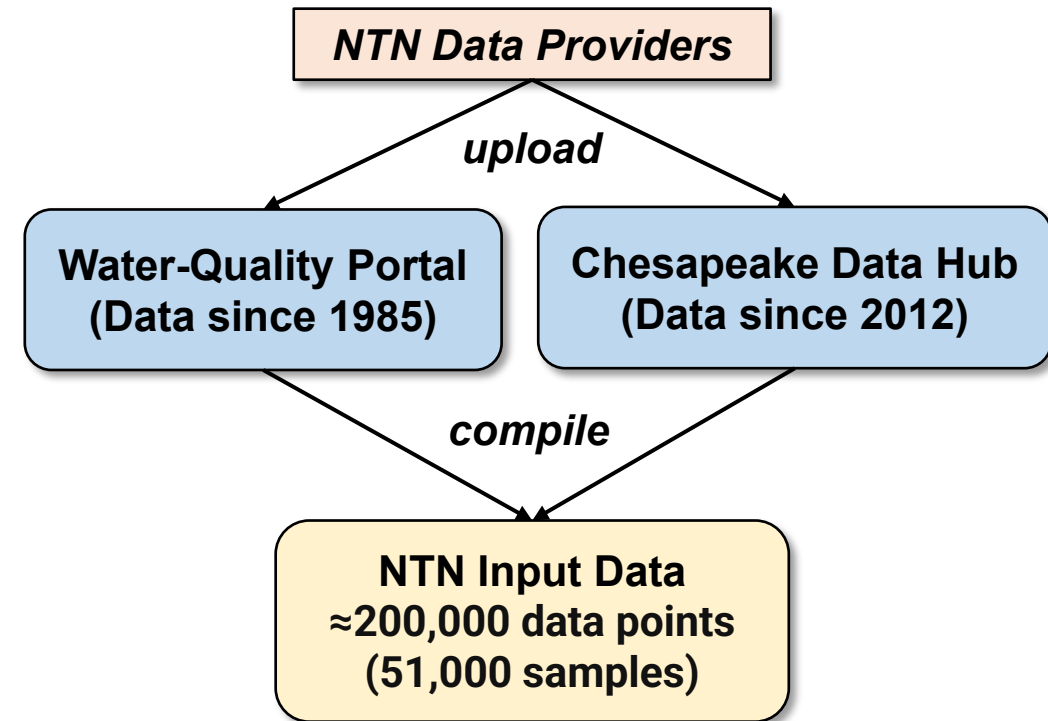

Is 51,000 samples a lot?

It is an average of about 3.5 NTN samples collected **every day** since 1985!

The updated input data compared very well to our previous dataset


Compared to sample data used previously to compute NTN load and trends (1985 – 2020):

- We found and verified the vast majority of historical sample values in public databases.
- We found previously unused samples in public databases, which increased the total number of samples used to compute loads and trends.

Would the updated input data have changed the previously published NTN load and trend results?


We recomputed NTN trends from 2011 – 2020 using the updated input dataset.

➔ Of more than 300 trend results, **only two trends** from 2011 through 2020 would have changed direction using the updated input dataset¹.

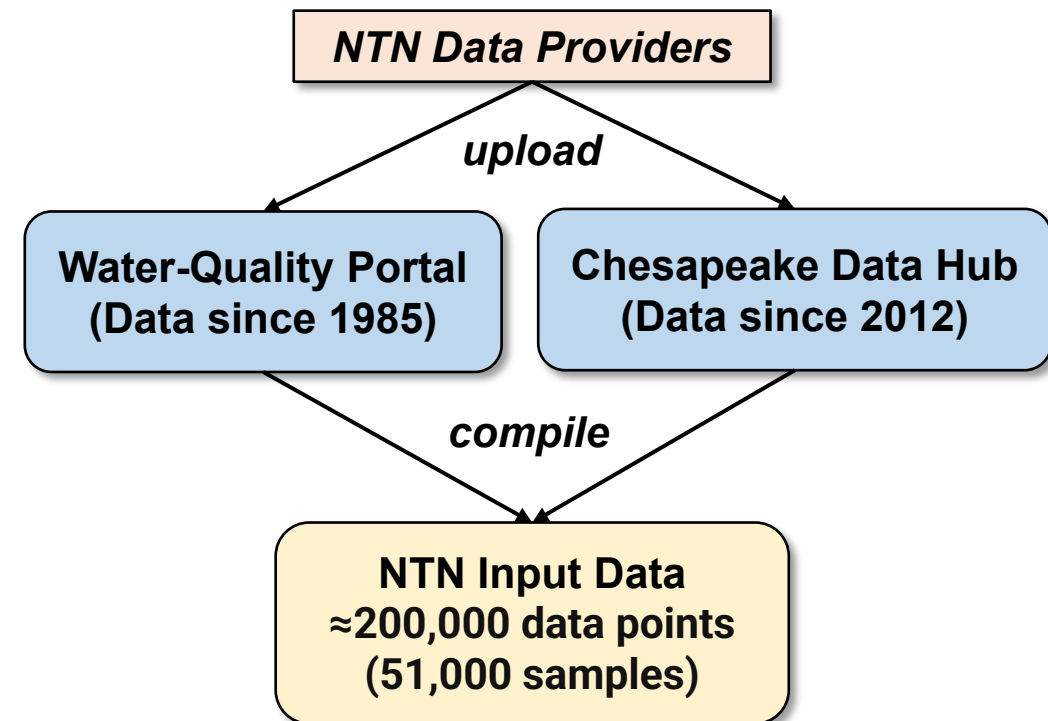

Is 51,000 samples a lot?


It is an average of about 3.5 NTN samples collected **every day** since 1985!



Streamflow and Per-Acre Loads (Yields)

Streamflow has a large effect on water-quality loads

The estimated annual-mean streamflow entering the Bay¹ in water year 2023 was about **17% less** than the 1937 – 2023 average.

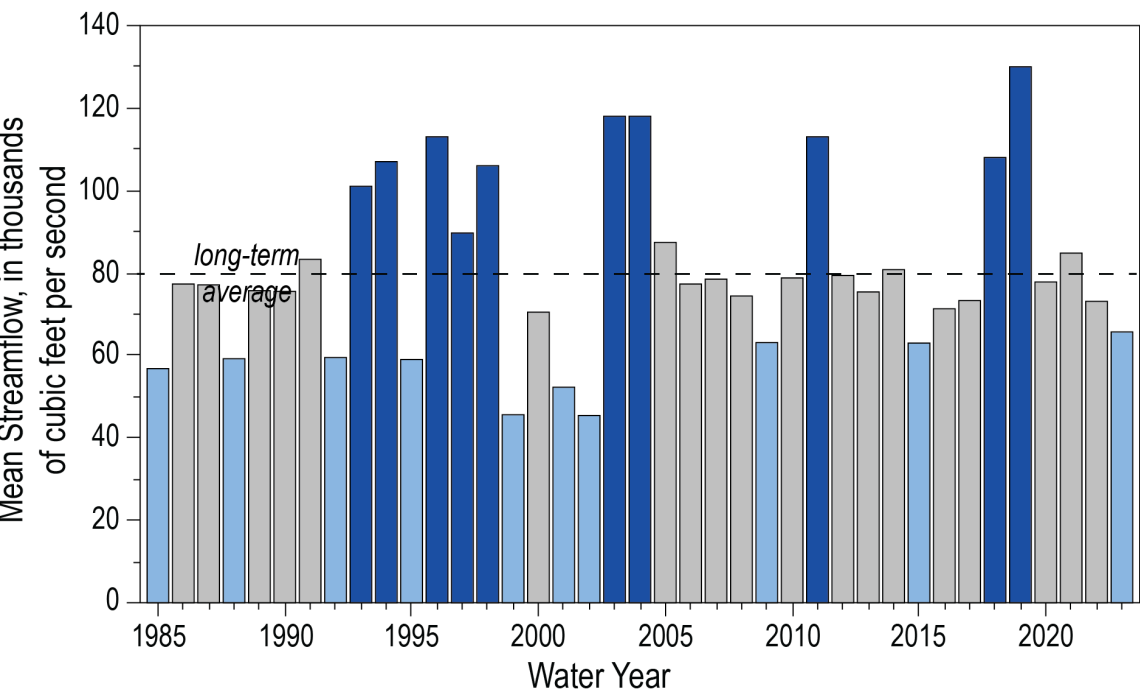


EXPLANATION

- Below 25th percentile of all annual observations
- Between 25th and 75th percentiles of all annual observations
- Above 75th percentile of all annual observations

Water-quality trends are based on **FN loads**, which remove most of the year-to-year differences in streamflow. However, long-term trends in streamflow can affect water-quality trends.

We computed long-term streamflow trends (~1985 – 2023) at the 43 long-term NTN stations.


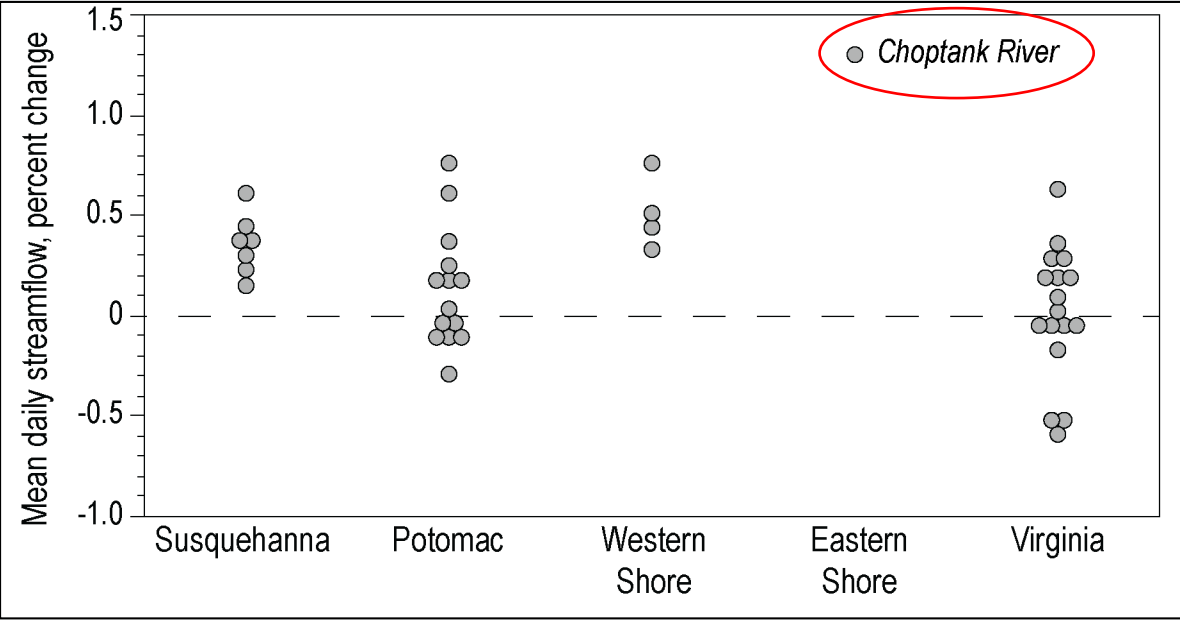


Long-term trends in mean-daily streamflow were only significant at the Choptank River (01491000).

Total Nitrogen (TN): Per-Acre Loads (2019 – 2023 Average)

Per-acre TN loads are typically highest in **agricultural watersheds**¹.



67% of stations have a per-acre load that exceeds a nitrogen planning target of 4.3 lb/ac².

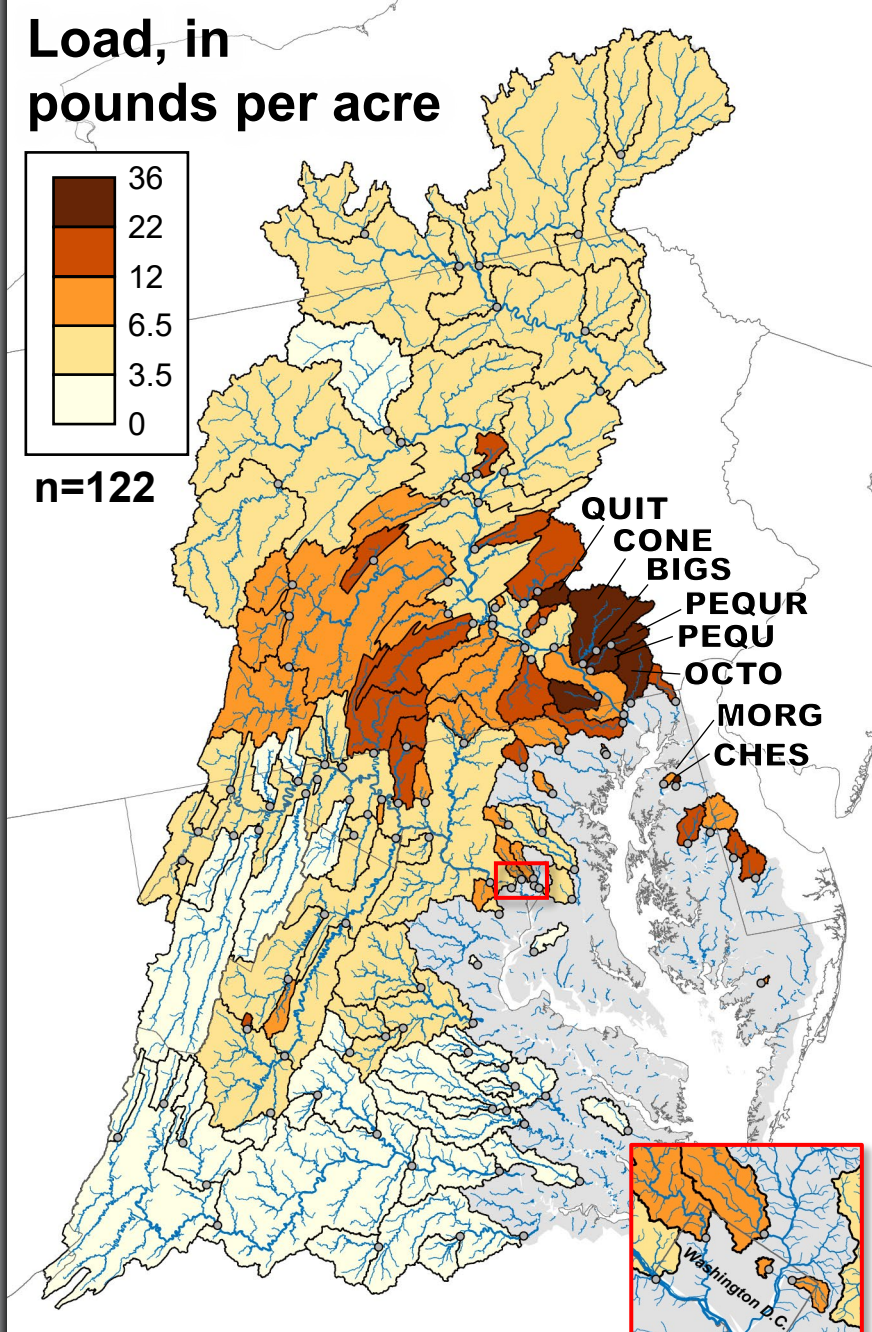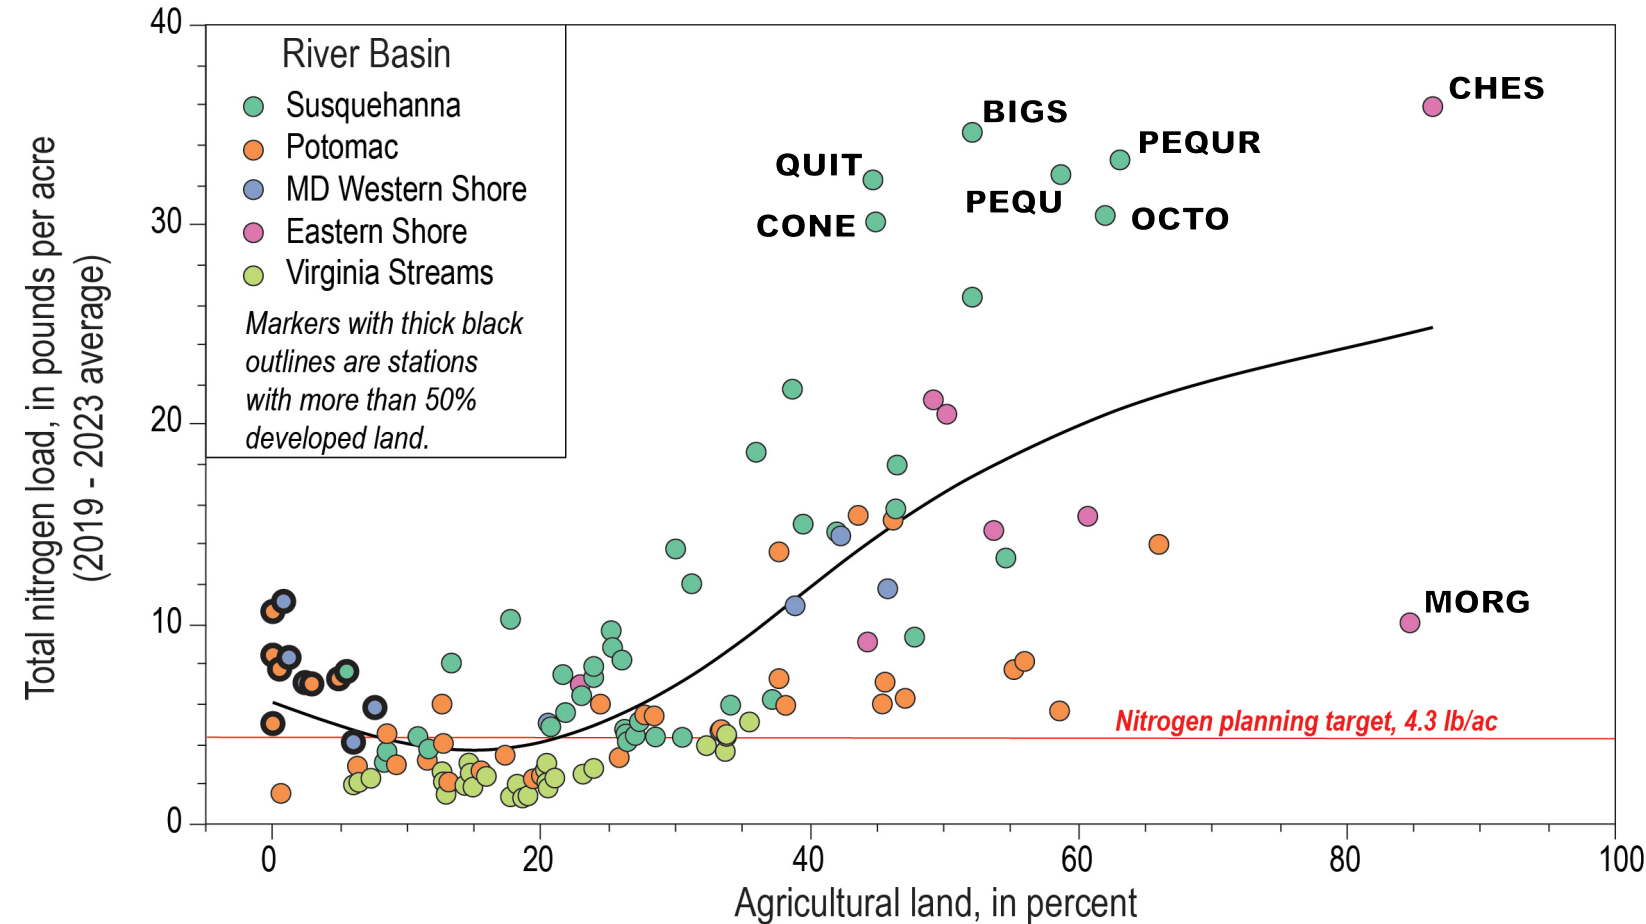

Total Phosphorus (TP): Per-Acre Loads (2019 – 2023 Average)

Per-acre TP loads are typically highest in **developed** and **agricultural** watersheds¹.


75% of stations have a per-acre load that exceeds phosphorus planning target of 0.22 lb/ac².

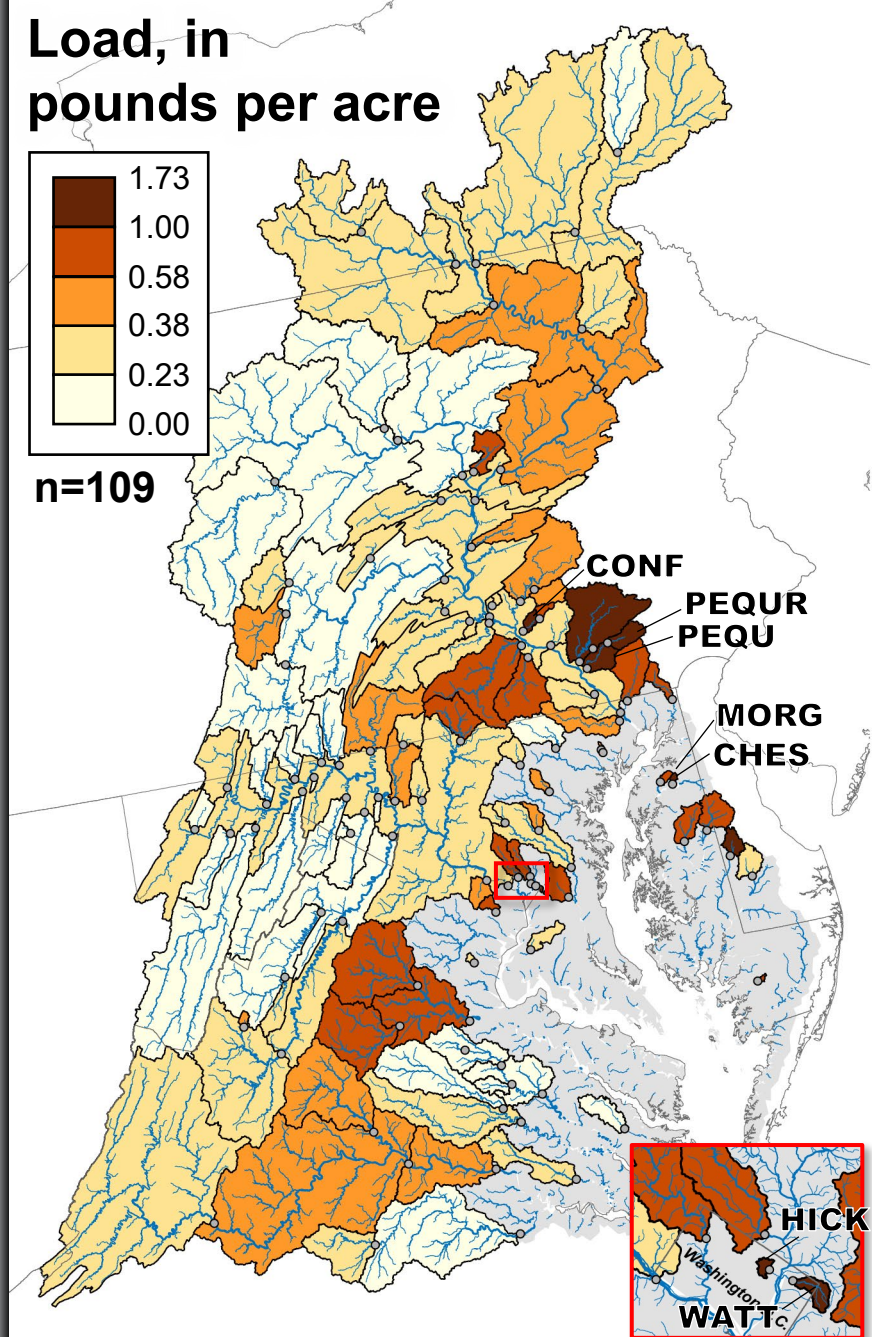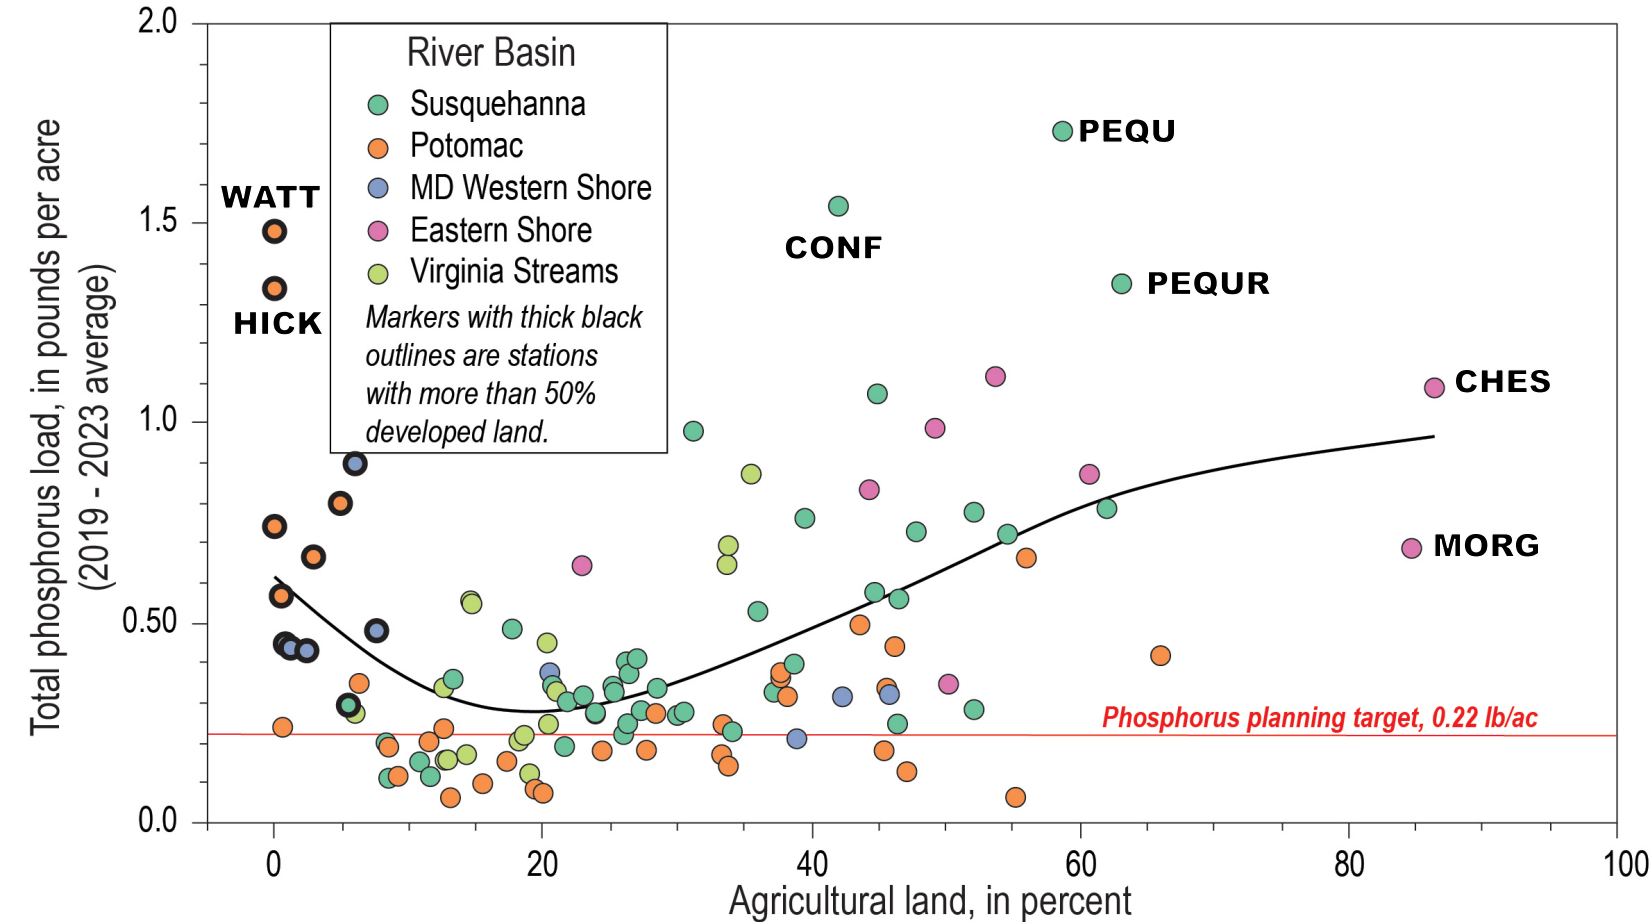


Suspended Sediment (SS): Per-Acre Loads (2019 – 2023 Average)

SS per-acre loads are typically highest in **developed** watersheds¹.


58% of stations have a per-acre load that exceeds a sediment planning target of 184 lb/ac².

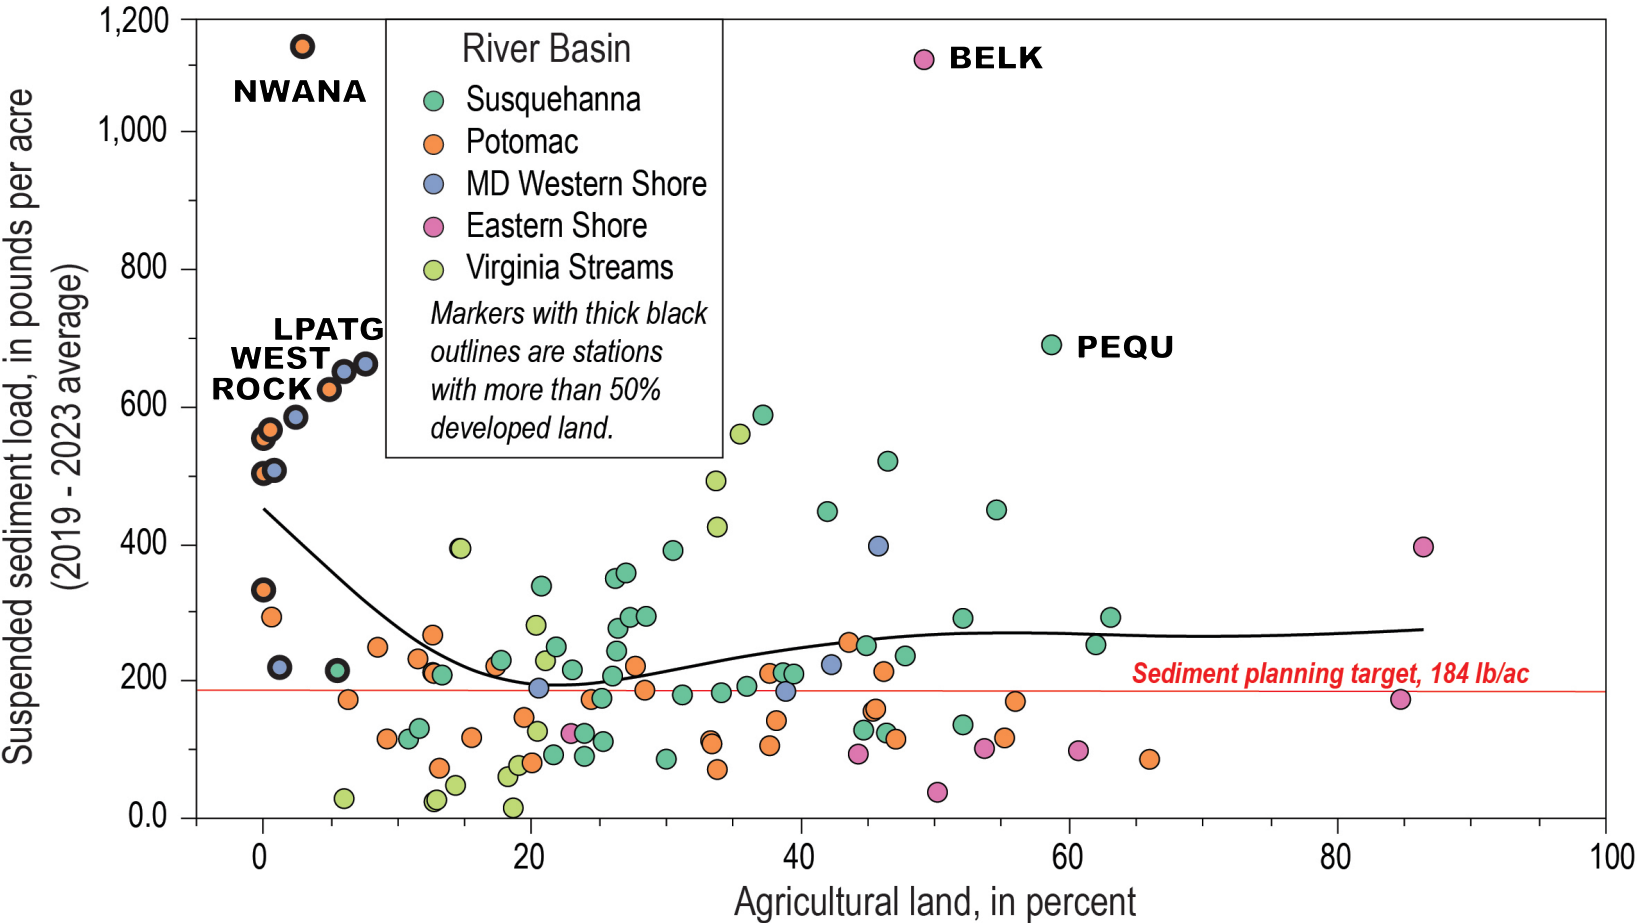

Load, in pounds per acre



n=108

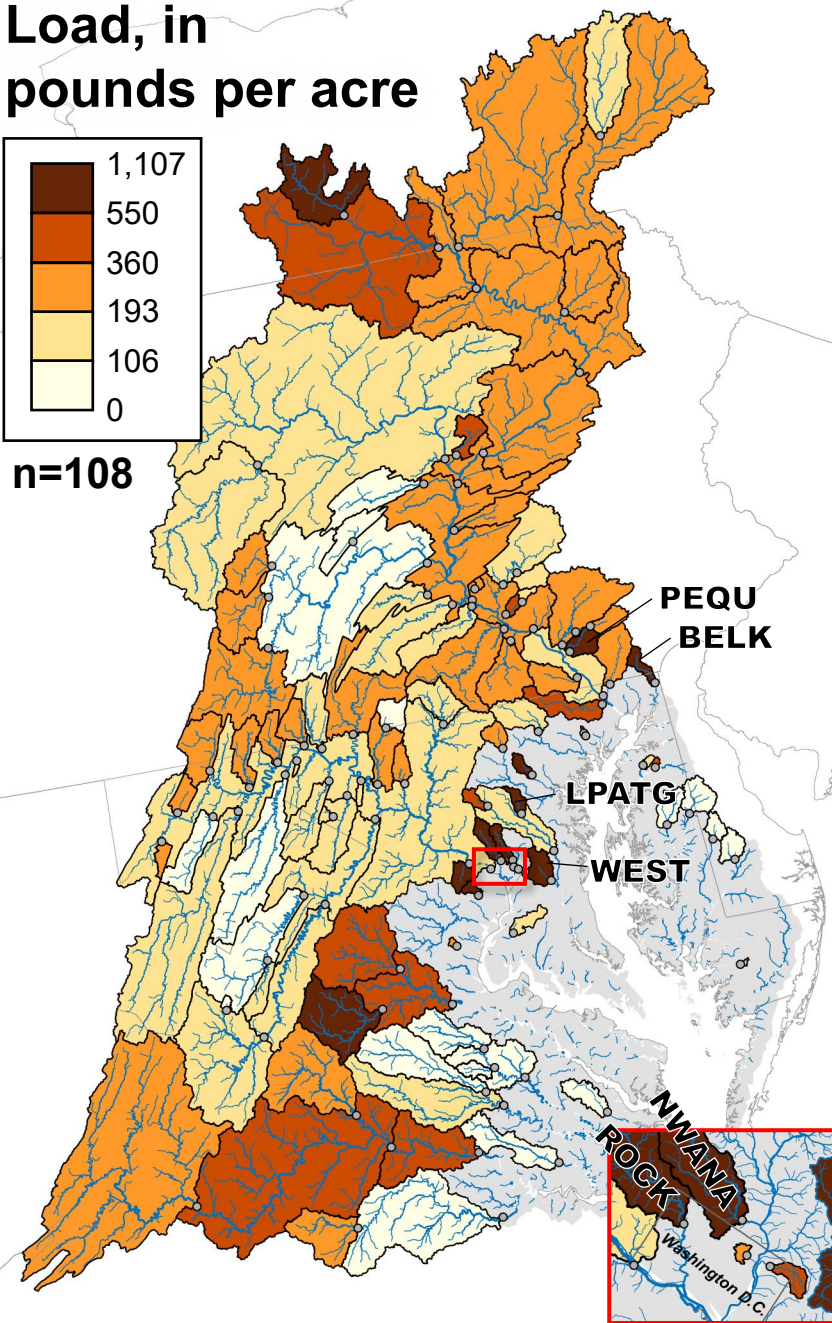







¹Land use conditions in 2023, from National Land Cover Database: <https://doi.org/10.5066/P94UXNTS>

²A sediment planning target for the Chesapeake Bay watershed was summarized from METRIC: wqs.chesapeakebay.net/metric



Nutrient and Sediment Trends

Most long-term¹ nutrient trends improved

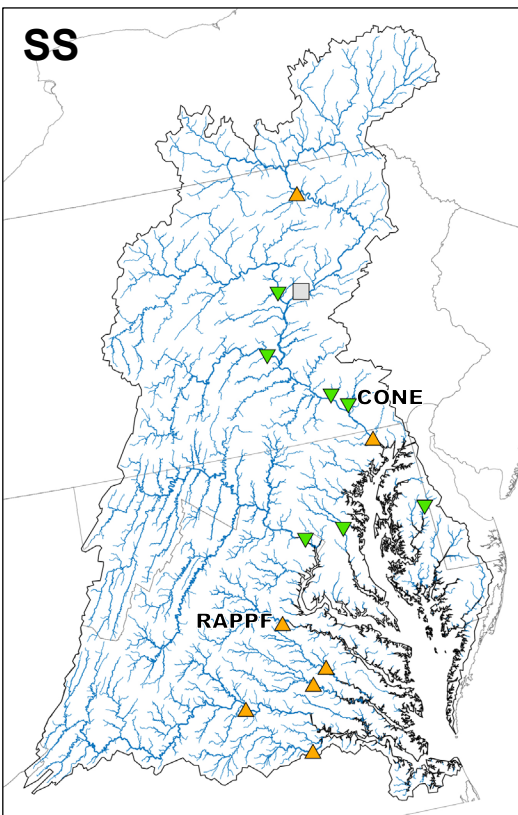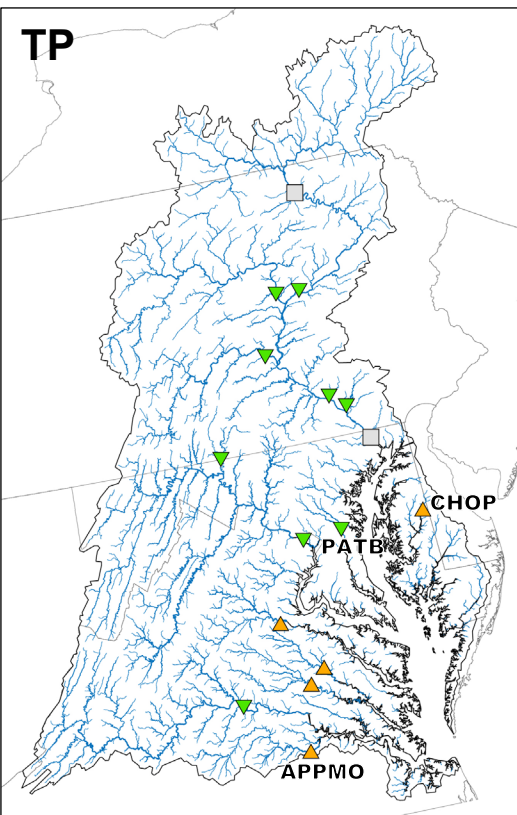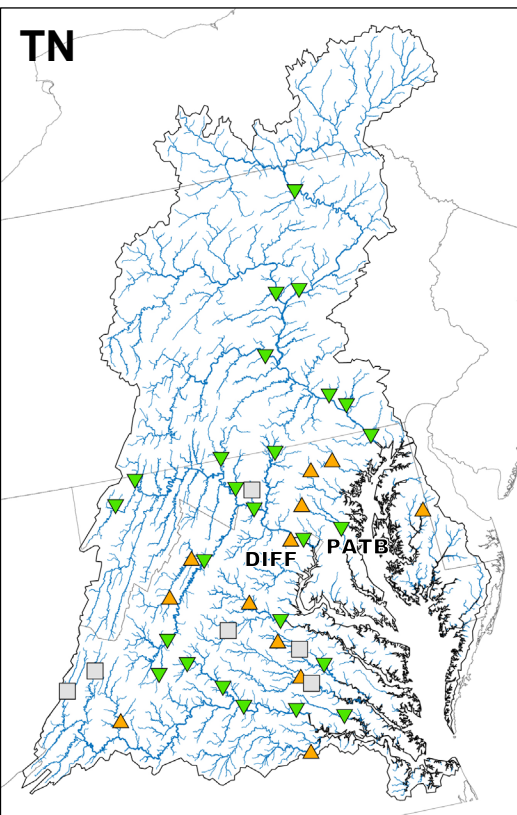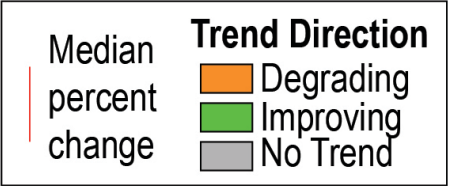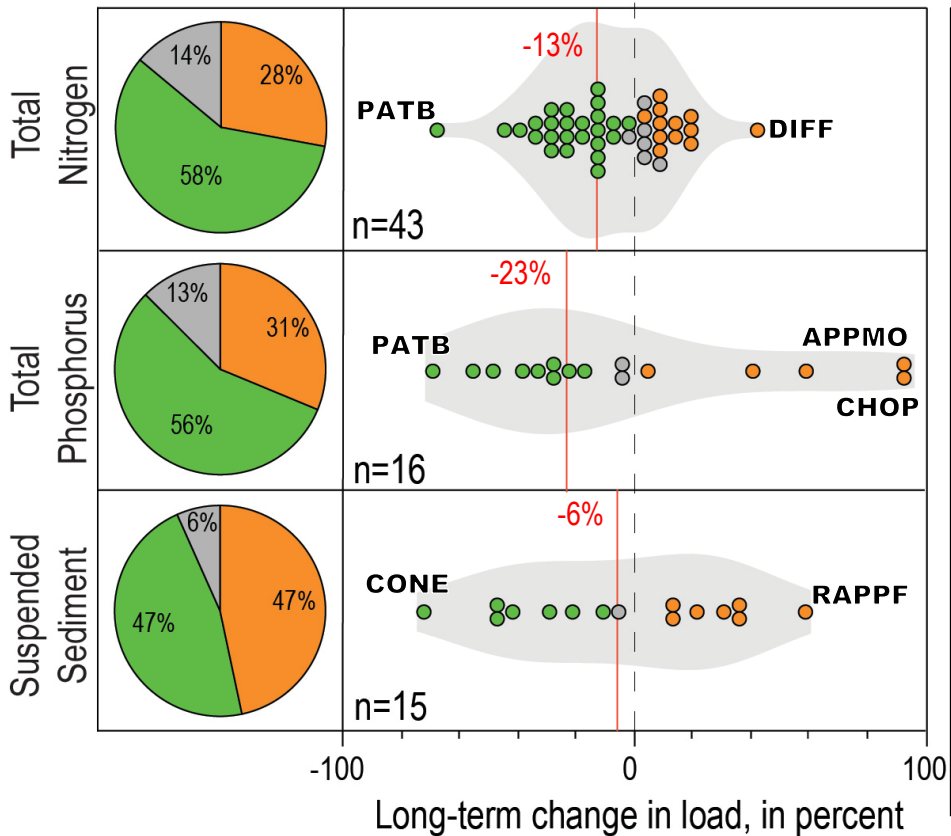

¹Long-term trends are computed from sample records that begin before 1990.

The combined amount of nitrogen, phosphorus, and sediment from NTN stations nearest the Bay all decreased since 2014¹

The Susquehanna (SCONO) and Potomac (POTC) rivers contribute about three-quarters of the total load delivered from 33 NTN stations nearest the Bay.




The NTN monitored area is about **81%** of the Chesapeake Bay watershed area.

Watershed Area

- NTN Watershed
- Chesapeake Bay

Short-Term Trend Direction


- Improving
- Degrading
- No Trend

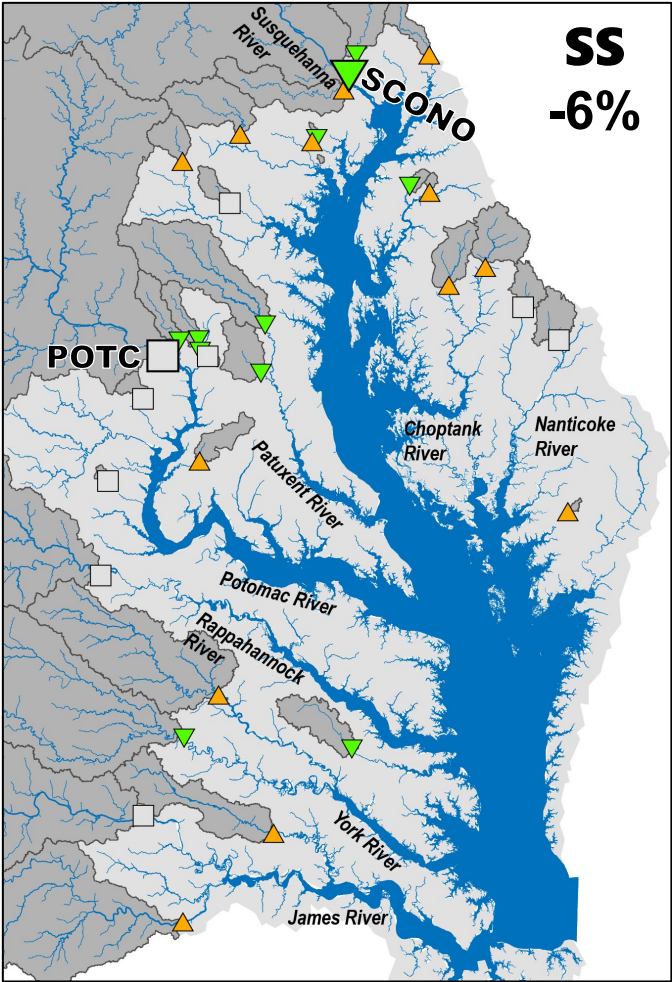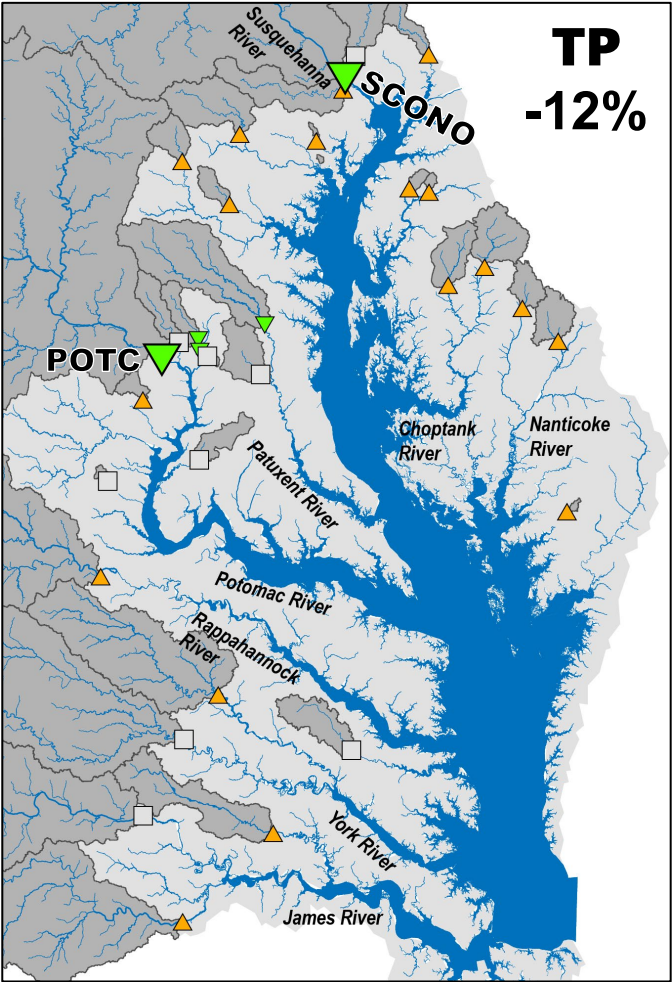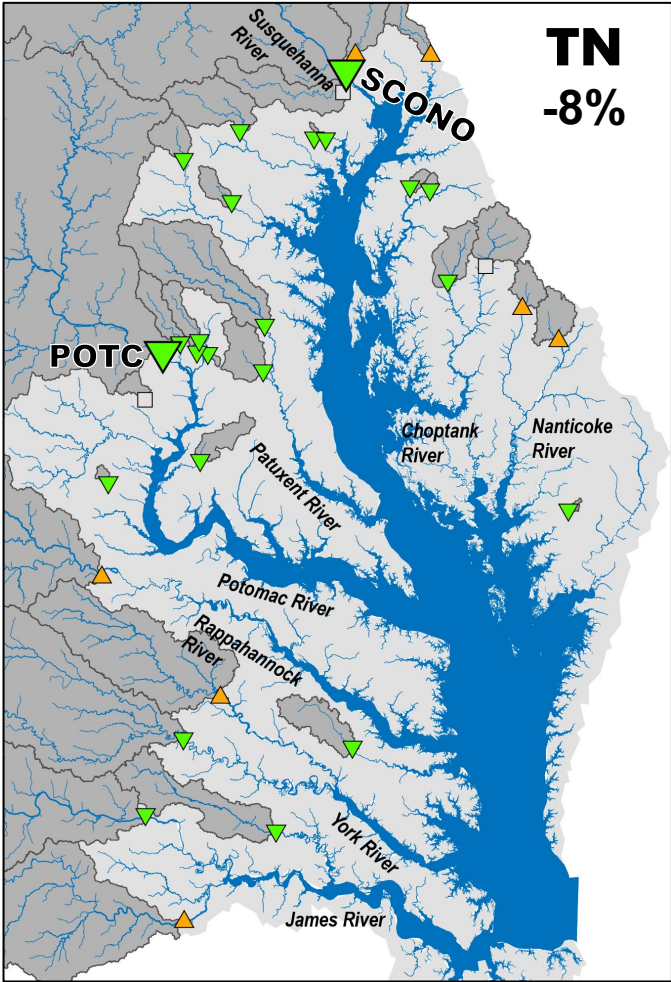

¹Calculated as a change in flow-normalized load from 2014 through 2023 at 33 downstream NTN stations.

Total Nitrogen Trends: 2014 through 2023



Trends, by Percent of Stations (n=120)

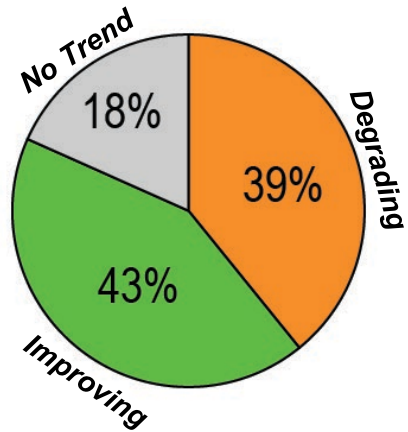

Of the 76 stations that exceed a nitrogen planning target of 4.3 lb/ac¹:


- 47% improved
- 36% degraded
- 17% have no trend

Median percent change = -0.6%

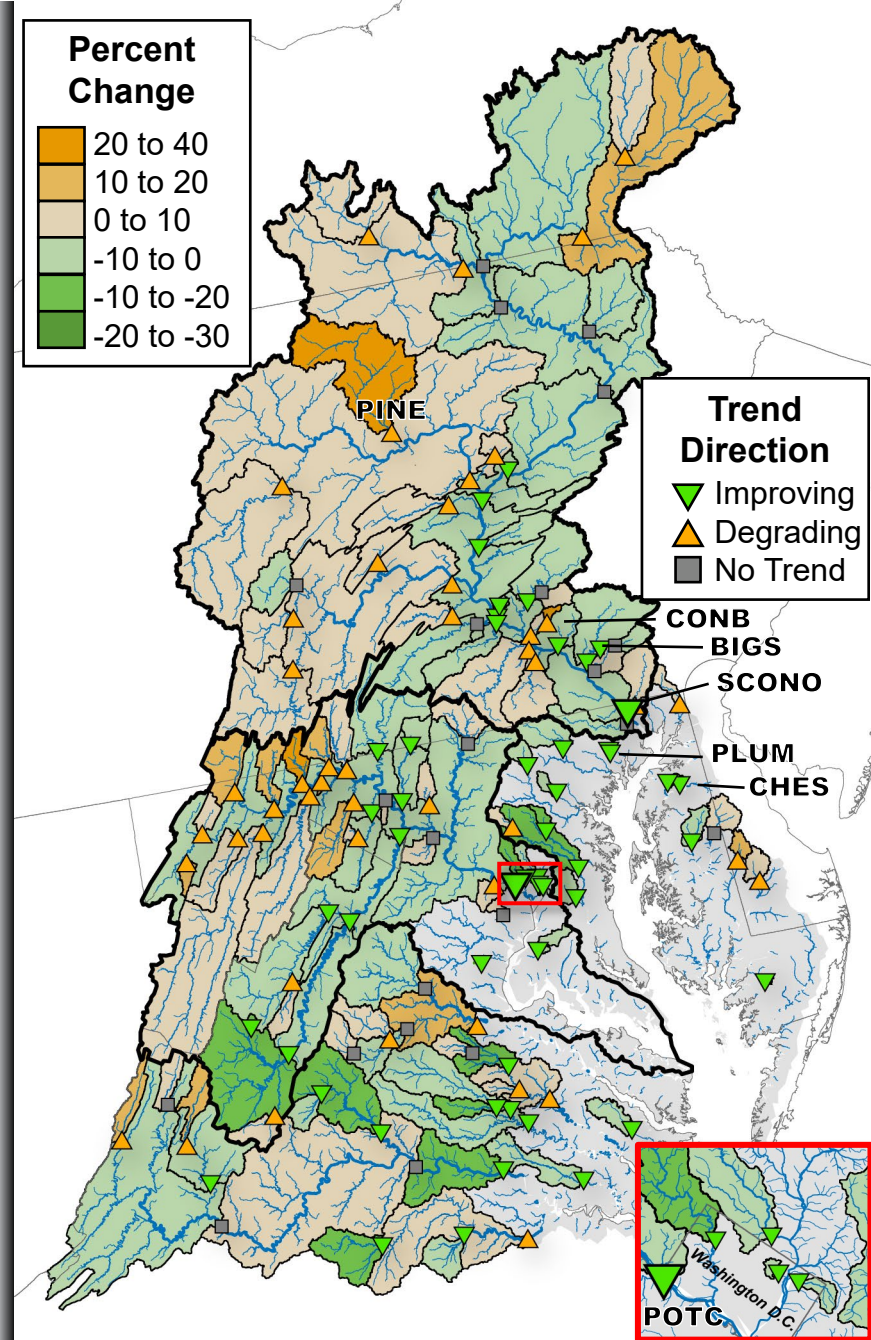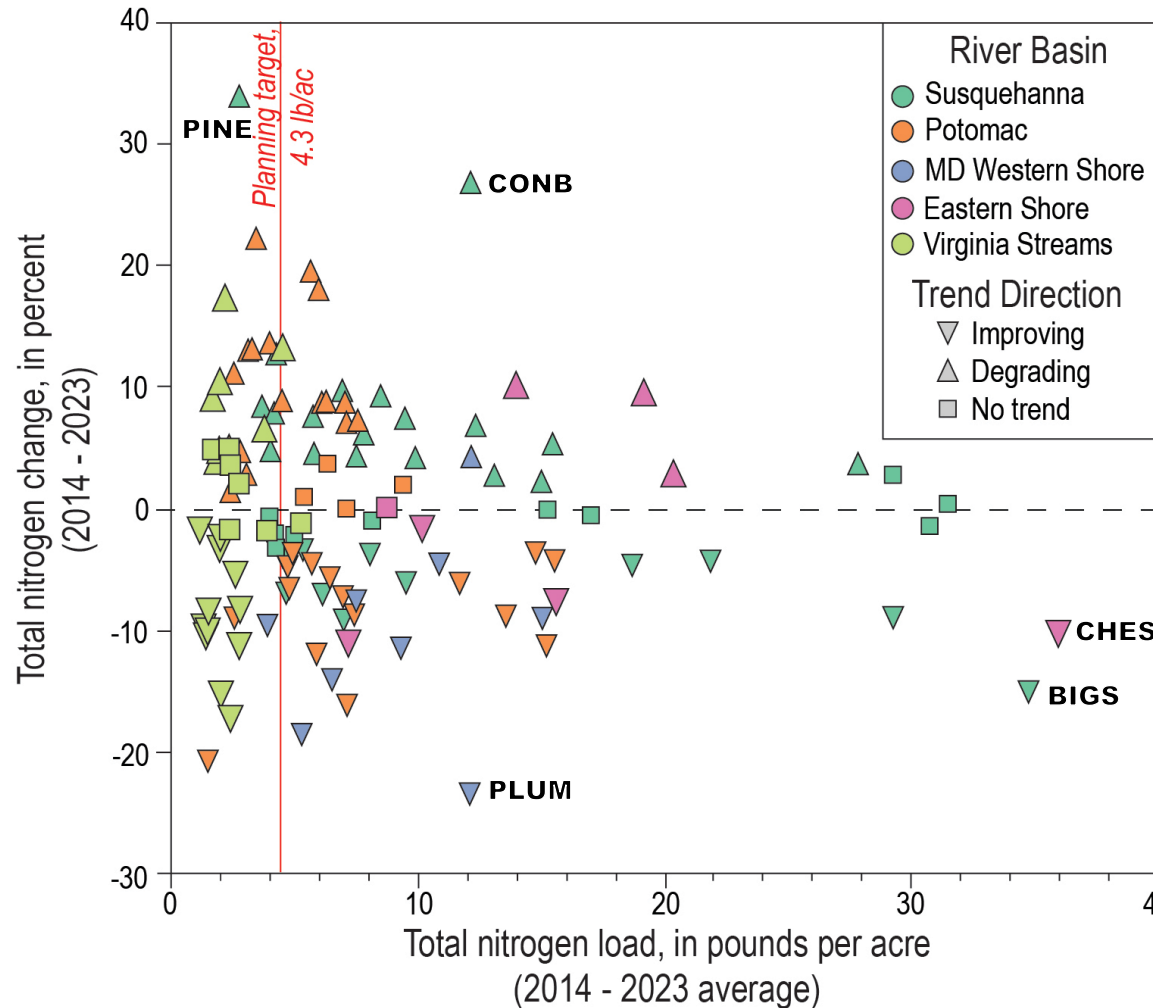

Total Phosphorus Trends: 2014 through 2023



Trends, by Percent
of Stations (n=105)

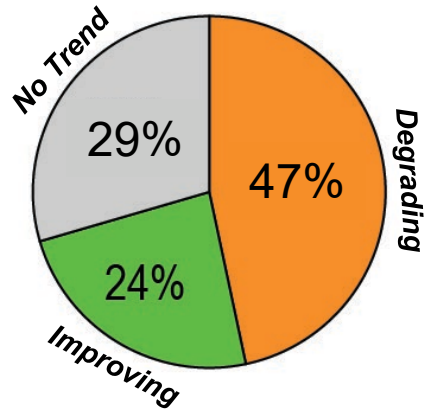

Of the 82 stations that exceed a phosphorus planning target of 0.22 lb/ac¹:


- 23% improved
- 49% degraded
- 28% have no trend

Median percent change = +4.3%

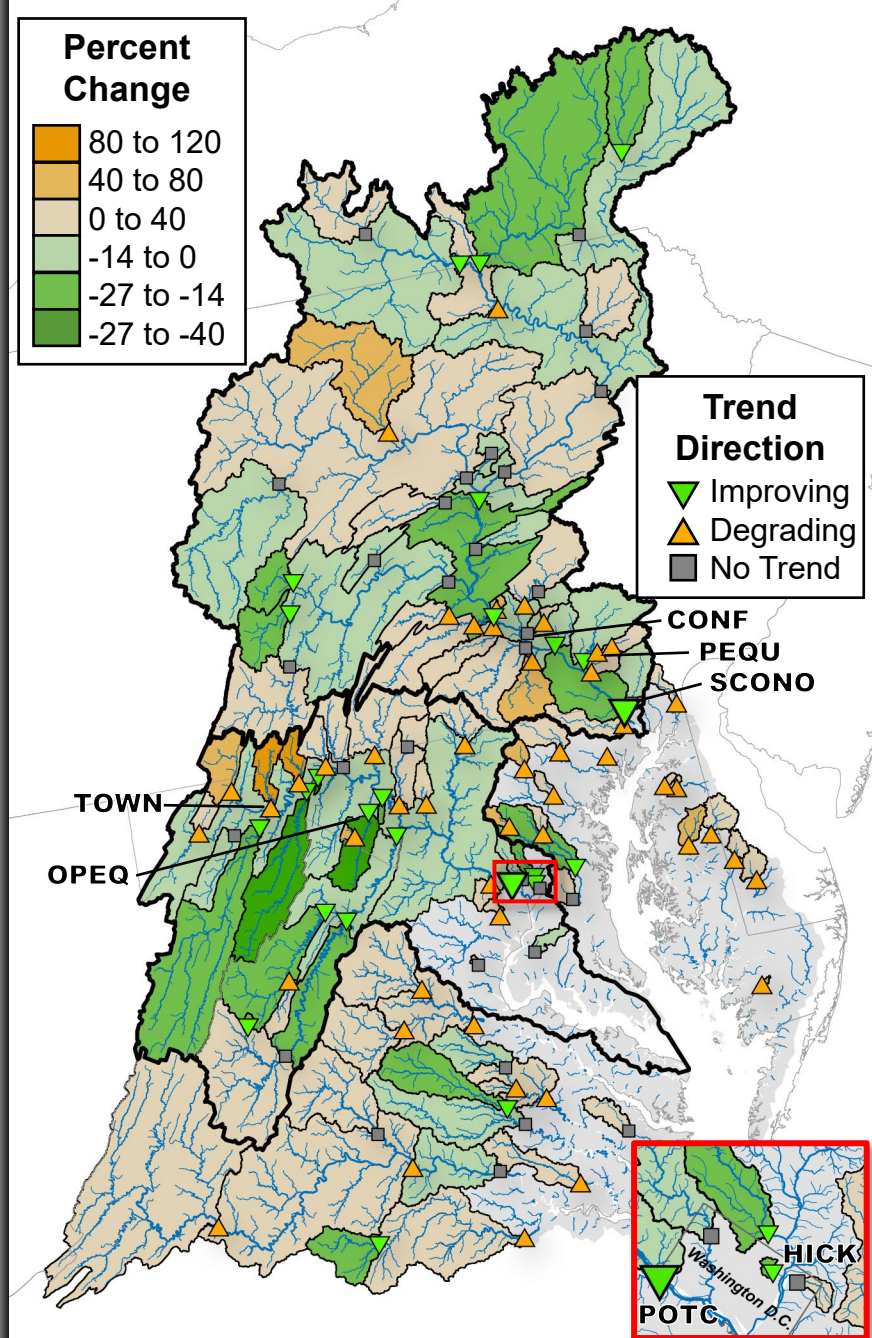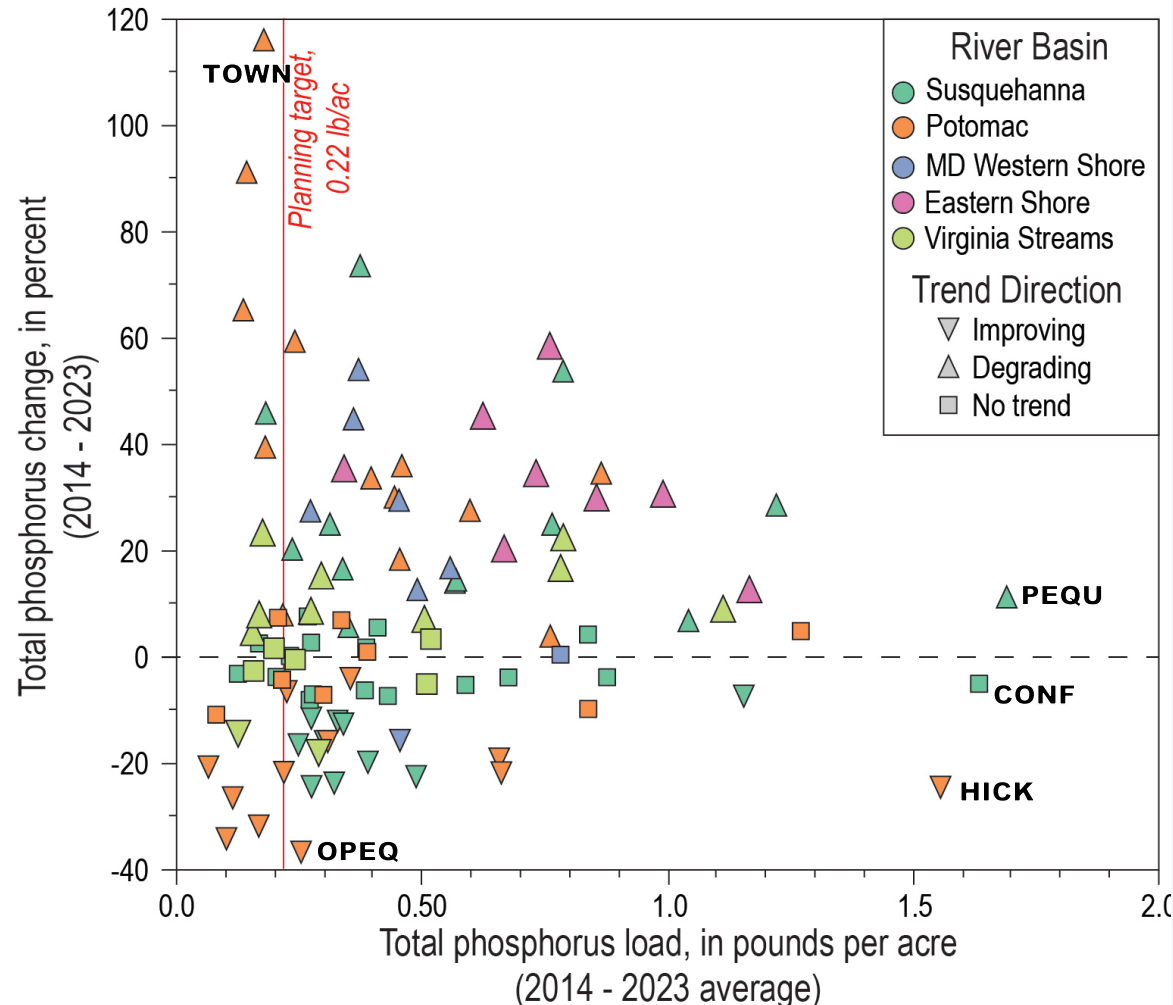

Suspended Sediment Trends: 2014 through 2023



Trends, by Percent of Stations (n=105)

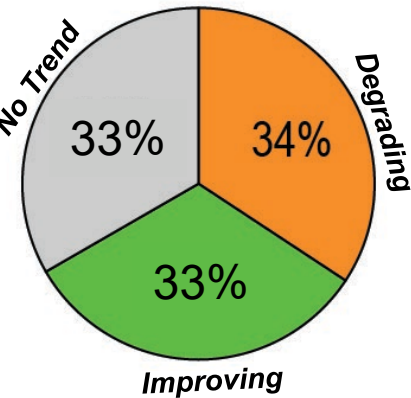

Of the 73 stations that exceed a sediment planning target of 184 lb/ac¹:

- 30% improved
- 34% degraded
- 36% have no trend

Median percent change = +0.8%

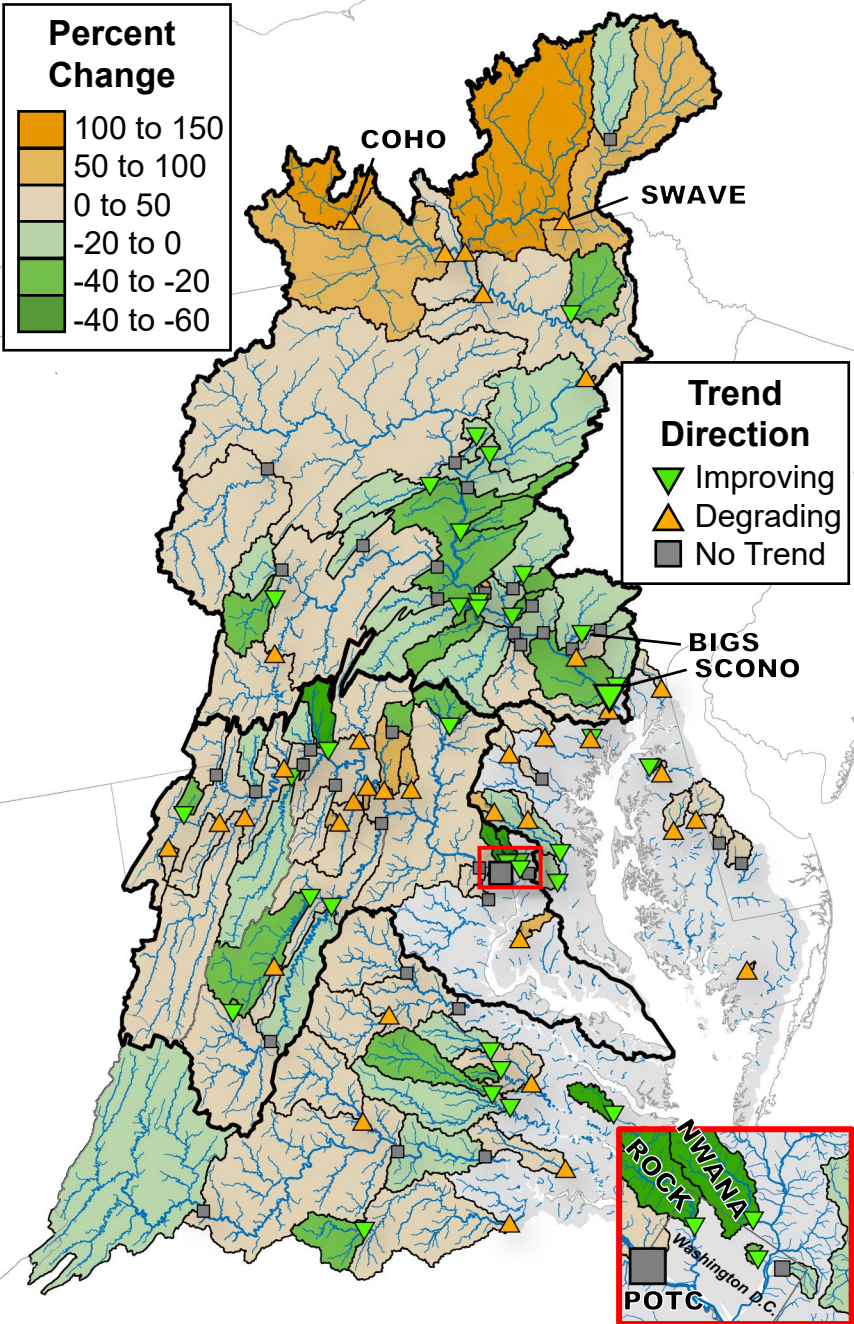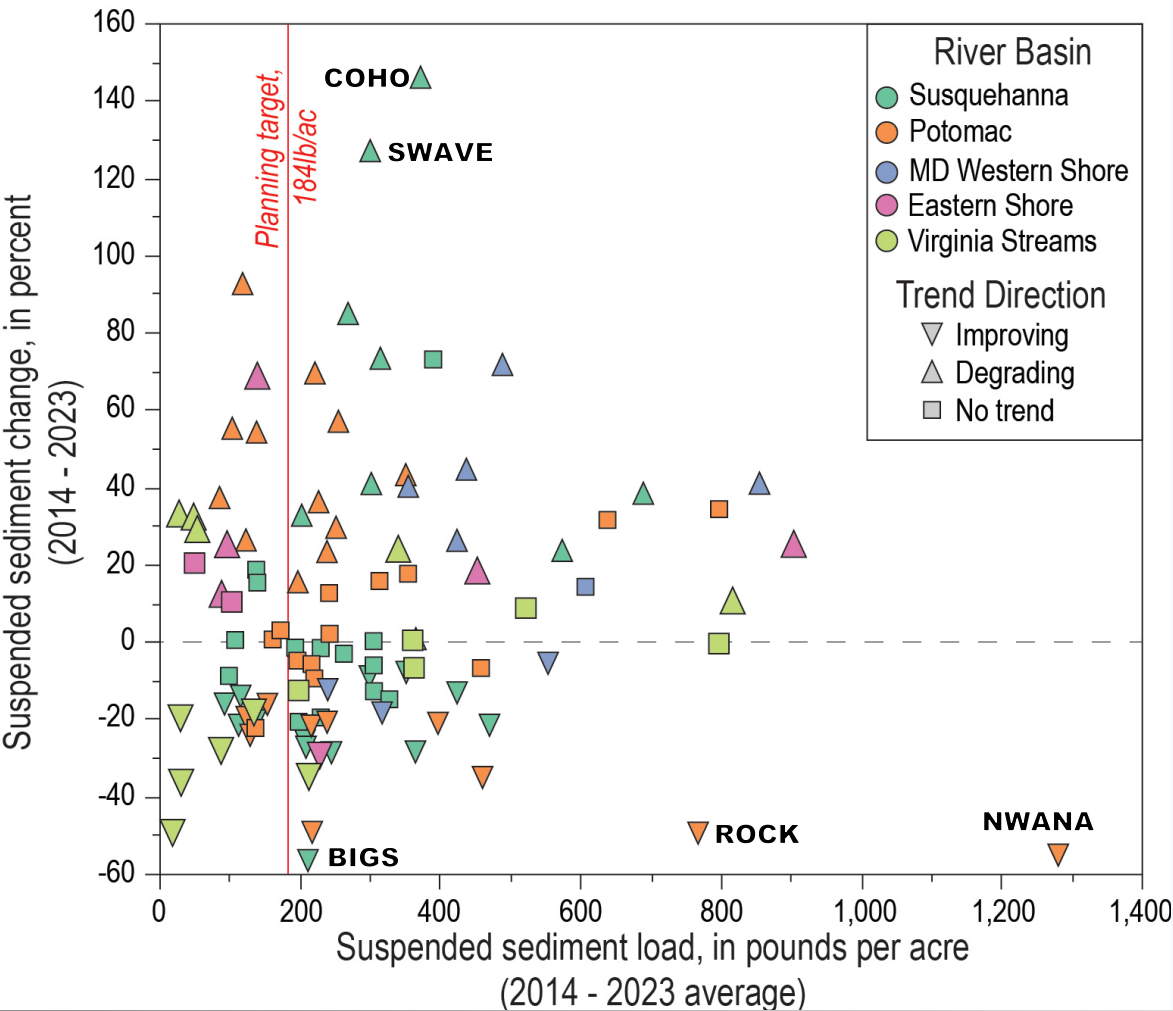



¹A sediment planning target for the Chesapeake Bay watershed was summarized from METRIC: wqs.chesapeakebay.net/metric

Resources to Learn More

Resources are available to learn more about NTN results

The project website includes access to the most recent data and a summary of results¹: usgs.gov/CB-wq-loads-trends

We will be updating an interactive geonarrative, where users can explore results at individual stations in greater detail:
va.water.usgs.gov/geonarratives/ntn

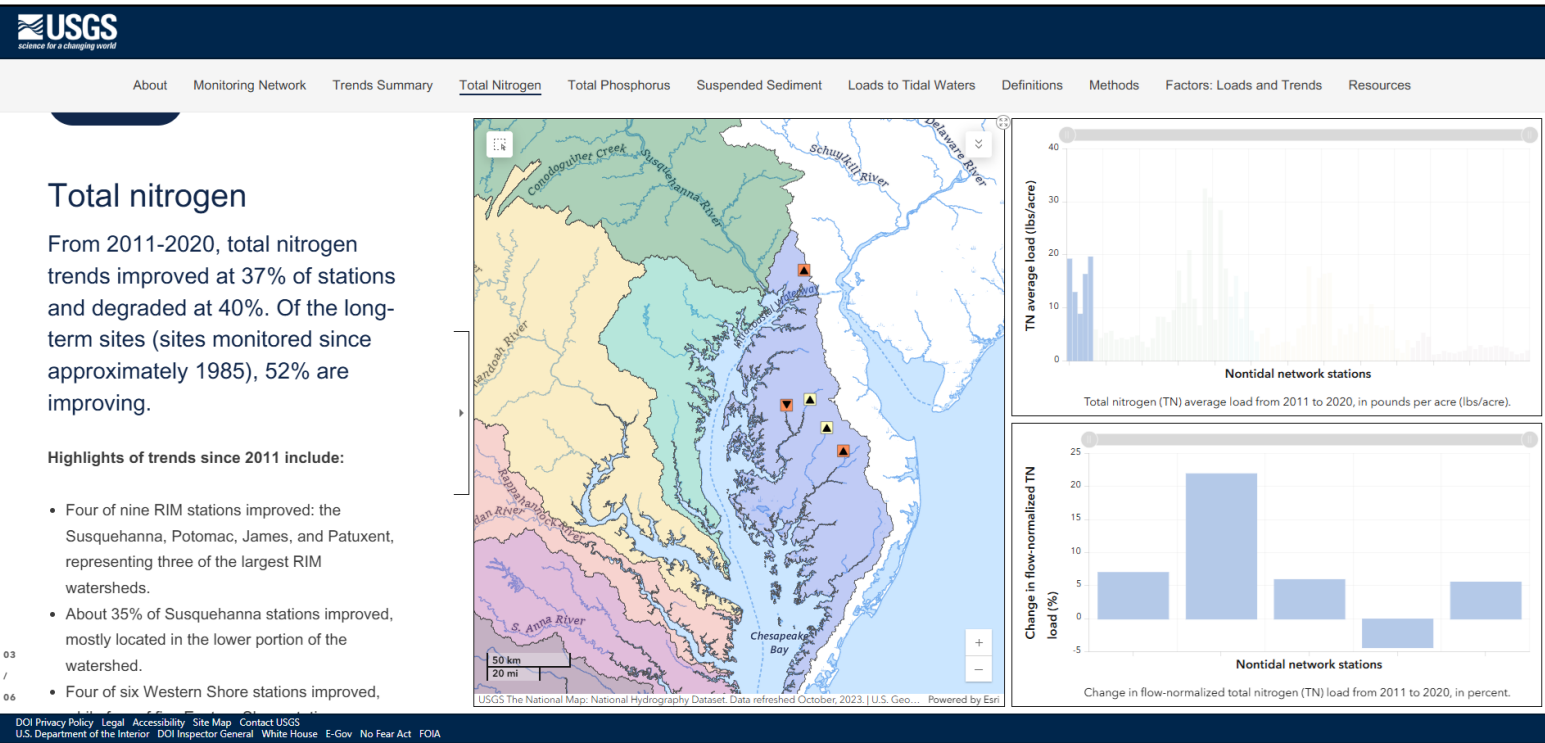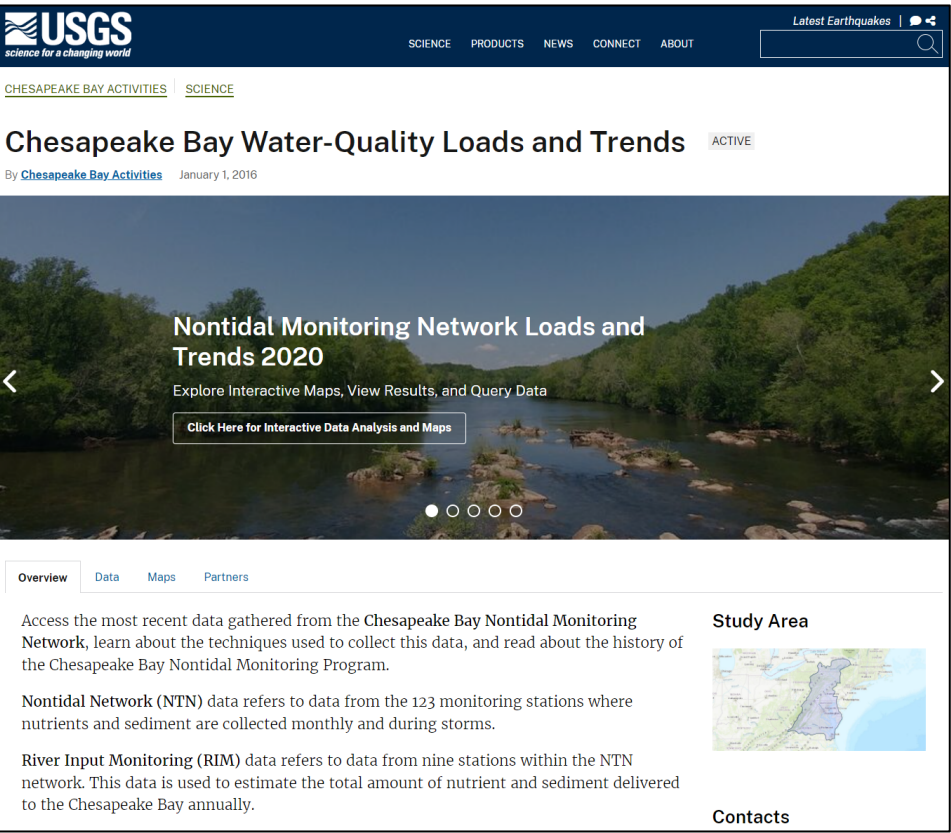

Major Messages: NTN Loads and Trends

1. Loads and trends have been calculated through water year 2023 using reproducible and accurate water-quality datasets.
The quality of NTN data has never been better.
2. Per-acre nutrient and sediment loads are typically highest in agricultural and/or urban watersheds.
3. Most long-term trends of total nitrogen (n=43) and total phosphorus (n=16) ***improved***.
4. The combined amounts of nitrogen, phosphorus, and sediment from NTN stations nearest the Bay all ***decreased*** since 2014.
5. Improving short-term trends (2014 – 2023) of total nitrogen, total phosphorus, and suspended sediment were detected at ***less than half*** of all stations.
6. The USGS will continue to work with Chesapeake Bay partners to evaluate and explain these observed water-quality patterns.



Visit our website to explore these results in more detail:
usgs.gov/CB-wq-loads-trends

Jimmy Webber, jwebber@usgs.gov; Chris Mason, camason@usgs.gov;
James Colgin, jcolgin@usgs.gov; Alex Soroka, asoroka@usgs.gov

Station Dictionary

The following NTN short station names are used throughout this presentation.

Short Name	Station ID	Station Name
APPMO	02041650	APPOMATTOX RIVER AT MATOACA, VA
BELK	01495000	BIG ELK CREEK AT ELK MILLS, MD
BIGS	015765195	BIG SPRING RUN NEAR MYLIN CORNERS, PA
CHES	01493112	CHESTERVILLE BRANCH NEAR CRUMPTON, MD
CHOP	01491000	CHOPTANK RIVER NEAR GREENSBORO, MD
COHO	01529500	COHOCTON RIVER NEAR CAMPBELL NY
CONB	01573695	CONEWAGO CREEK NEAR BELLAIRE, PA
CONE	01576754	CONESTOGA RIVER AT CONESTOGA, PA
CONF	01573710	CONEWAGO CREEK NEAR FALMOUTH, PA
DIFF	01646000	DIFFICULT RUN NEAR GREAT FALLS, VA
HICK	01651770	HICKEY RUN AT NEW YORK AVE AT WASHINGTON, DC
LPATG	01593500	LITTLE PATUXENT RIVER AT GUILFORD, MD
MORG	01493500	MORGAN CREEK NEAR KENNEDYVILLE, MD
NWANA	01651000	NW BR ANACOSTIA RIVER NR HYATTSVILLE, MD
OCTO	01578475	OCTORARO CREEK NEAR RICHARDSMERE, MD

Short Name	Station ID	Station Name
OPEQ	01616500	OPEQUON CREEK NEAR MARTINSBURG, WV
PATB	01594440	PATUXENT RIVER NEAR BOWIE, MD
PEQU	01576787	PEQUEA CREEK AT MARTIC FORGE, PA
PEQR	01576767	PEQUEA CREEK NEAR RONKS, PA
PINE	01549700	PINE CREEK BL L PINE CREEK NEAR WATERVILLE, PA
PLUM	01581752	PLUMTREE RUN NEAR BEL AIR, MD
POTC	01646580	POTOMAC RIVER AT CHAIN BRIDGE, AT WASHINGTON, DC
QUIT	01573160	QUITTAPAHILLA CREEK NEAR BELLEGROVE
RAPPF	01668000	RAPPAHANNOCK RIVER NEAR FREDERICKSBURG, VA
ROCK	01648010	ROCK CREEK AT JOYCE ROAD, WASHINGTON, DC
SCONO	01578310	SUSQUEHANNA RIVER AT CONOWINGO, MD
SWAVE	01515000	SUSQUEHANNA RIVER NEAR WAVERLY NY
TOWN	01609000	TOWN CREEK NEAR OLDTOWN, MD
WATT	01651800	WATTS BRANCH AT WASHINGTON, DC
WEST	01594526	WESTERN BRANCH AT UPPER MARLBORO, MD